

Cotterman®

ADJUSTABLE
**SELF-CLOSING
SAFETY GATE**

PROTECTS PERSONNEL FROM ACCIDENTALLY
FALLING THROUGH OPENINGS

Distributed by:

— EST. 1975 —


INDUSTRIAL
LADDER & SUPPLY CO.

Toll-Free: 1-800-833-0800
WWW.INDUSTRIALLADDER.COM

PRODUCT FEATURES

ADJUSTABLE

SELF-CLOSING SAFETY GATE

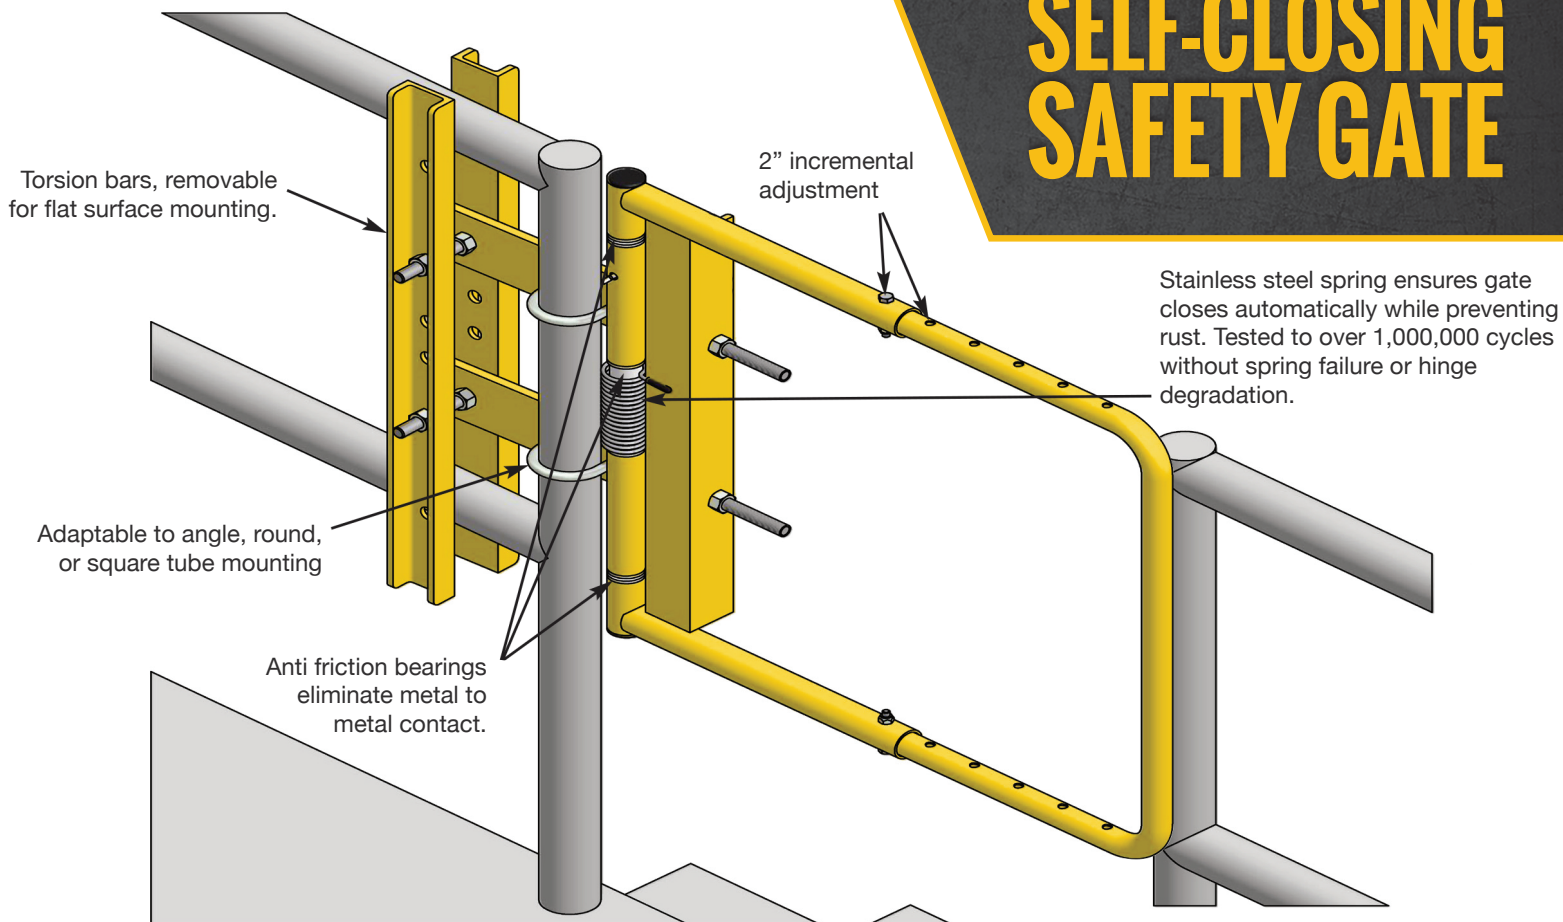

Tested to over 1,000,000 cycles without spring failure or hinge degradation. Stainless Steel spring ensures gate closes automatically while preventing rust.

Anti-friction bearings provide smooth operation and long life, eliminating metal to metal contact



- Versatile, can be mounted to round rail, square rail, angular rail of up to 2", or a firm reinforced wall surface
- Stainless steel spring closes the gate after each pass thru.
- Unique gate width is available in two adjustable size ranges: to fit openings of 16" to 24" or 24" to 38". Gate width is adjustable in 2" increments.
- Available in safety yellow or gray powder coated finish with zinc rich powder coat primer for corrosion resistance, or stainless steel construction.

Item No.	Fits Clear Opening	Finish
AG1626ZC1	16" - 24"	Gray powder top coat*
AG2440ZC1	24" - 38"	Gray powder top coat*
AG1626ZC2	16" - 24"	Safety yellow powder top coat*
AG2440ZC2	24" - 38"	Safety yellow powder top coat*
AG1626S	16" - 24"	Stainless Steel
AG2440S	24" - 38"	Stainless Steel

*zinc rich powder-coat primer

Application: Intended for use with OSHA approved 42" guardrail systems. Cotterman® Adjustable Self Closing Safety Gates meet OSHA 1910 Subpart D, and ANSI-A1264.1.

Cotterman®

www.cotterman.com • info@cotterman.com

130 Seltzer Rd.
Croswell, MI 48422
810-679-4400 • FAX 810-679-4510
TOLL FREE 800-5-LADDER
8 A.M. – 5 P.M. MON. THRU FRI.
(EASTERN STANDARD TIME)