Cotterman® SPECIAL PURPOSE LADDERS

POWDER COAT TOUGH™

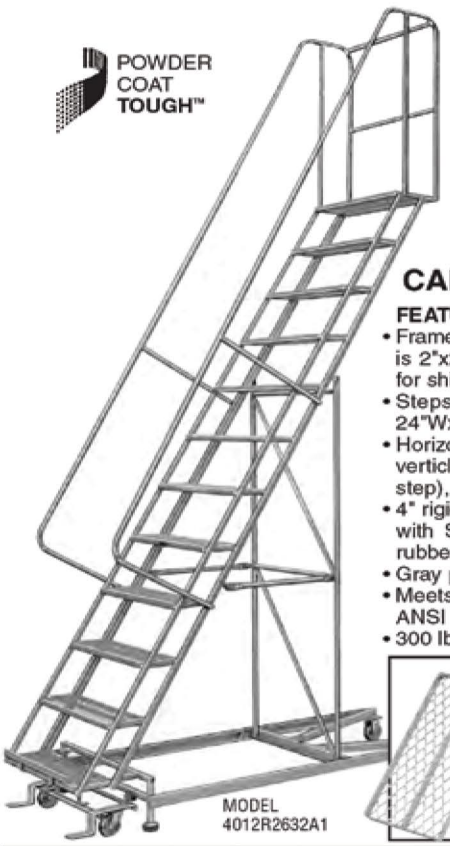

MODEL 4012R2632A1

SERIES 4000 CANTILEVER LADDERS

FEATURES:

- Framework is 1" O.D. steel tubing. Base is 2"x2"x1/4" steel angle. Can be folded for shipping or storing.
- Steps are 24"Wx7"D. Top step is 24"Wx10"D (24"Wx20"D with E4-20).
- Horizontal distance from rear of base to verticle support is 32" (8-12 step), 26" (7 step), 20" (6 step), and 14" (5 step).
- 4" rigid castes on rear, 4" swivel casters with SafeLock on front, and 2 1/2" dia. rubber pads on legs.
- Gray powder coat is standard finish.
- Meets OSHA 1910 Subpart D, and ANSI A14.7 standards.
- 300 lb. load rating.

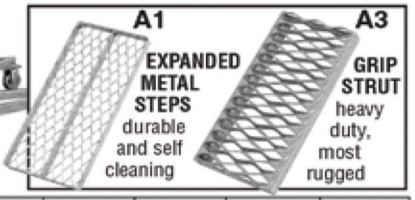

NO. STEPS	PLAT. HT.	O.A. HT.	BASE W"xL"	SHPG. WT.	MODEL NO.	A1 TREAD	A1 TREAD W/E4-20	A3 TREAD	A3 TREAD W/E4-20
5	50"	80"	32x41	151	**4005R2632**				
6	60"	90"	32x47	174	**4006R2632**				
7	70"	100"	32x53	192	**4007R2632**				
8	80"	110"	32x59	212	**4008R2632**				
9	90"	120"	32x66	230	**4009R2632**				
10	100"	130"	32x73	253	**4010R2632**				
11	110"	140"	32x79	272	**4011R2632**				
12	120"	162"	32x85	393	**4012R2632**				

MODEL 1AWP2424A5-8

ADJUSTABLE ONE STEP WORK PLATFORMS

Adjusts 5" to 8" or 9" to 14", to meet your varying work levels. Platforms may be placed side by side or end to end for greater standing area. Grip strut surface, gray powder coat finish is standard.

MODEL NO.	HT. ADJ.	SIZE L"xW"	NO. LEGS	SHPG. WT.	PRICE
1AWP2424A5-8	5"-8"	24x24	4	25	
1AWP2436A5-8	5"-8"	36x24	4	37	
1AWP2448A5-8	5"-8"	48x24	4	39	
1AWP2460A5-8	5"-8"	60x24	6	51	
1AWP2472A5-8	5"-8"	72x24	6	59	
1AWP2496A5-8	5"-8"	96x24	6	74	
1AWP2424A9-14	9"-14"	24x24	4	29	
1AWP2436A9-14	9"-14"	36x24	4	36	
1AWP2448A9-14	9"-14"	48x24	4	43	
1AWP2460A9-14	9"-14"	60x24	6	58	
1AWP2472A9-14	9"-14"	72x24	6	66	
1AWP2496A9-14	9"-14"	96x24	6	81	

SERIES 5000 STOCK AND ORDER PICKING LADDERS

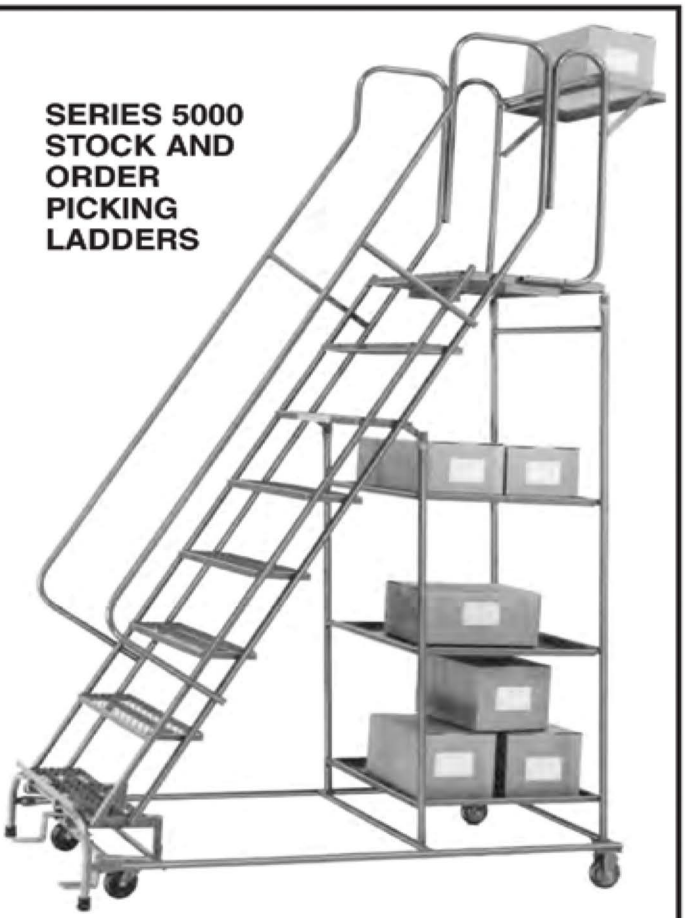

Cotterman series 5000 all-welded steel stockpicking safety ladders offer the advantages of a rugged one-piece welded ladder with the versatility of a stockpicking truck. Available in six (6) different heights, each unit has two (6-7 step) or three (8-11 step) 24"x24" heavy gauge steel shelves plus a 24"Wx20"D top step with 10" folding platform workshelf. They are fabricated from heavy duty 1" O.D. tubular steel and have a combined 500 lb. load rating consisting of 300 lbs. for the ladder and 200 lbs. for the storage shelves. Gray powder coat finish standard.

NO. OF STEPS INCL. TOP STEP	TOP STEP HEIGHT	OVERALL HEIGHT	MODEL NO.	BASE W"xL"	SHPG. WT.	PRICE
6	60"	90"	**5006R2630**	30x56	195	
7	70"	100"	**5007R2630**	30x63	226	
8	80"	110"	**5008R2632**	32x68	231	
9	90"	120"	**5009R2632**	32x75	247	
10	100"	130"	**5010R2632**	32x83	259	
11	110"	140"	**5011R2632**	32x88	281	

Distributed by:

EST. 1975
INDUSTRIAL LADDER & SUPPLY CO.

Toll-Free: 1-800-833-0800
WWW.INDUSTRIALLADDER.COM

Cotterman®

Easy 50

POWDER COATED TOUGH™

SERIES PC
PORTABLE CROSSOVER LADDERS

These rugged one piece welded steel crossovers are constructed of 1" dia. steel tubing with 24" wide treads. Portable steel crossovers are easily moved from place to place. The rubber tipped legs hold unit firmly while in use. Easy 50° climbing angle.

Complies with all applicable requirements of OSHA 1910 Subpart D, and ANSI A14.7 standards. Comes in standard gray powder coat finish.

MODEL	NO. STEPS INCL. PLAT.	"H" CLEAR HT.	"W" CLEAR W.	O.A. HT.	"L" BASE L.	SHPG. WT.	A1 TREAD PRICE	A3 TREAD PRICE
3PC24	3	28"	10"	60"	58"	87		
3PC36	3	28"	22"	60"	69"	96		
3PC48	3	28"	32"	60"	82"	122		
4PC24	4	38"	10"	70"	76"	110		
4PC36	4	38"	22"	70"	87"	119		
4PC48	4	38"	32"	70"	100"	145		
5PC24	5	48"	10"	80"	93"	134		
5PC36	5	48"	22"	80"	104"	142		
5PC48	5	48"	32"	80"	116"	168		
5PC60	5	48"	46"	80"	128"	191		
6PC24	6	58"	10"	90"	110"	157		
6PC36	6	58"	22"	90"	121"	166		
6PC48	6	58"	32"	90"	134"	192		
6PC60	6	58"	46"	90"	146"	215		

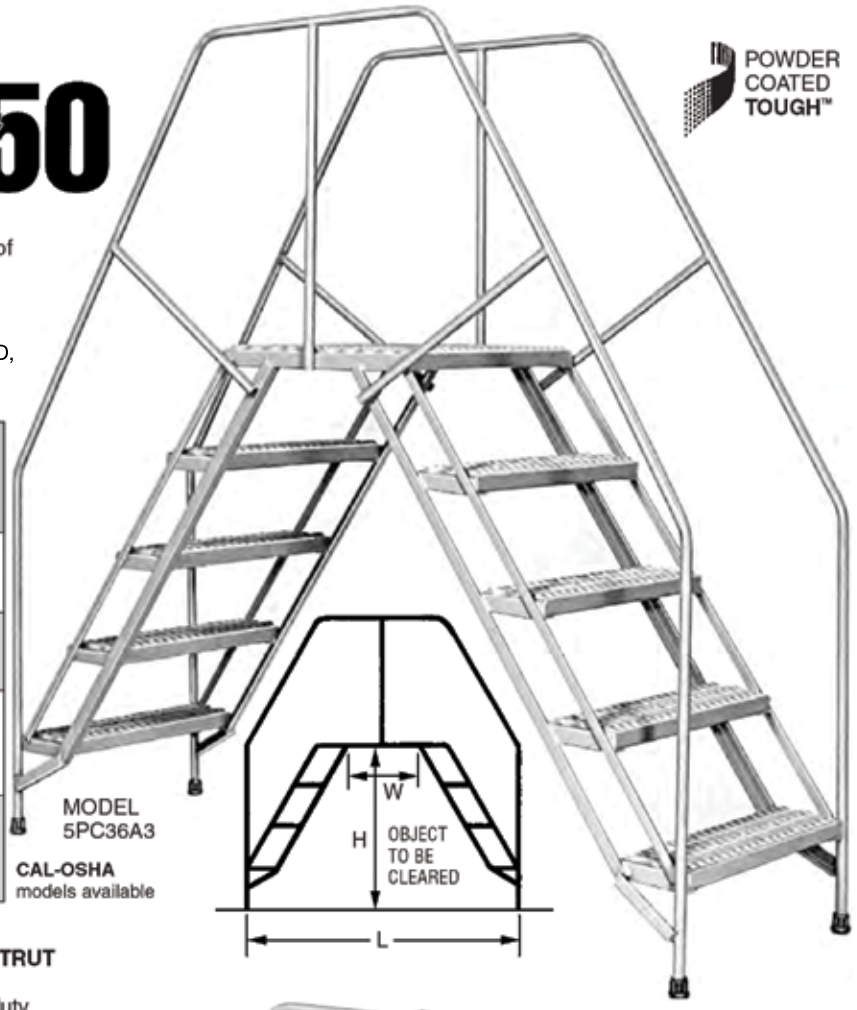

MODEL 5PC36A3

CAL-OSHA models available

A1 **EXPANDED METAL STEPS** durable and self cleanig



A3 **GRIP STRUT STEPS** heavy duty, most rugged

SERIES 3000
ACCESS LADDERS—TWIN STEP

Access from both sides makes these welded steel ladders ideal for narrow aisle use. Steps are 7" deep and the platform is 20" deep. Units have spring loaded 2" ball bearing swivel casters. Gray powder coat is standard.

UNIT ROLLS, POSITIONS EASILY WITHOUT LIFTING

CASTERS RETRACT TO KEEP LADDER FROM ROLLING WHEN USER STANDS ON IT

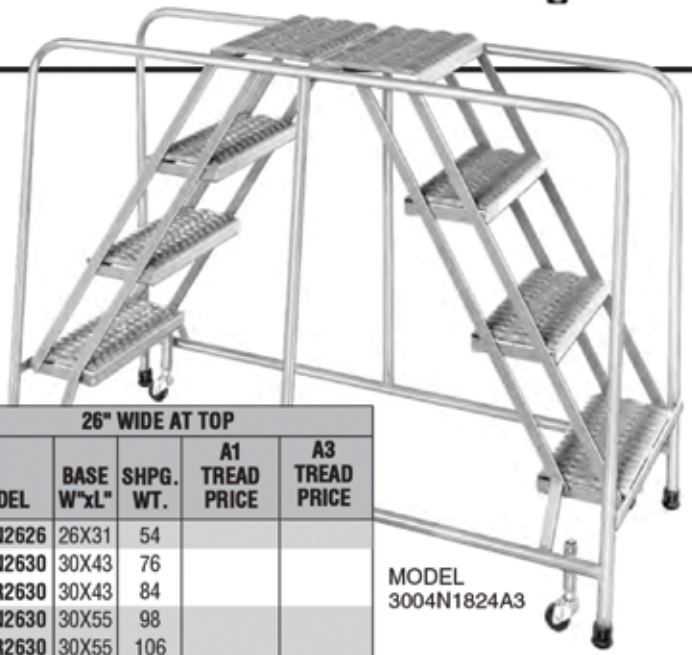

MODEL 3004N1824A3

CAL-OSHA models available

NO. STEPS INCL. PLAT.	PLAT. HT.	O.A. HT.	RAILS	18" WIDE AT TOP					26" WIDE AT TOP				
				MODEL	BASE W"xL"	SHPG. WT.	A1 TREAD PRICE	A3 TREAD PRICE	MODEL	BASE W"xL"	SHPG. WT.	A1 TREAD PRICE	A3 TREAD PRICE
2	20"	20"	GUIDE	3002N1818	18x31	44			3002N2626	26X31	54		
3	30"	30"	GUIDE	3003N1820	20x43	63			3003N2630	30X43	76		
3	30"	60"	HAND	3003R1820	20x43	72			3003R2630	30X43	84		
4	40"	40"	GUIDE	3004N1824	24x55	83			3004N2630	30X55	98		
4	40"	70"	HAND	3004R1824	24x55	90			3004R2630	30X55	106		
5	50"	80"	HAND	3005R1824	24x67	107			3005R2630	30X67	127		

Cotterman®

WARRANTY

All Cotterman products are guaranteed against defects in workmanship and materials for a period of one (1) year after shipment.

DISTRIBUTED BY:

COTTERMAN COMPANY IS PROUD TO BE A MEMBER OF THE FOLLOWING ASSOCIATIONS:

MEMBER ANSI

National Safety Council

MEMBER SCAFFOLD INDUSTRY ASSOCIATION SIA

MHIA The Material Handling Industry of America MEMBER COMPANY