



# METALTECH

# BuildMan<sup>™</sup> Grade

# SCAFFOLDING AND DRYWALL TRADES

**BIGGER  
CASTERS**

**HIGHER  
CAPACITIES**

**MORE  
STABILITY**

***"Our industrial-grade products are built to take more abuse and heavier loads than any others on the market."***

BuildMan<sup>™</sup> Grade products are built to endure the most rugged jobsite environments that the Pros deal with every day. Our industrial-grade products are built to take more abuse and heavier loads than any others on the market. They are more stable, stronger and safer to use. From truck to jobsite and from jobsite to jobsite, Pros can rely on BuildMan<sup>™</sup>, whether you are installing drywall, ceiling systems or performing maintenance on equipment or buildings. Metaltech's BuildMan<sup>™</sup> Grade products are Built Tough for Safety.

Distributed by:

— EST. 1975 —  
**INDUSTRIAL**  
LADDER & SUPPLY CO.

Toll-Free: 1-800-833-0800  
[WWW.INDUSTRIALLADDER.COM](http://WWW.INDUSTRIALLADDER.COM)



# 6' BUILDMAN™ DRYWALL BAKER SCAFFOLD



19/32 IN. (15 MM)  
ANTI-SLIP DECK



TIGHTENING HANDLE  
FOR MORE STABILITY



HEAVY DUTY  
6 IN. (15 CM) CASTERS



RUNG STEP



JOBSITE SERIES™  
COMPATIBLE

1½ IN.  
ROUND TUBE

1¾ IN.  
SQUARE TUBE

## TECHNICAL FEATURES / MODEL: I-BMSS

ASSEMBLED DIMENSIONS (WxDxH)	75¾ X 31 X 76 IN. (192.4 X 78.7 X 193 CM)
WEIGHT	165 LB (74.8 KG)
LOAD CAPACITY	1,500 LB (680 KG) COMBINED WEIGHT OF USER + MATERIALS.
WORKING HEIGHTS	FROM 29 TO 71.5 IN. (71.1 TO 181.6 CM). 2 IN. (5 CM) INCREMENT
REACH	12 FT (3.7 M). STACKABLE UP TO 2 UNITS HIGH FOR 18 FT (5.5 M) REACH
DECK (W x D)	19/32" (15 MM) PLYWOOD, SLIP-RESISTANT OF 29 X 67 IN. (73.7 X 170.2 CM)
BRACE	DOUBLE LOCKING STEM MECHANISMS WITH TIGHTENING KNOBS TO PREVENT LOOSENESS IN THE STRUCTURE.
OPTIONS	GUARDRAILS / SET OF 4 OUTRIGGERS
CASTERS	6 IN. (15 CM) DOUBLE LOCKING HEAVY DUTY.



OPTIONAL GUARDRAILS (I-BMSGR)  
AND OUTRIGGERS (I-BMSO4)



12'

REACH

1,500 lb

LOAD CAPACITY



ANTI-SLIP DECK



NON-MARKING

OSHA  
ANSI  
CSA

MEETS



STACKABLE:  
UP TO 2 UNITS  
WITH OPTIONAL  
OUTRIGGERS AND  
GUARDRAIL SYSTEM



### STACKABLE UP TO 12' (3.7 M)

Easily stackable up to two units high in order to reach a range of 18' (5.5 m).



### MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 31" (78.7 cm) wide, it can easily roll through doorways.



### QUICK AND EASY HEIGHT ADJUSTMENT

Platform height adjusts at 2" (5 cm) increments. Double prong spring-loaded locking mechanism. Deck braces allow movement over lower obstacles.

# 6' BUILDMAN™ PORTABLE SCAFFOLD



**ANTI-SLIP  
PLATFORMS**



**HEAVY DUTY  
5 IN. (13 CM) CASTERS**



**1 IN.  
ROUND TUBE**

**1 1/2 IN.  
ROUND TUBE**

## TECHNICAL FEATURES / MODEL: I-BM6S

ASSEMBLED DIMENSIONS (WxDxH)	59 1/4 X 30 X 74 IN. (150.5 X 76.2 X 188 CM)
WEIGHT	115 LB (52.3 KG)
LOAD CAPACITY	1,000 LB (454 KG) COMBINED WEIGHT OF USER + MATERIALS. LARGE PLATFORMS: MAX. 375 LB (170 KG) / SMALL PLATFORM: MAX. 250 LB (113 KG).
WORKING HEIGHTS	FROM 11.75 TO 71.75 IN. (29.9 TO 182.3 CM). 12 IN. (30.5 CM) INCREMENT.
REACH	12 FT (3.7 M). STACKABLE UP TO 2 UNITS HIGH FOR 18 FT (5.5 M) REACH.
PLATFORMS (WxDxH)	2 PLATFORMS OF 58 1/4 X 8 3/4 X 2 IN. (148 X 22.2 X 5.1 CM) 14 GAUGE STEEL. 1 PLATFORM OF 58 1/4 X 6 1/2 X 2 IN. (148 X 16.5 X 5.1 CM) 14 GAUGE STEEL.
OPTION	GUARDRAILS AND OUTRIGGERS COMPLETE SYSTEM (I-BM6SK).
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY.



**OPTIONAL GUARDRAILS  
AND OUTRIGGERS COMPLETE  
SYSTEM (I-BM6SK)**



**12'**

**REACH**

**1,000 lb**

**LOAD CAPACITY**



**ANTI-SLIP PLATFORMS**



**NON-MARKING**

**OSHA  
ANSI  
CSA**

**MEETS**

**2**

**STACKABLE:  
UP TO 2 UNITS  
WITH OPTIONAL  
OUTRIGGERS AND  
GUARDRAIL SYSTEM**



**TWO-MINUTE ASSEMBLY**  
No tools required.



**EASY STORAGE**  
Folds flat for compact storage and transport.



**TRANSPORT**  
Use it as a cart to haul your equipment and heavy loads to and from job sites. 1,000 lb (454 kg) capacity.



# 4' BUILDMAN™ PORTABLE SCAFFOLD



ANTI-SLIP  
PLATFORMS



FOLD AWAY  
TOOL SHELF



HEAVY DUTY  
5 IN. (13 CM) CASTERS



SAFETY RAIL



1 1/4 IN.  
ROUND TUBE

1 IN.  
ROUND TUBE

## TECHNICAL FEATURES / MODEL: I-BM4S

ASSEMBLED DIMENSIONS (WxDxH)	50 1/2 X 23 3/4 X 61 1/2 IN. (128.3 X 60.3 X 156.2 CM)
WEIGHT	69 LB (31.3 KG)
LOAD CAPACITY	750 LB (340 KG) COMBINED WEIGHT OF USER + MATERIALS. 450 LB (204 KG) PER PLATFORM.
WORKING HEIGHTS	10 - 21 1/2 - 33 IN. (25.4 - 54.61 - 83.82 CM)
REACH	9 FT (2.75 M)
PLATFORMS (WxDxH)	2 PLATFORMS OF 40 5/8 X 8 3/4 X 1 3/4 IN. (103.2 X 22.2 X 4.4 CM).
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY.

9'

REACH

750 lb

LOAD CAPACITY




ANTI-SLIP PLATFORMS



NON-MARKING

OSHA  
ANSI  
CSA

MEETS

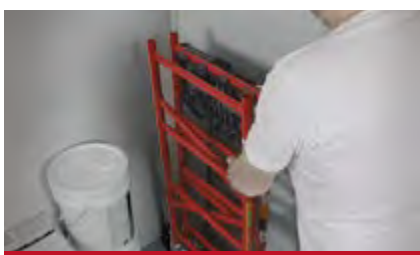


### EASY STORAGE

Folds flat for compact storage and transport



### TOOL SHELF & SAFETY RAIL

Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.

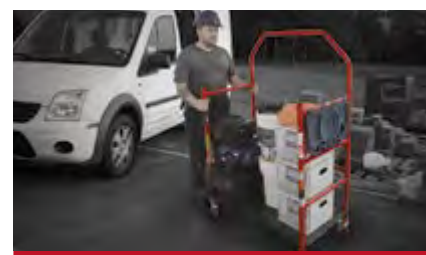

### TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 750 lb (340 kg) capacity.



# WALL HAULER™ SERIES 2000



**GYPSUM BOARDS  
OF 1/2 IN. (13 MM)**



**CHOICES OF 8 IN.  
HEAVY DUTY CASTERS**

**1 1/4 IN.  
ROUND TUBE**



## TECHNICAL FEATURES / MODEL: I-BMD2031R

LOAD CAPACITY	2,000 LB (907 KG)
GYPSUM BOARD QUANTITY	18 BOARDS OF 1/2 IN. (13 MM)
ASSEMBLY	PERMAQUICK CONNECT™
ASSEMBLED DIMENSIONS (WxDxH)	39 X 19 1/4 X 44 1/4 IN. (99 X 48.9 X 112.4 CM)
WEIGHT	76.3 LB (34.6 KG)
PLATFORM DIMENSIONS (WxDxH)	9 1/2 X 37 1/2 IN. (24.1 X 95.3 CM)
HANDLE BAR	1 1/4 IN. (3.2 CM) OUTSIDE DIAMETER, 16 GAUGE STEEL.
POWDER COATED FINISH	RED
CASTERS (SEE CASTERS SELECTION)	8 IN. (20 CM) POLYURETHANE HIGH CAPACITY CASTERS. INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE.

# 2,000 lb

**LOAD CAPACITY**




**PERMAQUICK  
CONNECT™**

**OSHA  
ANSI  
CSA**

**MEETS**

# 2

**YEARS WARRANTY**

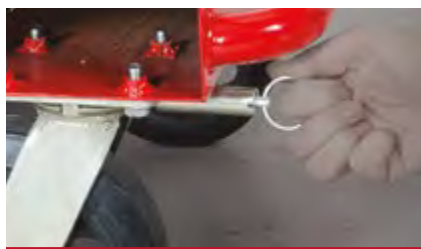

### HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



**AS TOUGH  
AS WELDED**

### PERMAQUICK CONNECT™

PermaQuick Connect™ handle system, once assembled, it is as strong as welded.



### MOVE IN A SMALL SPACE

This narrower model is made to move drywall sheets in a small space, turn your load on a dime!



# WALL HAULER™ SERIES



TECHNICAL FEATURES	SERIES 3600 REMOVABLE HANDLE	SERIES 3000 PERMAQUICK CONNECT™	SERIES 3000 FULLY WELDED FRAME	SERIES 2000 FULLY WELDED FRAME	SERIES 2000 PERMAQUICK CONNECT™
LOAD CAPACITY	3,600 LB (1,633 KG)	3,000 LB (1,361 KG)	3,000 LB (1,361 KG)	3,000 LB (1,361 KG)	2,000 LB (907 KG)
GYPSUM BOARD QUANTITY	22 BOARDS OF 1/2 IN. (13 MM)	24 BOARDS OF 1/2 IN. (13 MM)	22 BOARDS OF 1/2 IN. (13 MM)	20 BOARDS OF 1/2 IN. (13 MM)	18 BOARDS OF 1/2 IN. (13 MM)
ASSEMBLED DIMENSIONS (WxDxH)	44 1/4 X 22 X 47 1/4 IN. (112.4 X 55.9 X 120 CM)	43 1/2 X 24 X 48 3/4 IN. (110.5 X 61 X 123.8 CM)	49 1/4 X 22 1/4 X 48 3/8 IN. (125.1 X 56.5 X 97.2 CM)	38 X 20 X 44 3/8 IN. (96.5 X 50.8 X 87 CM)	39 X 19 1/4 X 44 1/4 IN. (99 X 48.9 X 112.4 CM)
WEIGHT	90 LB (40.8 KG)	107.8 LB (48.9 KG)	80 LB (36.3 KG)	71.5 LB (32.4 KG)	76.3 LB (34.6 KG)
PLATFORM DIMENSIONS (WxDxH)	11 1/2 X 44 1/4 IN. (29.2 X 112.4 CM)	12 X 42 IN. (30.5 X 106.7 CM)	11 1/2 X 42 IN. (29.2 X 106.7 CM)	10 1/2 X 38 PO (26.7 X 96.5 CM)	9 1/2 X 37 1/2 IN. (24.1 X 95.3 CM)
HANDLE BAR	1.65 IN. (4.2 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL	1 1/4 IN. (3.2 CM) OUTSIDE DIAMETER. 14 GAUGE STEEL	1 1/4 IN. (3.2 CM) OUTSIDE DIAMETER. 14 GAUGE STEEL	1 1/8 IN. (2.9 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL	1 1/4 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
OPTION	SLIDING COATING	SLIDING COATING	SLIDING COATING	SLIDING COATING STANDARD FEATURE	NONE
STANDARDS	ANSI, OSHA AND CSA				
CASTERS (BASE CASTERS IS POLYURETHANE. SEE CASTERS SELECTION FOR MORE CHOICES)	8 IN. (20 CM) HIGH CAPACITY CASTERS INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE				
POWDER COATED FINISH	RED	RED	YELLOW	YELLOW	RED
MODEL	I-BMD3631R	I-BMD3031R	I-BMD3131YGR	I-BMD2131YGR	I-BMD2031R

## CASTERS SELECTION



	POLYURETHANE	POLYURETHANE	PHENOLIC	KINGPINLESS POLYURETHANE	KINGPINLESS PHENOLIC
SERIES 3600 REMOVABLE HANDLE	I-BMD3631R	N/A	I-BMD3631P	I-BMD3631RK	I-BMD3631PK
SERIES 3000 PERMAQUICK CONNECT™	I-BMD3031R	N/A	I-BMD3031P	I-BMD3031RK	I-BMD3031PK
SERIES 3000 FULLY WELDED FRAME	N/A	I-BMD3131YGR	OPTIONAL		
SERIES 2000 FULLY WELDED FRAME	N/A	I-BMD2131YGR			
SERIES 2000 PERMAQUICK CONNECT™	I-BMD2031R	N/A	I-BMD2031P	I-BMD2031RK	I-BMD2031PK



**METALTECH SALES OFFICE**

1735 St-Elzear Blvd. West, Laval (Quebec) Canada H7L 3N6 | Toll-Free 1 800 363-7587 | customerservice@metaltech.co

**WWW.METALTECH.CO**

