

METALTECH[®]

METALTECH FULL LINE CATALOG

Distributed by:

— EST. 1975 —
INDUSTRIAL
LADDER & SUPPLY CO.

Toll-Free: 1-800-833-0800
WWW.INDUSTRIALLADDER.COM

FLORIDA | 8331 Epicenter Blvd. Lakeland, FL 33809

ILLINOIS | 245 East Adele Court Villa Park, Illinois 60181

GEORGIA | 4200 Steve Reynolds Blvd. #1 Norcross, GA 30093

MINNESOTA | 8437 University Ave. NE Spring Lake Park, MN 55432

MARYLAND | 10611 C Iron Bridge Rd Jessup, Maryland 20794

NEW JERSEY | 11 Purcell Court Moonachie, New Jersey 07074

OHIO | 4725 Port Union Rd. Hamilton, Ohio 45011

TEXAS | 10560 Newkirk Street Dallas, Texas 75220

CORPORATE | 4707 Enterprise Ave Naples, FL 34104

BETTER SELL THROUGH WITH **RETAIL READY** PACKAGING



Consumers and contractors can easily find all the visual information to compare products and make the best purchase decision for their needs, right on the box. Without having to open the packaging.



Convenient QR code on each box, customers can get up to date information on their mobile devices, instruction manuals and assembly videos.



Creative merchandising solutions for any format retailers.

JOBSITE SERIES™

CONTENTS

ALTHOUGH THE METALTECH PRODUCTS SHOWN IN THIS CATALOG ARE IN LINE WITH THE MARKET REQUIREMENTS FOR CANADA AND USA, METALTECH IS NOT RESPONSIBLE FOR ANY MODEL OR PRODUCT SPECIFICATIONS THAT MIGHT CHANGE THROUGHOUT THE YEAR. SOME PRODUCTS MAY NOT BE EXACTLY AS SHOWN IN THE PHOTOS. RESERVING OUR RIGHTS FOR PRINTER'S ERROR OR DISCONTINUED PRODUCTS.

DO NOT HESITATE TO CONSULT METALTECH CUSTOMER SERVICE FOR MORE INFORMATION OR ADVICE.

METALTECH
1735 St-Elzear Blvd. West
Laval (Quebec) Canada H7L 3N6

Toll Free Customer Service Number
1 800 363-7587













Customer Service Fax Number
1 866 517-7585

Customer Service Email
cs@metaltech.co



WE RESERVE THE RIGHT TO CHANGE OR MODIFY CONTENT, SPECIFICATIONS, FEATURES, PRODUCTS, OPTIONS, DIMENSIONS AND MATERIALS AT ANY TIME WITHOUT NOTICE OR OBLIGATION. ALL DIMENSIONS AND MEASUREMENTS ARE APPROXIMATE AND MAY VARY FROM ACTUAL PRODUCTS.

METALTECH IS A REGISTERED TRADEMARK OF METALTECH-OMEGA INC.

	EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®	
	STANDARD FRAMES	8-9
	WALK-THRU ARCH FRAMES	10
	LADDER ARCH FRAMES	11
	CROSS BRACES & ACCESSORIES	12-13
	GUARDRAILS, TOEBOARDS & TIE-OFF BARS	14
	BASES	15
	SIDE BRACKETS	16
	PLATFORMS	17
	STAIRWAYS, HOIST POSTS & PULLEY	18
	RACK, NETTING, TARP & WAGON	19
	LIGHT DUTY FRAMES & ACCESSORIES	20
	WALL BRACKETS, BEAMS & SHORING POSTS	
	WALL BRACKETS	21
	BEAMS	21
	POST DRIVER	21
	LIGHT DUTY SHORING POST	21
	MOBILE SCAFFOLDING - JOBSITE SERIES™	
	JOBSITE SERIES™ 6' BAKER	24-25
	JOBSITE SERIES™ PERRY STYLE™	26-27
	JOBSITE SERIES™ 6'	28-29
	JOBSITE SERIES™ 5'	30
	JOBSITE SERIES™ 4' DELUXE	31
	JOBSITE SERIES™ 4'	32
	4' HIGH PORTABLE SCAFFOLD	33
	MOBILE ALUMINUM SCAFFOLDING - ALU SERIES™	
	ALU SERIES™ 6' BAKER	34-35
	ALU SERIES™ 6'	36
	ALU SERIES™ 4'	37
	INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE	
	BUILDMAN™ 6' DRYWALL BAKER	40-41
	BUILDMAN™ 6'	42-43
	BUILDMAN™ 4'	44
	BUILDMAN™ WALL HAULER™ SERIES 3600 REMOVABLE HANDLE	45
	BUILDMAN™ WALL HAULER™ SERIES 3000 PERMAQUICK™	46
	BUILDMAN™ WALL HAULER™ SERIES 3000 WELDED	47
	BUILDMAN™ WALL HAULER™ SERIES 2000 RESIDENTIAL WELDED	48
	BUILDMAN™ WALL HAULER™ SERIES 2000 RESIDENTIAL PERMAQUICK™	49
	ALUMINUM SCAFFOLDING	
	ALUMINUM TOWER KITS	52-53
	ALUMINUM SCAFFOLDING	54-55
	EASY-SET SCAFFOLD TOWER™	
	EASY-SET SCAFFOLD TOWER™	56-57
	FIBERGLASS SERIES™ SCAFFOLDING	
	THE TOWER	60
	ACCESSORIES	61
	FIBERGLASS TOWER KITS	62
	SPEEDY™ SCAFFOLDING	63
	LADDERS, STEPLADDERS AND WORK PLATFORMS	
	12.5' TELESCOPIC LADDER	66
	15.5' TELESCOPIC LADDER	67
	TELESCOPING MULTI-POSITION LADDER	68
	TELESCOPING WORK PLANK AND LADDER JACK	69
	STEPLADDERS	70
	STEPLADDERS AND PORTABLE WORK PLATFORM	71
	TEMPORARY FENCES	
	CROWD & TRAFFIC CONTROL	74
	JOB SITES SECURITY	75
	FENCE ACCESSORIES	76-77
	SET UP AND SAFETY GUIDELINES	
	EXTERIOR SCAFFOLDING - VIEW	78-79
	EXTERIOR SCAFFOLDING - SET UP INSTRUCTIONS	80
	EXTERIOR SCAFFOLDING - SAFETY GUIDELINES	81
	REPLACEMENT PARTS	82-83
	INDEX (BY PRODUCT CODES)	84-85



EXTERIOR SCAFFOLDING COMPONENTS SAFERSTACK®

Metaltech's exterior scaffolding systems and accessories are built to help make your work easier and safer. Safety is key when working in heights. Quality control, testing procedures, precision of the welding process, correct installation are key when assembling a scaffold structure to minimize liability and worker risk of injury. Our SaferStack® design brings safety to another level by nesting each frame into one another when stacked for storage and transport by locking them one onto another. Our scaffolding systems meet or exceed OSHA, ANSI and CSA requirements.

- **SAFERSTACK®**
- **ANTI-SLIP POWDER-COAT FINISH**
- **OSHA, ANSI AND CSA**



EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

BUILT TOUGH FOR SAFETY

METALTECH®

LESS IS BEST




**STACKS IN 30%
LESS SPACE THAN
REGULAR FRAMES**

**FRAMES INTERLOCK
FOR SAFER STORAGE
AND TRANSPORT**

**SAFERSTACK®
HELPS PREVENT STACKED
FRAMES FROM SLIDING**

**TESTED TO MEET
ANSI, CSA AND
OSHA STANDARDS**

**100% COMPATIBLE
WITH ANY STANDARD
METALTECH® FRAME**




**WITH SAFERSTACK, STACK
100 FRAMES WHERE
YOU CURRENTLY STACK ONLY
70 STANDARD FRAMES**

SAFERSTACK®
A METALTECH INNOVATION


GO ONLINE TO SEE
THE INNOVATION
WWW.METALTECH.CO

CUSTOM MANUFACTURING

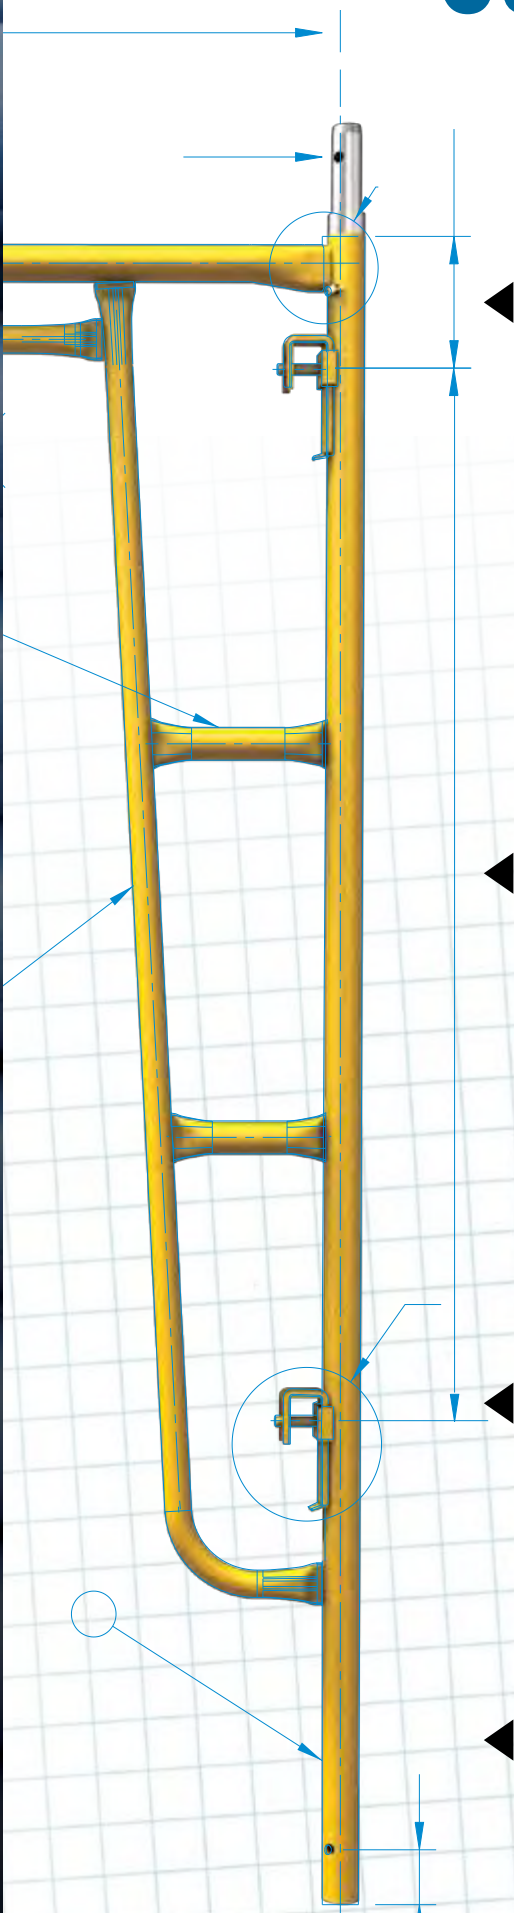


COUPLING PINS

Connect & secure your coupling pin to any scaffold frame legs with our choice of spring-lock, clevis or roll pins. Ask our customer service for more details.

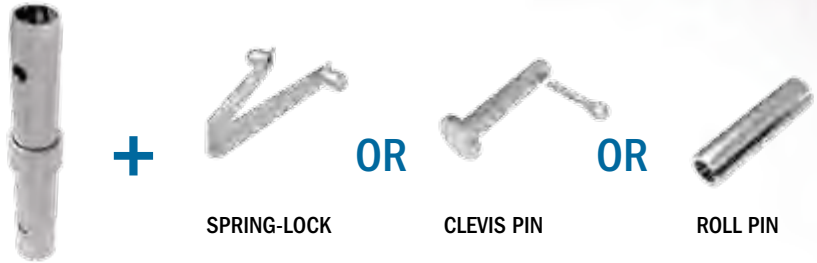

FRAME LOCKS*

Metaltech offers a wide range of frame locks to meet your needs. Order your choice through our customer service for either one of our Gravity-Lock, T-Lock, F-Lock, C-Lock, U-Lock, V-Lock or K-Lock locking systems.

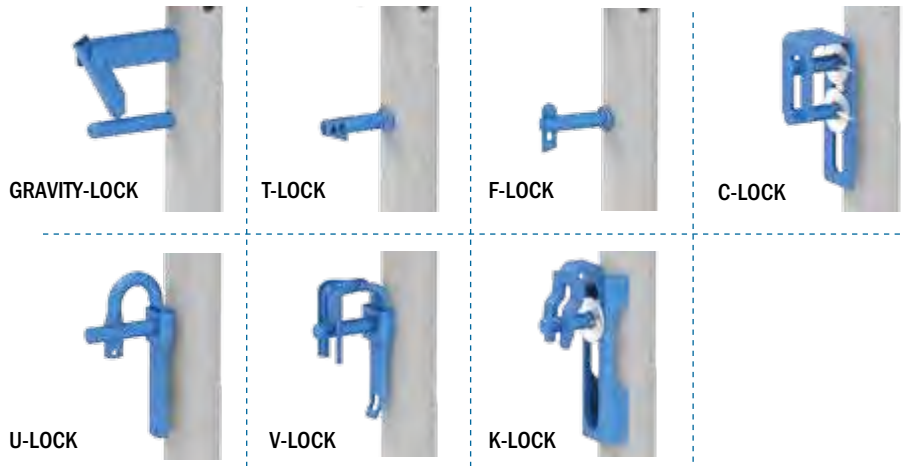

CUSTOM FRAMES*

With our 55 years of experience, supported by our manufacturing facility and engineering team, we can match your needs by developing custom frames. They can be compatible with brands such as Vanguard, Bill Jax, Waco and Safway, we fit them all. Contact our customer service for more information.†

† All trademarks and registered trademarks listed above are the property of their respective owners.

SPECIAL COLORS*

Customize your frames with your color choice. Please inquire with customer service for our competitive prices.

*Minimum order quantity applies

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®




BUILT TOUGH FOR SAFETY

METALTECH


STANDARD FRAMES

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

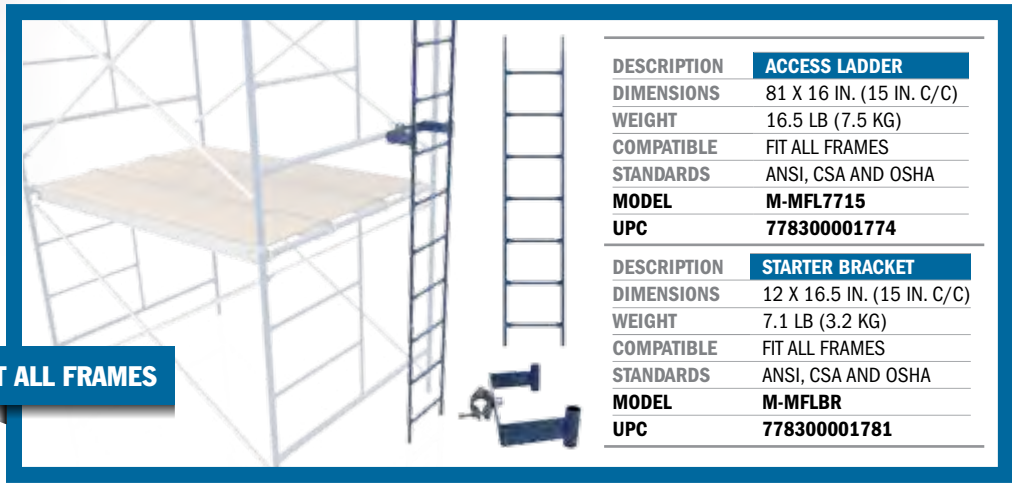


DESCRIPTION	ACCESS LADDER
DIMENSIONS	81 X 16 IN. (15 IN. C/C)
WEIGHT	16.5 LB (7.5 KG)
COMPATIBLE	FIT ALL FRAMES
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MFL7715
UPC	778300001774




DESCRIPTION	STARTER BRACKET
DIMENSIONS	12 X 16.5 IN. (15 IN. C/C)
WEIGHT	7.1 LB (3.2 KG)
COMPATIBLE	FIT ALL FRAMES
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MFLBR
UPC	778300001781

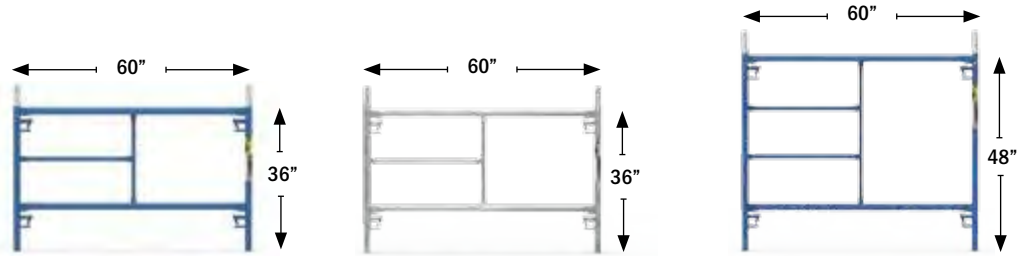




DIMENSIONS (H X W)	36" X 60"	36" X 60"	48" X 60"
LOCK SPACING	24 IN.	24 IN.	36 IN.
WEIGHT	31.8 LB	35.8 LB	36.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF3660PS	M-MF3660GVPS	M-MF4860PS
UPC	778300800353	778300801350	778300800452

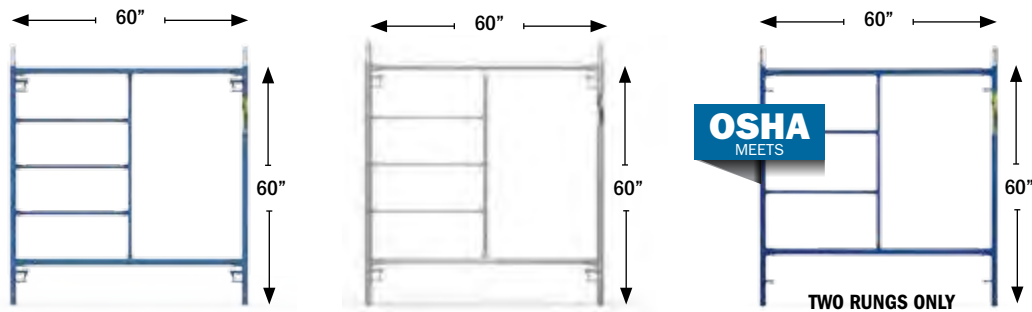

DIMENSIONS (H X W)	60" X 60"	60" X 60"	60" X 60"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	40.8 LB	43.8 LB	38 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.625 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED - AVAILABLE IN GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	T-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA
MODEL	M-MF6060PS	M-MF6060GVPS	M-MF6060PS-A
UPC	778300800551	778300801558	778300800575




DIMENSIONS (H X W)	72" X 60"	76" X 60"	60" X 48"
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	42.8 LB	45.8 LB	37.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	POWDER COATED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF7260PS	M-MF7660PS	M-MF6048PS
UPC	778300800650	778300807659	778300800544





* Not Saferstack

DIMENSIONS (H X W)	60" X 30"	60" X 30"	60" X 36"/60" (ADJUSTABLE FRAME)*
LOCK SPACING	48 IN.	48 IN.	48 IN.
WEIGHT	31.8 LB	31.8 LB	49.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE	OUTSIDE DIAMETER 1 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MF6030PS	M-MF6030GVPS	M-MF60EPS
UPC	778300800537	778300801534	778300805563






WALK-THRU ARCH FRAMES

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®






DIMENSIONS (H X W)	76" X 60"	76" X 60"
LOCK SPACING	48 IN.	48 IN.
WEIGHT	46.8 LB	48.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7660PS	M-MA7660GVPS
UPC	778300806454	778300816453



DIMENSIONS (H X W)	78" X 60"*	78" X 60"*	120" X 78"
LOCK SPACING	48 IN.	48 IN.	S.O.
WEIGHT	47.3 LB	49.3 LB	101 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7860PS	M-MA7860GVPS	M-MA12078GV
UPC	778300806652	778300816651	778300806102



* A set-up charge of \$250 is required for order less than 250 units.





Find other Stairways parts on page 18

DIMENSIONS (H X W)	76" X 42"	76" X 42"	121" X 60"
LOCK SPACING	48 PO	48 PO	N/A
WEIGHT	41.1 LB	41.4 LB	66.9 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7642PS	M-MA7642GVPS	M-MA12160DEGV
UPC	778300806409	778300806416	778300950195

LADDER ARCH FRAMES



DIMENSIONS (H X W)	76" X 60"	76" X 60"
LOCK SPACING	48 IN.	48 IN.
WEIGHT	52.8 LB	55.8 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7660LPS	M-MA7660LGVPS
UPC	778300806461	778300816460



DIMENSIONS (H X W)	78" X 60"*	78" X 60"*
LOCK SPACING	48 IN.	48 IN.
WEIGHT	53.5 LB	56.5 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE	OUTSIDE DIAMETER 1.25 IN. - 16 GAUGE
PERIMETER TUBES	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE	OUTSIDE DIAMETER 1.69 IN. - 13 GAUGE
FINISH	POWDER COATED	GALVANIZED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MA7860LPS	M-MA7860LGVPS
UPC	778300816477	778300816668


*A set-up charge of \$250 is required for order less than 250 units.

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



CROSS BRACES & ACCESSORIES

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

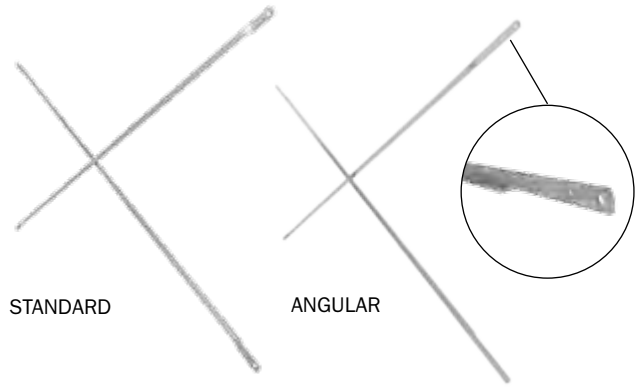

GALVANIZED DIAGONAL BRACE

DIMENSIONS	FRAME	WEIGHT	MODEL	UPC
7 FT SPAN	30 IN.	4.89 LB	M-MDB3084	778300930845
7 FT SPAN	60 IN.	5.65 LB	M-MDB6084	778300950706
10 FT SPAN	30 IN.	6.78 LB	M-MDB30120	778300930104
10 FT SPAN	60 IN.	7.10 LB	M-MDB60120	778300951000

STANDARDS: ANSI, CSA AND OSHA


GALVANIZED STANDARD CROSS BRACE

DIMENSIONS (H X W)	WEIGHT	MODEL	UPC
2 X 7 FT	9.7 LB	M-MC2484	778300820726
27.75 IN. X 7 FT	9.8 LB	M-MC27.7584	778300820757
3 X 7 FT	10.1 LB	M-MC3684	778300820733
4 X 7 FT	10.7 LB	M-MC4884	778300820740
2 X 8 FT	11 LB	M-MC2496	778300820825
3 X 8 FT	11.3 LB	M-MC3696	N/A
4 X 8 FT	11.9 LB	M-MC4896	778300820849
2 X 10 FT	13.5 LB	M-MC24120	778300821020
27.75 IN. X 10 FT	13.6 LB	M-MC27.75120	778300821051
3 X 10 FT	13.8 LB	M-MC36120	778300821037
4 X 10 FT	14.2 LB	M-MC48120	778300821044

GALVANIZED ANGULAR CROSS BRACE

3 OR 4 X 7 FT	13 LB	M-MC364884	N/A
3 OR 4 X 8 FT	15 LB	M-MC364896	N/A

STANDARDS: ANSI, CSA AND OSHA

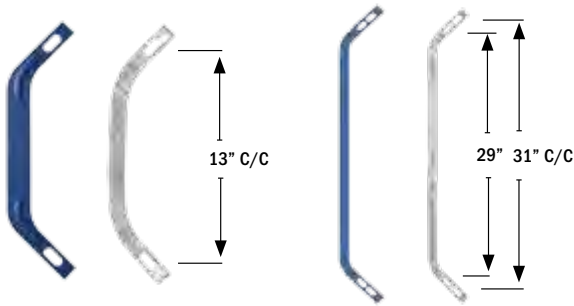

LOCK ARM

DIMENSIONS	FRAME	WEIGHT	MODEL	UPC
13 IN.	POWDER COATED	0.71 LB	M-MLA13	778300950157
13 IN.	GALVANIZED	0.9 LB	M-MLA13GV	778300951154
29-31 IN.	POWDER COATED	1.86 LB	M-MLA2931	778300952939
29-31 IN.	GALVANIZED	1.9 LB	M-MLA2931GV	778300952946

STANDARDS: ANSI, CSA AND OSHA


DESCRIPTION

EYE BOLT	3/8 X 2 1/2 IN.
DIMENSIONS	3/8 X 2 1/2 IN.
WEIGHT	0.11 LB
FINISH	GALVANIZED
MODEL	M-MTWAEYE
UPC	778300872107

WALL ATTACHMENT & PLATE

WALL ATTACHMENT & PLATE	4 FT TUBE (MTA)
DIMENSIONS	4 FT TUBE (MTA)
WEIGHT	7.6 LB
FINISH	GALVANIZED / ALUMINUM
MODEL	M-MTWAGVPL
UPC	778300872022

STANDARDS: ANSI, CSA AND OSHA

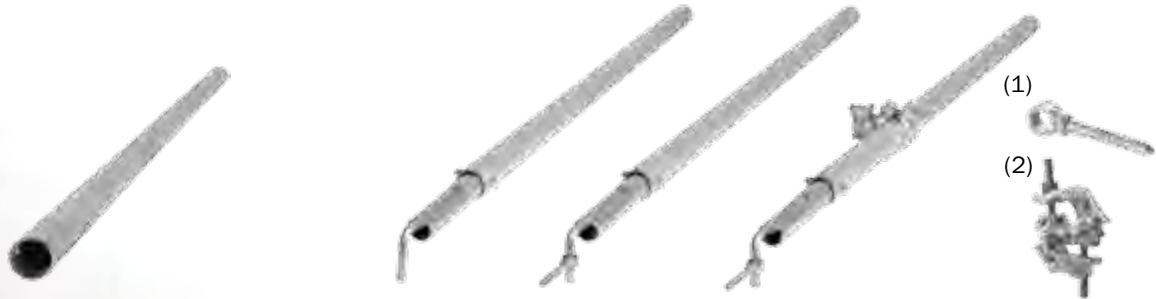

ALUMINUM TUBE



DIMENSIONS	WEIGHT	MODEL	UPC
10 FT SCHEDULE 40 (Ø 1.9 IN.)	9.4 LB	M-MTA120	778300871209
20 FT SCHEDULE 40 (Ø 1.9 IN.)	18.72 LB	M-MTA240	778300872404

STANDARDS: ANSI, CSA AND OSHA

WALL ATTACHMENT

4 FT TUBE	EYE BOLT ⁽¹⁾	CLAMP ⁽²⁾	WEIGHT	MODEL	UPC
✓	-	-	5.86 LB	M-MTWA	778300872008
✓	✓	-	6 LB	M-MTWAK	778300872015
✓	✓	✓	9.22 LB	M-MTWAFDUK	778300000913

STANDARDS: ANSI, CSA AND OSHA



DESCRIPTION	COUPLING PIN & SPRING-LOCK	COUPLING PIN	SPRING-LOCK	PIG TAIL
DIMENSIONS	1 3/8 IN. WITH 1 IN. COLLAR	1 IN. COLLAR	FOR HOLE Ø 1/2 IN.	1 1/2 X 3 IN.
WEIGHT	0.9 LB	0.86 LB	0.04 LB	0.1 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MLC1S	M-MLC1	M-MLS	M-MLG
UPC	778300882014	778300880348	778300882007	778300950300



DESCRIPTION	TOGGLE PIN	BOLT & NUT	WEDGE CLAMPS 90°	WEDGE CLAMPS 90°
DIMENSIONS	3,5 IN.	3/8 X 2 1/4 IN.	Ø 1.90 IN.	Ø 1.69 - 1.90 IN.
WEIGHT	0.13 LB	0.08 LB	3.3 LB	2.32 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MTOGGLE	M-MLB	M-MTCFW1	M-MTCFW2
UPC	S.O.	778300950393	778300862009	778300862016



DESCRIPTION	SWIVEL WEDGE CLAMPS	SWIVEL WEDGE CLAMPS	BOLTED 90° FIXED CLAMP	BOLTED SWIVEL CLAMP
DIMENSIONS	Ø 1.90 IN.	Ø 1.69 - 1.90 IN.	Ø 1.69 - 1.90 IN.	Ø 1.69 - 1.90 IN.
WEIGHT	3.7 LB	3.62 LB	3.25 LB	3.75 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MTCSW1	M-MTCSW2	M-MTCF DU	M-MTCS DU
UPC	778300862030	778300862047	778300862108	778300862115



GUARDRAILS, TOEBOARDS & TIE-OFF BARS

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



GUARDRAIL POST WITH WEDGE CLAMP

FINISH	WEIGHT	MODEL	UPC
POWDER COATED	10.8 LB	M-MGPUSL	778300950089
GALVANIZED	11.1 LB	M-MGPUSLGV	778300950096

STANDARDS: ANSI, CSA AND OSHA

GALVANIZED GUARDRAIL

DIMENSIONS	WEIGHT	MODEL	UPC
30 IN.	1.73 LB	M-MGR30	778300950065
48 IN.	2.71 LB	M-MGR4	778300950485
60 IN.	3 LB	M-MGR5	778300950058
84 IN.	4.36 LB	M-MGR7	778300950072
96 IN.	5.19 LB	M-MGR8	N/A
120 IN.	8.22 LB	M-MGR10	778300950102

STANDARDS: ANSI, CSA AND OSHA



ADJUSTABLE END-STOP GUARDRAIL

DESCRIPTION	ALL ARCH FRAMES
COMPATIBLE	ALL ARCH FRAMES
WEIGHT	10.6 LB
FINISH	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MGRMAEX
UPC	S.O.

ADJUSTABLE END-STOP GUARDRAIL

DESCRIPTION	ALL ARCH FRAMES
COMPATIBLE	ALL ARCH FRAMES
WEIGHT	10.8 LB
FINISH	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA
MODEL	M-MGRMAEXGV
UPC	S.O.



GALVANIZED TOEBOARD

DIMENSIONS	WEIGHT	MODEL	UPC
30 IN.	3.49 LB	M-MGT30	778300712304
60 IN.	6.47 LB	M-MGT60	778300712007
84 IN.	8.33 LB	M-MGT84	778300710690
120 IN.	12.20 LB	M-MGT120	778300712052

STANDARDS: ANSI, CSA AND OSHA

ALUMINUM TIE-OFF BAR

DIMENSIONS	WEIGHT	MODEL	UPC
7 FT	31.7 LB	M-BAA07	778300000364
8 FT	35.2 LB	M-BAA08	778300001354
10 FT	42.2 LB	M-BAA10	778300000371

BASES



6 X 6 IN. BASE PLATE				6 X 6 IN. SWIVEL BASE PLATE			
WEIGHT	FINISH	MODEL	UPC	WEIGHT	FINISH	MODEL	UPC
2 LB	POWDER COATED	M-MBBF	778300920273	2.92 LB	POWDER COATED	M-MBBS	778300920280
2.2 LB	GALVANIZED	M-MBBFGV	778300920297	4 LB	GALVANIZED	M-MBBSGV	778300920266

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



GALVANIZED LEVELING JACK WITH PLATE					GALVANIZED LEVELING JACK				
DIMENSIONS	WEIGHT	TUBE	MODEL	UPC	DIMENSIONS	WEIGHT	TUBE	MODEL	UPC
24 IN.	6 LB	HOLLOW	M-MBSJP24H	778300920112	24 IN.	7 LB	HOLLOW	M-MBSJS24H	778300920020
24 IN.	11 LB	SOLID	M-MBSJP24	778300920105	24 IN.	11 LB	SOLID	M-MBSJS24	778300920013
36 IN.	16 LB	SOLID	M-MBSJP36	778300920310	36 IN.	15 LB	SOLID	M-MBSJS36	778300920037

STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



GALVANIZED LEVELING JACK WITH SWIVEL BASE					OUTRIGGER				
DIMENSIONS	WEIGHT	TUBE	MODEL	UPC	DIMENSIONS	WEIGHT	FINISH	MODEL	UPC
24 IN.	7.32 LB	HOLLOW	M-MBSJPSW24H	778300000227	32 IN.	22 LB	POWDER COATED	M-M032	778300890101
24 IN.	13 LB	SOLID	M-MBSJPSW24	778300000210	32 IN.	22.3 LB	GALVANIZED	M-M032GV	778300890118


STANDARDS: ANSI, CSA AND OSHA

STANDARDS: ANSI, CSA AND OSHA



DESCRIPTION	LEVELING JACK WITH 8" U-HEAD	LEVELING JACK WITH 4" AND 8" FORK HEAD	GALVANIZED U-HEAD	DESCRIPTION	HEAVY-DUTY CASTER	CASTER
DIMENSIONS	24 IN.	24 IN.	4 IN.	LOAD CAPACITY	1,100 LB	750 LB
TUBE	SOLID	SOLID	N/A	DIMENSIONS	8 IN.	8 IN.
WEIGHT	16.67 LB	15.94 LB	5.18 LB	WEIGHT	10.65 LB	9.8 LB
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MBSJP8U24	M-MBSJPF24	M-MBB4UGV	MODEL	M-MBC8HD	M-MBC8
				UPC	778300930098	778300930081

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



SIDE BRACKETS



DESCRIPTION	ELEVATOR SIDE BRACKET	ELEVATOR SIDE BRACKET	DESCRIPTION	STORAGE BIN
CLOSED DIMENSIONS	39 X 26.75 X 12.75 IN.	39 X 36 X 12.75 IN.	DIMENSIONS	44.25 X 44.25 X 50.25 IN.
ADJUSTABLE	18.75 OR 23.75 IN.	27.75 OR 37.75 IN.	CAPACITY	10 BRACKETS
LOAD CAPACITY	500 LB	500 LB	COMPATIBLE	ELEVATOR SIDE BRACKET
WEIGHT	54.6 LB	57.2 LB	WEIGHT	201 LB
FINISH	ELECTROPLATING	ELECTROPLATING	FINISH	GALVANISED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	STANDARDS	N/A
MODEL	M-MSJ	M-MSJL	MODEL	M-MSJRACK
UPC	778300892440	778300892464	UPC	778300000388



DESCRIPTION	ANTI-THEFT SYSTEM	ANTI-THEFT SYSTEM WITH PADLOCK	END PLANK GUARDRAIL	END BRACKET*
DIMENSIONS	6.25 X 3.25 X 3.75 IN.	6.25 X 4 X 4 IN.	43.5 X 22 X 6 IN.	20 IN.
WEIGHT	2.56 LB	4.22 LB	16.5 LB	10 LB
FINISH	ELECTROPLATING	ELECTROPLATING	GALVANISED	POWDER COATED
COMPATIBLE	ELEVATOR SIDE BRACKET	ELEVATOR SIDE BRACKET	SCAFFOLD PLANK	N/A
STANDARDS	N/A	N/A	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MSJLOCK	M-MSJLOCKK	M-MSJGARDGV	M-ME20
UPC	N/A	N/A	N/A	778300892419

* Galvanized finish available on special order.



DESCRIPTION	SIDE BRACKET	SIDE BRACKET	SIDE BRACKET*	SIDE BRACKET*
DIMENSIONS	20 IN.	20 IN.	30 IN.	40 IN.
WEIGHT	9.16 LB	9.45 LB	12.44 LB	15.5 LB
FINISH	POWDER COATED	GALVANIZED	POWDER COATED	POWDER COATED
NORMES	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MS20	M-MS20GV	M-MS30	M-MS40
UPC	778300892402	778300892433	778300893003	778300894000

* Galvanized finish available on special order.

* Galvanized finish available on special order.

PLATFORMS



ALUMINUM PLATFORM WITH 5/8" PLYWOOD DECK

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	33.2 LB	M-MPP719	778300900077
7 FT X 24 IN.	75 LB/FT ²	45 LB	M-MPP724	778300900725
7 FT X 28 IN.	25 LB/FT ²	40 LB	M-MPP728	N/A
8 FT X 19 IN.	75 LB/FT ²	41.5 LB	M-MPP819	N/A
10 FT X 19 IN.	75 LB/FT ²	46 LB	M-MPP1019	778300900107
10 FT X 24 IN.	50 LB/FT ²	62 LB	M-MPP1024	778300900121

STANDARDS: ANSI, CSA AND OSHA

ALUMINUM PLATFORM WITH EDGE CAPPING

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	34.2 LB	M-MPP719RE	778300000579
10 FT X 19 IN.	75 LB/FT ²	47 LB	M-MPP1019RE	778300000562

STANDARDS: ANSI, CSA AND OSHA

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



ALUMINUM PLATFORM WITH 5/8" ANTI-SLIP PLYWOOD DECK

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	35 LB	M-MPP719AS	778300900015
7 FT X 24 IN.	75 LB/FT ²	38 LB	M-MPP724AS	778300900039
10 FT X 19 IN.	75 LB/FT ²	52 LB	M-MPP1019AS	778300900022
10 FT X 24 IN.	50 LB/FT ²	62 LB	M-MPP1024AS	778300900046

STANDARDS: ANSI, CSA AND OSHA



ALL ALUMINUM PLATFORM

DIMENSIONS	LOAD CAPACITY	WEIGHT	MODEL	UPC
7 FT X 19 IN.	75 LB/FT ²	27.5 LB	M-MPA719	778300901074
8 FT X 19 IN.	75 LB/FT ²	35 LB	M-MPA819	778300000906
10 FT X 19 IN.	75 LB/FT ²	42.46 LB	M-MPA1019	778300901104

STANDARDS: ANSI, CSA AND OSHA

FEATURES

✓ CROSSBEAM



- EVENLY SUPPORTS THE 5/8" THICK PLYWOOD AND PREVENTS IT FROM FLEXING
- GALVANIZED STEEL
- ERGONOMIC HANDLE CUT OUT FOR COMFORT AND EASY HANDLING

STANDARD ON PLYWOOD PLATFORMS MODELS OF 19 IN. WIDE.

✓ EDGE CAPPING



- PREVENTS EXTREMITY WEAR
- RE-INFORCES PLYWOOD DECK EXTREMITIES
- INCREASES THE PLYWOOD LIFESPAN
- CUSTOMIZE YOUR EDGE CAPPING WITH YOUR COMPANY NAME. (MINIMUM ORDER QUANTITY APPLIES)

ONLY AVAILABLE ON PLYWOOD PLATFORMS MODELS OF 19 IN. WIDE.

✓ SIDE RAILS



- PROTECTS THE PLYWOOD EDGES TO PREVENTS WATER INFILTRATION, DELAMINATION AND PREMATURE WEAR



GET THE METALTECH APP




STAIRWAYS, HOIST POSTS & PULLEY

INFO Find Starting Stairways Frames on page 10

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®



DESCRIPTION	STAIRWAY STARTING TUBE	STAIRWAY STARTING TUBE	STAIRWAY & HANDRAILS (INS. & OUT)	STAIRWAY GUARDRAIL
DIMENSIONS	60 IN.	60 IN.	84 X 60 IN.	33.5 X 20 IN.
WEIGHT	8.5 LB	8.8 LB	110 LB	1 LB
FINISH	POWDER COATED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MSTB	M-MSTBGV	M-MST760	M-MSTGR6060
UPC	N/A	N/A	778300961009	778300950188

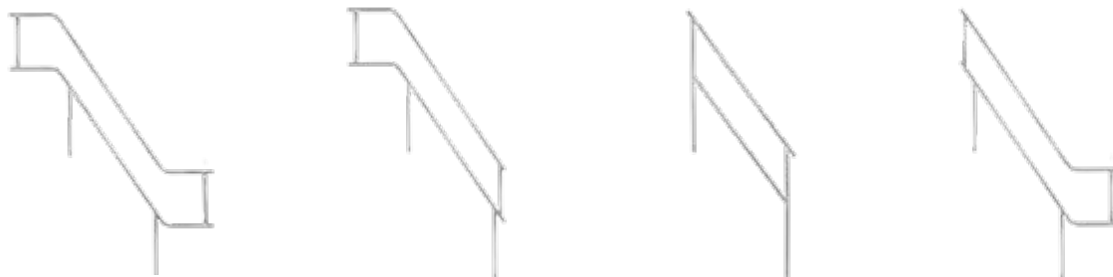

DESCRIPTION	OUTER HANDRAIL (7' X 60")	OUTER HANDRAIL (7' X 60")	INNER HANDRAIL (7' X 60")	INNER HANDRAIL (7' X 60")
DIMENSIONS	103.25 X 78 IN.	103.25 X 61 IN.	103.25 X 78 IN.	103.25 X 61 IN.
WEIGHT	19 LB	21 LB	11 LB	21 LB
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MST7600R	M-MST760RDE	M-MST760IR	M-MST760RFN
UPC	N/A	N/A	N/A	N/A



DESCRIPTION	GIN BLOCK PULLEY	HOIST POST	HOIST POST	HOIST POST & GIN BLOCK PULLEY KIT
LOAD CAPACITY	250 LB	250 LB	250 LB	250 LB
WEIGHT	14.4 LB	32.17 LB	43 LB	46.57 LB
FINISH	GALVANIZED	POWDER COATED	GALVANIZED	POWDER COATED
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MHP	M-MHA	M-MHAGV	M-MHAP
UPC	778300959204	778300959006	778300959105	778300959402

RACK, NETTING, TARP & WAGON



DESCRIPTION	SCAFFOLDING RACK	LIFTING SLING	DESCRIPTION	DEBRIS NETTING	DEBRIS NETTING
DIMENSIONS	63 X 47 X 9 IN.	48 X 5 X 9 IN.	DIMENSIONS	10 X 164 FT	10 X 164 FT
COMPATIBLE	60" WIDE FRAME	M-MFRACK	PACKAGE	66 X 11.5 IN.	66 X 11.5 IN.
CAPACITY	24 FRAMES	1,500 LB	COLOR	BLACK	GREEN
WEIGHT	140 LB	21 LB	WEIGHT	46.2 LB	46.2 LB
FINISH	GALVANIZED	ALUMINUM	MODEL	M-MDNET10BK	M-MDNET10GN
MODELS	M-MFRACKGV	M-MFRSLING	UPC	778300000623	778300000616




DESCRIPTION	SCAFFOLD TARP	BUNGEE TIES	SCREW CONNECTORS
DIMENSIONS	13 FT X 100 FT X 10 MIL	11 IN.	1.25 IN. DIAM.
PACKAGE	78 X 9 IN.	BAG OF 100	BAG OF 250
MATERIAL	FLAME RETARDANT	N/A	N/A
WEIGHT	69 LB / 250 GSM	N/A	N/A
MODEL	M-MTE13100	M-MBT11	M-MTESCREW
UPC	778300000586	778300000593	778300001347



DESCRIPTION	WAGON WITH 16" WHEELS	WAGON WITH 26" WHEELS	YELLOW FLATPROOF WHEEL	RECYCLED WHEEL *
DIMENSIONS	ADJUSTABLE 7 - 10 FT	ADJUSTABLE 7 - 10 FT	16 IN.	26 IN.
LOAD CAPACITY	1,800 LB	1,800 LB	450 LB	450 LB
WEIGHT	184 LB	312 LB	7 LB	39 LB
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-MW71016	M-MW71026	M-MWC16FP	M-MWC26
UPC	778300940301	778300940400	778300940318	778300940417

* The measurement can vary. For information purposes only.

EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®




GET THE METALTECH APP



LIGHT DUTY FRAMES & ACCESSORIES


EXTERIOR SCAFFOLDING COMPONENTS - SAFERSTACK®

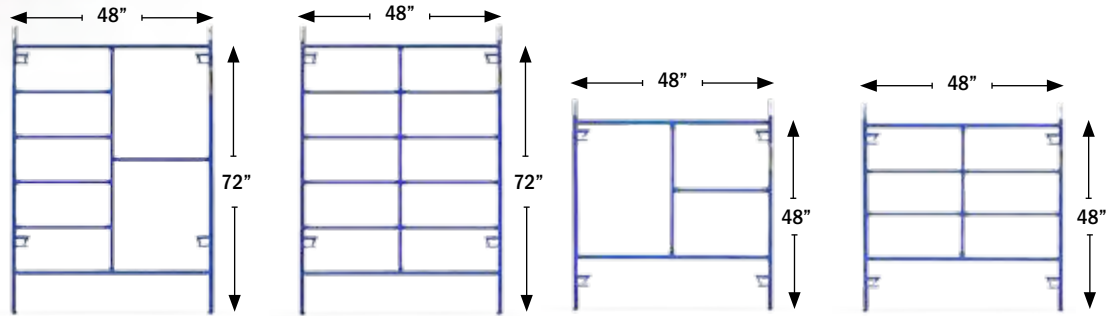

DIMENSIONS (H X W)	72" X 48"	72" X 48"	48" X 48"	48" X 48"
LOCK SPACING	48 IN.	48 IN.	36 IN.	36 IN.
WEIGHT	29.8 LB	37.1 LB	21.8 LB	26.5 LB
INTERIOR TUBES	OUTSIDE DIAMETER 1 IN.	OUTSIDE DIAMETER 1 IN.	OUTSIDE DIAMETER 1 IN.	OUTSIDE DIAMETER 1 IN.
PERIMETER TUBES	OUTSIDE DIAMETER 1.25 IN.	OUTSIDE DIAMETER 1.25 IN.	OUTSIDE DIAMETER 1.25 IN.	OUTSIDE DIAMETER 1.25 IN.
FINISH	POWDER COATED	POWDER COATED	POWDER COATED	POWDER COATED
COUPLING PIN	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK	SPRING-LOCK
FRAME LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK	GRAVITY-LOCK
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LD7248-4MPS	LD-LD7248DS-4M	LD-LD4848PS	LD-LD4848DS
UPC	778300814473	N/A	778300814442	N/A



DESCRIPTION	LOCK ARM	GUARDRAIL POST WITH HALF CLAMP	CASTER (WITH 1" STEM)	GALVANIZED LEVELING JACK
DIMENSIONS	24 IN.	56.5 IN.	5 IN.	24 IN.
WEIGHT	1.5 LB	11 LB	3 LB	1 LB
COMPATIBLE	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LDLA24	LD-LDGPCL	I-I1CAS5P	LD-LDBJP24
UPC	778300880249	N/A	778300211555	778300920129

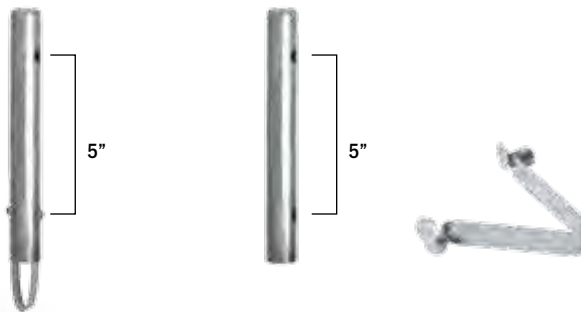


DESCRIPTION	COUPLING PIN & SPRING-LOCK	COUPLING PIN	SPRING-LOCK
DIMENSIONS	9.5 IN.	8 IN.	N/A
WEIGHT	0.48 LB	0.43 LB	0.05 LB
COMPATIBLE	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY	LIGHT FRAMES ONLY
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	LD-LDCLS	LD-LDCL	LD-LDLS
UPC	778300001545	778300881345	778300883004

INFO

Our light frames have different dimensions than the other categories of frames and they come with their own assembly components. The lock arms, leveling jacks, casters, coupling pins and spring locks are specifically designed to be used with the light frames only.


WALL BRACKETS, BEAMS & SHORING POSTS

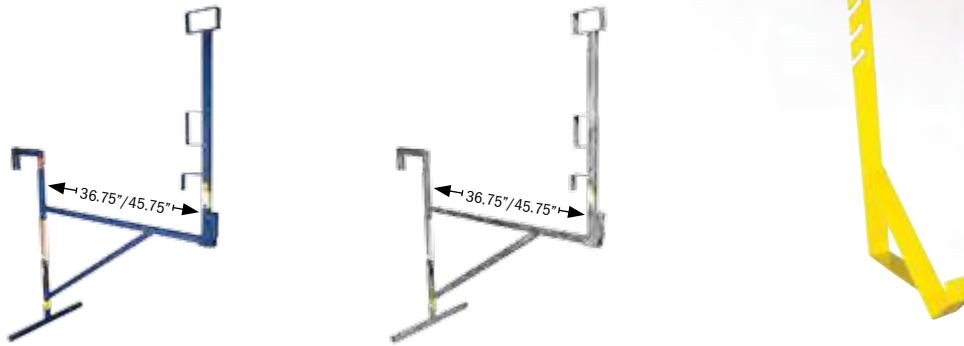

DESCRIPTION	WALL BRACKET	WALL BRACKET	ROOF BRACKET (FIXED)
DIMENSIONS	50.25 X 79 X 27.5 IN.	50.25 X 79 X 27.5 IN.	9.25 X 1.5 X 18.25 IN.
LOAD CAPACITY	1,000 LB	1,000 LB	290 LB
ADJUSTABLE	36.75 OR 45.75 IN.	36.75 OR 45.75 IN.	N/A
WEIGHT	67 LB	71 LB	2.5 LB
FINISH	POWDER COATED	GALVANIZED	POWDER COATED
STANDARDS	OSHA, ANSI, CWB AND CSA	OSHA, ANSI, CWB AND CSA	ANSI, CSA AND OSHA
MODEL	M-MWB42	M-MWB42GV	M-MRBF
UPC	778300940516	778300940523	778300890057



DESCRIPTION	POST DRIVER
FINISH	POWDER COATED
WEIGHT	17.6 LB
MODEL	C-MART
UPC	778300976270

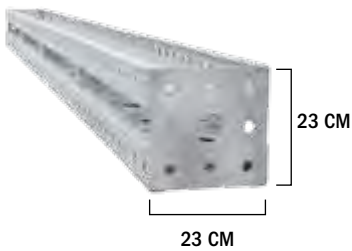

TUFSTUD™ (GALVANIZED STEEL)*			
DIMENSIONS	WEIGHT	MODEL	
360 X 23 CM (12 FT X 9 IN.)	162 LB	M-TUFSTUD144	
180 X 23 CM (6 FT X 9 IN.)	94 LB	M-TUFSTUD72	
90 X 23 CM (3 FT X 9 IN.)	55 LB	M-TUFSTUD36	
45 X 23 CM (1.5 FT X 9 IN.)	36 LB	M-TUFSTUD18	
FASTBOLT FOR TUFSTUD™			
0.75 X 1.5 IN.	N/A	M-FASTBOLT1.5	
0.75 X 2 IN.	N/A	M-FASTBOLT2	

*Imperial unit for approximate reference




ALUMINUM BEAM			
DIMENSIONS	WEIGHT	MODEL	
4 FT X 6.5 IN.	15 LB	M-PA4B	
5 FT X 6.5 IN.	19 LB	M-PA5B	
6 FT X 6.5 IN.	23 LB	M-PA6B	
8 FT X 6.5 IN.	30 LB	M-PA8B	
10 FT X 6.5 IN.	38 LB	M-PA10B	
12 FT X 6.5 IN.	45 LB	M-PA12B	
14 FT X 6.5 IN.	53 LB	M-PA14B	
16 FT X 6.5 IN.	60 LB	M-PA16B	
18 FT X 6.5 IN.	68 LB	M-PA18B	
20 FT X 6.5 IN.	73 LB	M-PA20B	
21 FT X 6.5 IN.	79 LB	M-PA21B	
24 FT X 6.5 IN.	90 LB	M-PA24B	
28 FT X 6.5 IN.	105 LB	M-PA28B	
32 FT X 6.5 IN.	122 LB	M-PA32B	



GALVANIZED LIGHT DUTY SHORING POST*			
DIMENSIONS	WEIGHT	MODEL	UPC
3'6" TO 6'	28 LB	M-SHOREPOST0	778300976317
5'6" TO 10'	30 LB	M-SHOREPOST1	778300976324
6'6" TO 11'	32 LB	M-SHOREPOST2	778300976331
8'6" TO 13'	40 LB	M-SHOREPOST3	778300976348
10'6" TO 15'6"	44 LB	M-SHOREPOST4	778300976355

* The measurements and weights may differ. Contact us to get the latest capacity chart.

WALL BRACKETS, BEAMS & SHORING POSTS



MOBILE SCAFFOLDING JOBSITE SERIES™

Discover Metaltech's fresh, new product and packaging design with our innovative mobile scaffold work platform offering. Innovative safety rail, foldaway tool shelf, locking mechanisms are only a few of the features included in this category. These quick and easy to assemble work platforms offer consumers and contractors affordability, safety and ease of use, all in easy to merchandise packages.

- **SAFETY RAILS**
- **FOLDAWAY TOOL SHELF**
- **GREAT PACKAGING**



MOBILE SCAFFOLDING - JOBSITE SERIES™

BUILT TOUGH FOR SAFETY

METALTECH®

JOBSITE SERIES™ 6' BAKER

MOBILE SCAFFOLDING - JOBSITE SERIES™



Model: I-CISC

INFO



COMPATIBLE:
BILJAX, BUFFALO,
WERNER, UST AND
BUILDMAN 6'
DRYWALL BAKER*

1,000 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	74.75 X 29.75 X 75 IN. (189.9 X 75.6 X 190.5 CM)
PACKAGE DIMENSIONS (WXDXH)	75 X 30.5 X 5.25 IN. (190.5 X 77.5 X 13.3 CM)
WEIGHT	127 LB (57.6 KG)
LOAD CAPACITY	1,000 LB (454 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 27 TO 73 IN. (68.6 TO 185 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
PLATFORM	1/2 IN. (12 MM) PLYWOOD THICK WITH PROTECTIVE STEEL EDGE BANDING
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 82
STANDARDS	ANSI, CSA AND OSHA
MODELS	I-CISC
UPC	778300200108

INFO



MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 29.75" (75.6 cm) wide, it can easily roll through doorways.



QUICK AND EASY HEIGHT ADJUSTMENT

Platform height adjusts at 2" (5 cm) increments from 27" to 73" (68.6 to 185 cm). Double prong spring-loaded locking mechanism. Deck braces allow movement over lower obstacles.

ALSO AVAILABLE WITH TRAP DOOR




Model: I-CISCTP

PLATFORM	PLATFORM WITH TRAP DOOR 1/2 IN. (12 MM) PLYWOOD THICK WITH PROTECTIVE STEEL EDGE BANDING
WEIGHT	132.3 LB (60 KG)
MODELS	I-CISCTP
UPC	778300200122

* All trademarks and registered trademarks listed above are the property of their respective owners.

STANDARDS: **ANSI OSHA CSA**

OPTIONS



SCAFFLOCK

DESCRIPTION	GUARDRAILS SYSTEM	39" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)	73.75 X 29 X 42.5 IN. (187.3 X 73.7 X 108 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (W X D X H)	46 X 31.25 X 4.5 IN. (116.8 X 79.4 X 11.4 CM)	83.5 X 30.75 X 3.75 IN. (212.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	59 LB (26.8 KG)	60.2 LB (27.3 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CAISC, I-CISCTP AND I-BMSS	I-CISC, I-CISCTP AND I-BMSS	I-CISC, I-CISCTP AND I-CISCPY	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS
MODEL	I-CISGRJP	I-ISEX4PPNCAS	I-CISTR	I-ISL
UPC	778300001316	778300200405	778300000463	778300001552



FOR 2 UNITS HIGH




FOR 3 UNITS HIGH




DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	19.25 X 4.5 X 24 IN. (48.7 X 11 X 61 CM)	52.75 X 3.75 X 52.25 IN. (134 X 9.5 X 132.7 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	54.5 X 50.25 X 4.25 IN. (138.4 X 127.6 X 10.8 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	33 LB (15 KG)	110 LB (49.9 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS	I-CISC, I-CISCTP AND I-CAISC	I-CISC, I-CISCTP, I-CAISC AND I-CISCPY
MODEL	I-IBBF4	I-IBSJP12H4	I-CIS04	I-CIS04TT
UPC	778300001699	778300001644	778300613151	778300613120

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

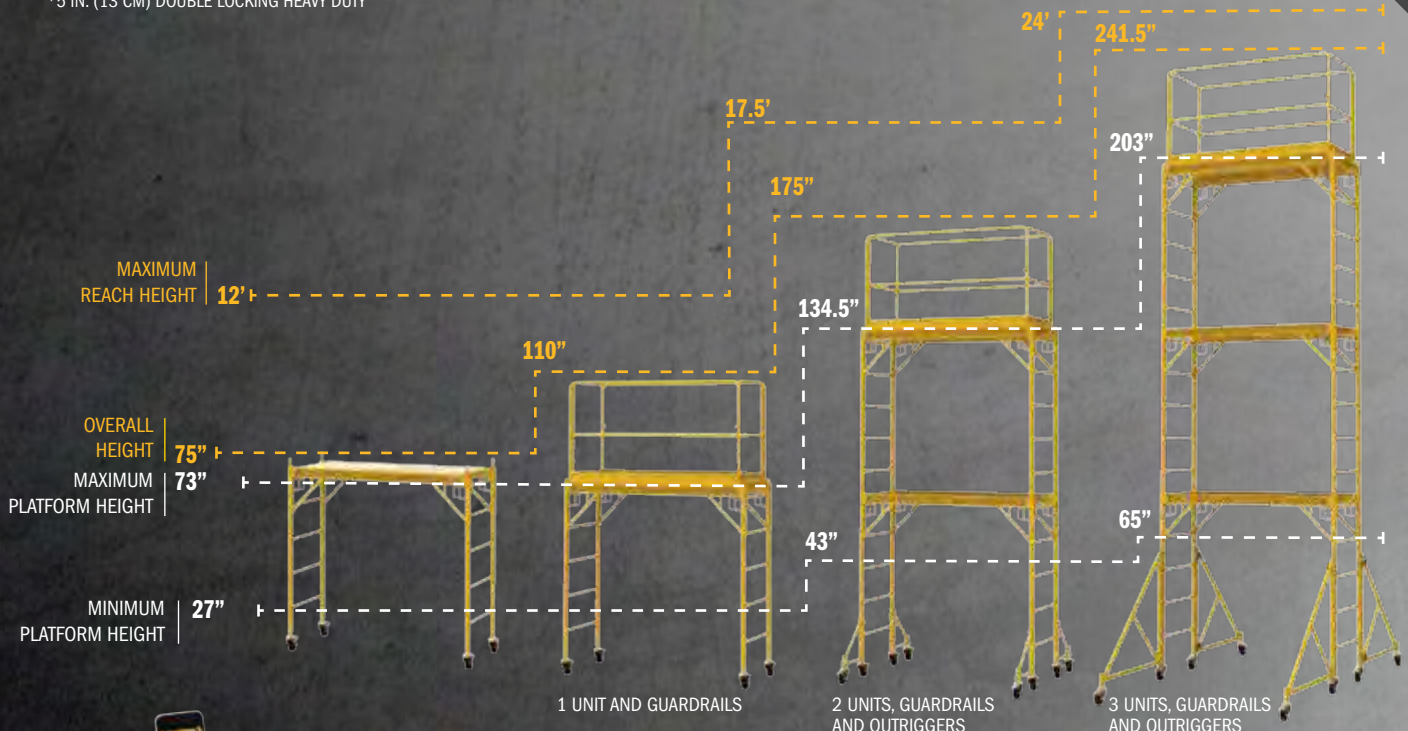

MOBILE SCAFFOLDING - JOBSITE SERIES™



JOBSITE SERIES™ PERRY STYLE™

MOBILE SCAFFOLDING - JOBSITE SERIES™



INFO



COMPATIBLE:
NU-WAVE
PERRY 660*

1,250 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	73.75 X 29.25 X 78.75 IN. (187.3 X 74.3 X 200 CM)
PACKAGE DIMENSIONS (WXDXH)	75.25 X 30 X 5.25 IN. (191.2 X 76.2 X 13.3 CM)
WEIGHT	147.4 LB (66.9 KG)
COMPATIBLE WITH	NU-WAVE PERRY MODEL 660*
LOAD CAPACITY	1,250 LB (567 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 27 TO 75.75 IN. (68.6 TO 192.4 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	POWDER COATED
PLATFORM	5/8 IN. (1.6 CM) PLYWOOD THICK WITH PROTECTIVE STEEL EDGE BANDING. ANTI-SLIP
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 82
STANDARDS	ANSI AND OSHA
MODEL	I-CISCPY
UPC	778300200115

INFO



PERRY STYLE COMPATIBLE
All components are 100% fully compatible with Nu-Wave Perry Model 660*.



ANTI-SLIP DECK
5/8" (16 mm) plywood, slip-resistant.




MULTI PURPOSE
Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 29.25" (74.3 cm) wide, it can easily roll through doorways.

OPTIONS



SCAFFLOCK

DESCRIPTION	GUARDRAILS SYSTEM	40" HIGH EXTENSION	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	70 X 33.5 X 48.5 IN. (177.8 X 83.8 X 121.9 CM)	73.75 X 30.5 X 43.5 IN. (187.3 X 77.5 X 110.5 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (W X D X H)	72.25 X 7.25 X 50.5 PO (182.9 X 17.8 X 127 CM)	83.5 X 30.75 X 3.75 IN. (211.1 X 78.1 X 9.5 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	89 LB (40.4 KG)	63 LB (28.5 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISC, I-CISCTP AND I-CISCPY	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS
MODEL	I-CISCPYGR	I-EX4PPNCASPY	I-CISTR	I-ISL
UPC	778300610037	778300000357	778300000463	778300001552



FOR 2 UNITS HIGH




FOR 3 UNITS HIGH



DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SET OF 14" OUTRIGGERS	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	19.25 X 4.5 X 24 IN. (48.7 X 11 X 61 CM)	52.75 X 3.75 X 52.25 IN. (134 X 9.5 X 132.7 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	24 X 16.5 X 5 IN. (61 X 41.9 X 12.7 CM)	54.5 X 50.25 X 4.25 IN. (138.4 X 127.6 X 10.8 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	45 LB (20.4 KG)	110 LB (49.9 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS**, 12 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS**, 12 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS	I-CISCPY & NU-WAVE / PERRY MODEL 660*	I-CISC, I-CISCTP, I-CAISC AND I-CISCPY
MODEL	I-IBBF4	I-IBSJP12H4	I-CIS04PY	I-CIS04TT
UPC	778300001699	778300001644	778300613137	778300613120

**5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

DESCRIPTION	SET OF FOUR 6" HEAVY DUTY CASTERS
COMPATIBLE WITH	I-CISCPY
WEIGHT	21.2 LB (9.6 KG)
MODEL	I-C4CAS5PYHD
UPC	778300001668

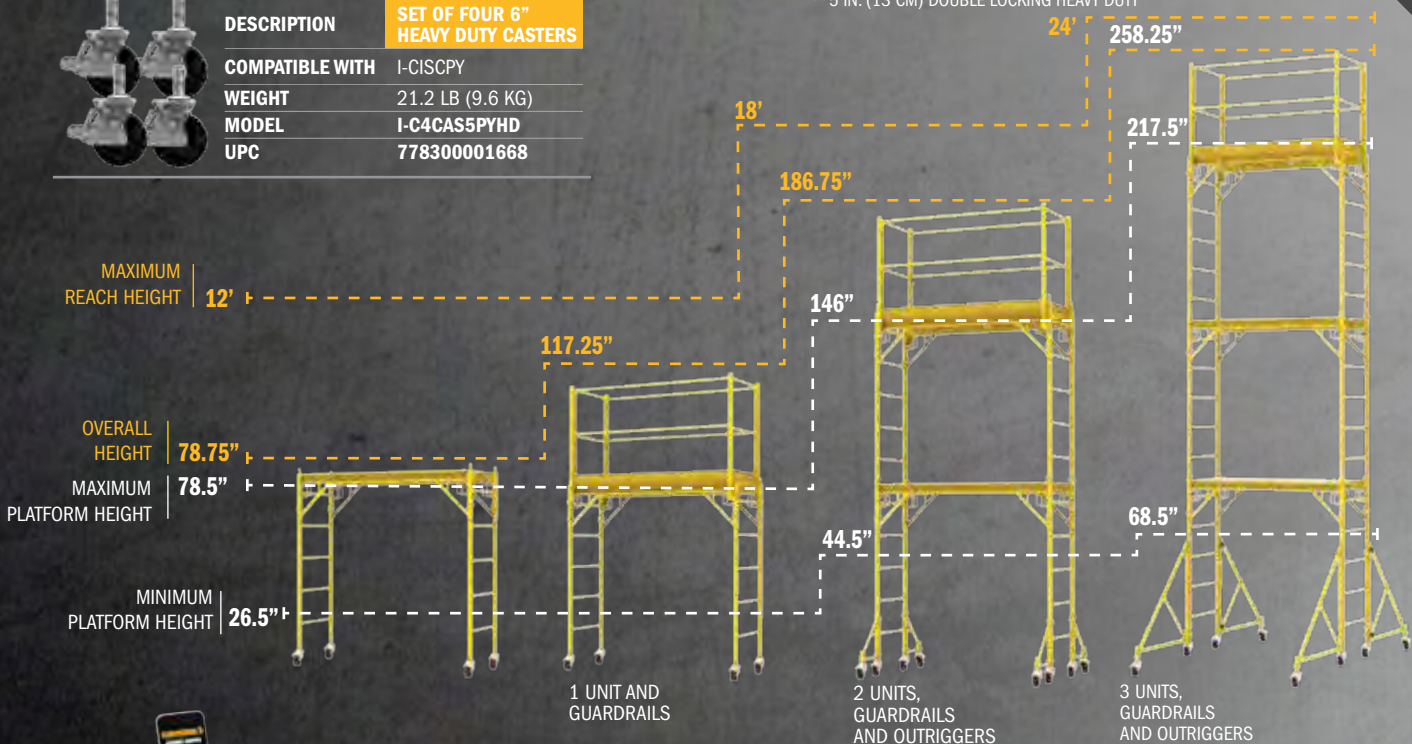

MOBILE SCAFFOLDING - JOBSITE SERIES™

JOBSITE SERIES™ 6'

MOBILE SCAFFOLDING - JOBSITE SERIES™



850 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WXDXH)	75 X 30.5 X 78.25 IN. (190.5 X 77.5 X 198.8 CM)
PACKAGE DIMENSIONS (WXDXH)	76.75 X 31 X 6.75 IN. (195 X 78.7 X 17.2 CM)
WEIGHT	151 LB (68.5 KG)
LOAD CAPACITY	850 LB (385 KG) Combined weight of user + materials. 300 lb (136 kg) per platform
WORKING HEIGHTS	13 - 25 - 37 - 49 - 61 - 73 IN. (33 - 63.5 - 94 - 124.5 - 155 - 185.5 CM)
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORMS	3 ANTI-SLIP. 14 GAUGE STEEL.
STRUCTURE	1.5 IN. (3.8 CM) ROUND TUBE. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 82
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IRC
UPC	778300400157


INFO




STACKABLE UP TO 12' (3.7 M)
Easily stackable up to two units high in order to reach a range of 18' (5.5 m).




EASY STORAGE
Folds flat for compact storage and transport

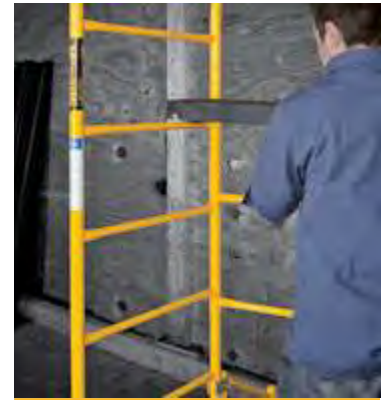

TWO-MINUTE ASSEMBLY
No tools required.



DESCRIPTION	SET OF 4 OUTRIGGERS WITH CASTERS	GUARDRAILS SYSTEM	36" HIGH EXTENSION	72" HIGH EXTENSION
ASSEMBLED DIMENSIONS (W X D X H)	25 X 3.5 X 23 IN. (63.5 X 8.9 X 58.4 CM)	70.5 X 30.5 X 44.25 IN. (179.1 X 77.5 X 112.4 CM)	75 X 30.5 X 36 IN. (190.5 X 77.5 X 91.4 CM)	75 X 30.5 X 71.5 IN. (190.5 X 77.5 X 181.6 CM)
PACKAGE DIMENSIONS (W X D X H)	27 X 26.25 X 4.5 IN. (66.6 X 66.8 X 11.4 CM)	N/A	76.75 X 31 X 6.75 IN. (195 X 78.7 X 17.2 CM)	76.75 X 31 X 6.5 IN. (195 X 78.7 X 17.2 CM)
WEIGHT	39.76 LB (18 KG)	50 LB (22.7 KG)	114 LB (51.7 KG)	127 LB (57.6 KG)
STRUCTURE	N/A	1 IN. (2.5 CM). 16 GAUGE	1.5 IN. (3.8 CM). 16 GAUGE	1.5 IN. (3.8 CM). 16 GAUGE
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY	—	—	—
INCLUDED IN THE BOX	4 OUTRIGGERS, 4 CASTERS	2 GUARDRAILS, 4 CHAINS, 4 ADAPTERS	3 ANTI-SLIP PLATFORMS 1 SCAFFOLDING STRUCTURE	3 ANTI-SLIP PLATFORMS 1 SCAFFOLDING STRUCTURE
COMPATIBLE WITH	I-IRC	I-IRC	I-IRC	I-IRC
MODEL	I-IR04	I-IRGR	I-IREX3	I-IREX6
UPC	778300411153	778300410101	778300412938	778300412952

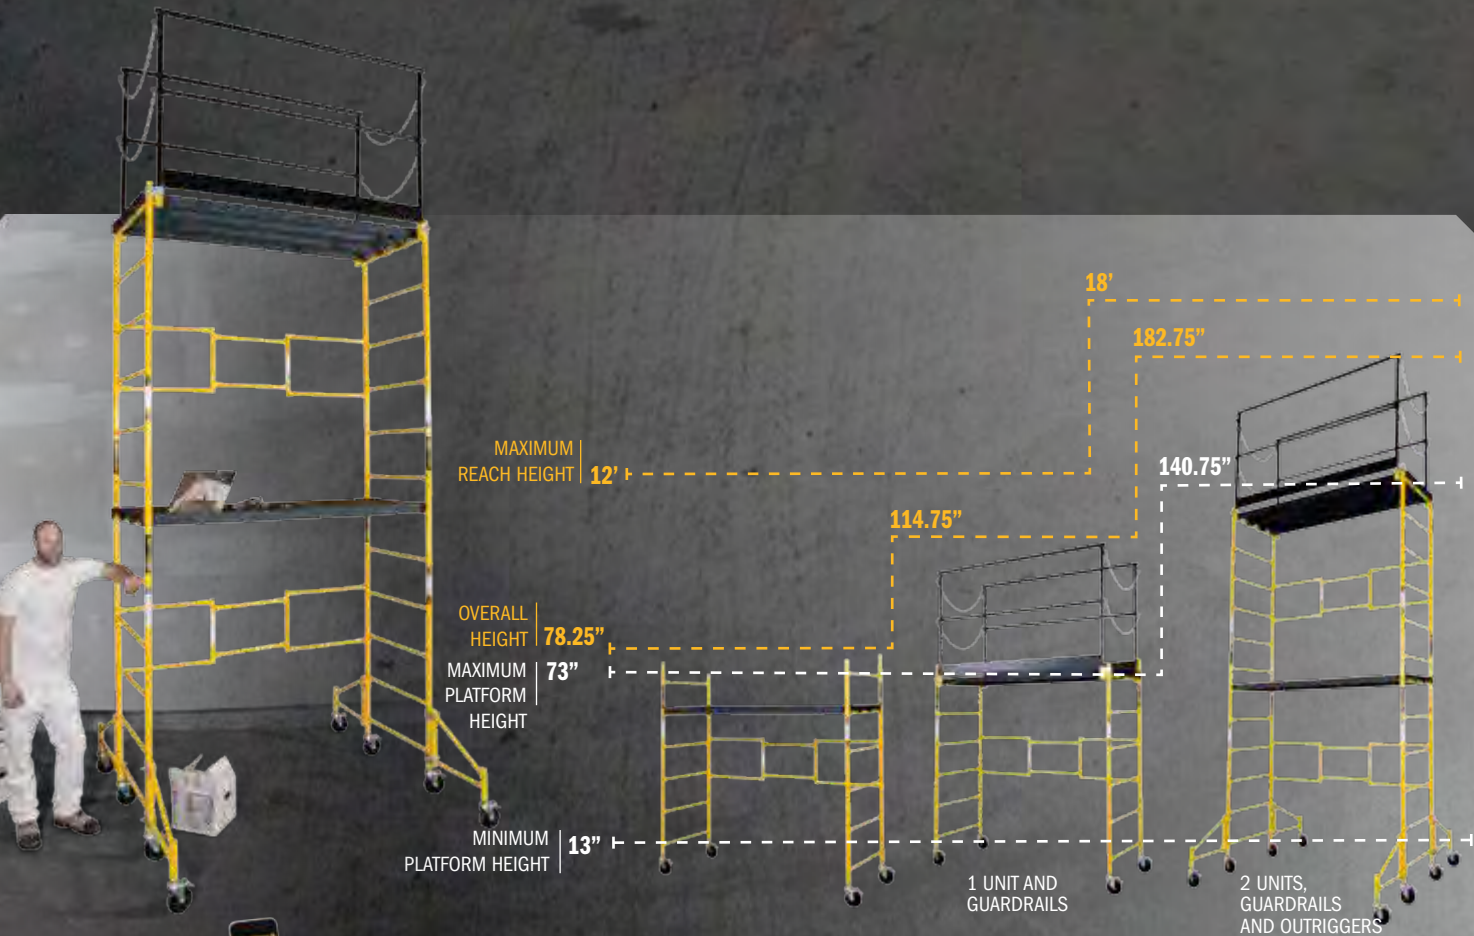

MOBILE SCAFFOLDING - JOBSITE SERIES™



GET THE METALTECH APP



JOBSITE SERIES™ 5'

MOBILE SCAFFOLDING - JOBSITE SERIES™

FOLD AWAY TOOL SHELF



10'
REACH

900 lb
LOAD CAPACITY



ASSEMBLED DIMENSIONS (W X D X H)	50.5 X 31 X 76.5 IN. (128.3 X 78.7 X 194.3 CM)
PACKAGE DIMENSIONS (W X D X H)	44 X 23 X 7.5 IN. (111.8 X 58.4 X 19.1 CM)
WEIGHT	77 LB (35 KG)
LOAD CAPACITY	900 LB (408 KG) Combined weight of user + materials. 450 lb (204 kg) per platform
WORKING HEIGHTS	11.5 - 25 - 36.5 - 48 IN. (29 - 64 - 93 - 122 CM)
REACH	10 FT (3 M)
FINISH	POWDER COATED
PLATFORM	2 ANTI-SLIP AND 1 STEP BAR. 14 GAUGE STEEL.
STRUCTURE	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 82
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMIS
UPC	778300100019

INFO



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 900 lb (408 kg) capacity.



TOOL SHELF & SAFETY RAIL

Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

JOBSITE SERIES™ 4' DELUXE



FOLD AWAY TOOL SHELF



9'
REACH

500 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	49.5 X 22.5 X 57.75 IN. (125.7 X 57.2 X 146.7 CM)
PACKAGE DIMENSIONS (W X D X H)	43.25 X 24 X 4.5 IN. (109.9 X 61 X 11.4 CM)
WEIGHT	65 LB (29.5 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP AND 1 STEP BAR. 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 82
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCNDX
UPC	778300100392

MOBILE SCAFFOLDING - JOBSITE SERIES™

INFO



TOOL SHELF & SAFETY RAIL
Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



RUNNING BOARD
Easy access to decks.



UTILITY HOOKS
Great to hang extensions and hoses.



GET THE METALTECH APP



JOBSITE SERIES™ 4'

MOBILE SCAFFOLDING - JOBSITE SERIES™

FOLD AWAY TOOL SHELF



500lb
LOAD CAPACITY

9'
REACH



ASSEMBLED DIMENSIONS (WXDXH)	49.5 X 22.5 X 57.75 IN. (125.7 X 57.2 X 146.7 CM)
PACKAGE DIMENSIONS (WXDXH)	43.25 X 24 X 4.5 IN. (109.9 X 61 X 11.4 CM)
WEIGHT	59 LB (26.8 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORM	2 ANTI-SLIP. 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 82
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCNT
UPC	778300100224

INFO



TOOL SHELF & SAFETY RAIL

Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 500 lb (227 kg) capacity.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

4' HIGH PORTABLE SCAFFOLD



9'
REACH

500 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (WXDXH)	41 X 22.5 X 45.75 IN. (104.1 X 57.2 X 116.2 CM)
PACKAGE DIMENSIONS (WXDXH)	43.25 X 24 X 3.75 IN. (109.7 X 60.8 X 9.8 CM)
WEIGHT	50 LB (22.7 KG)
LOAD CAPACITY	500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP 14 GAUGE STEEL.
STRUCTURE	1 IN. (2.5 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 82
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMCN
UPC	778300100200

MOBILE SCAFFOLDING

INFO



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. 500 lb (227 kg) capacity.



WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace



EASY STORAGE

Folds flat for compact storage and transport



GET THE METALTECH APP



ALU SERIES™ 6' BAKER

MOBILE ALUMINUM SCAFFOLDING - ALU SERIES™



700 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WDXH)	74 X 30.75 X 74.5 IN. (187.7 X 78.2 X 189.5 CM)
PACKAGE DIMENSIONS (WDXH)	74.75 X 30.25 X 6.25 IN. (189.7 X 76.9 X 16 CM)
WEIGHT	85 LB (38.6 KG)
LOAD CAPACITY	700 LB (318 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 26.75 TO 73 IN. (67.9 TO 185.1 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 3 units high for 24 ft (7.4 m) reach
FINISH	ANODIZED ALUMINUM
PLATFORM	ANTI-SLIP AIRCRAFT GRADE ALUMINUM ALLOY 6063
STRUCTURE	1.5 IN. (3.8 CM) SQUARE TUBE. AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 83
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-CAISC
UPC	778300220106

INFO



STACKABLE UP TO 12' (3.7 M)
Easily stackable up to two units high in order to reach a range of 18' (5.5 m).




MULTI PURPOSE
Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 30.75" (78.2 cm) wide, it can easily roll through doorways.



QUICK AND EASY HEIGHT ADJUSTMENT
Platform height adjusts at 2" (5 cm) increments from 26.75 to 73 in. (67.9 to 185.1 cm). Double prong spring-loaded locking mechanism. Deck braces allow movement over lower obstacles.




DESCRIPTION	GUARDRAILS SYSTEM	TOOL SHELF	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	69.5 X 30 X 41.5 IN. (176.5 X 76.2 X 105.4 CM)	30.25 X 20 X 2.75 IN. (76.8 X 50.8 X 6.7 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (W X D X H)	71 X 45 X 4 IN. (180.3 X 114.3 X 10.2 CM)	31.25 X 20.75 X 9.25 IN. (79.4 X 52.7 X 23.5 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	13 LB (5.9 KG)	5.5 LB (2.5 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	1 TOOL SHELF	2 SAFETY BRAKES
COMPATIBLE WITH	I-CAISC, I-CISC, I-CISCTP AND I-BMSS	I-CISC, I-CISCTP AND I-CISCPY	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS
MODEL	I-CAISCGR	I-CISTR	I-ISL
UPC	778300620012	778300000463	778300001552

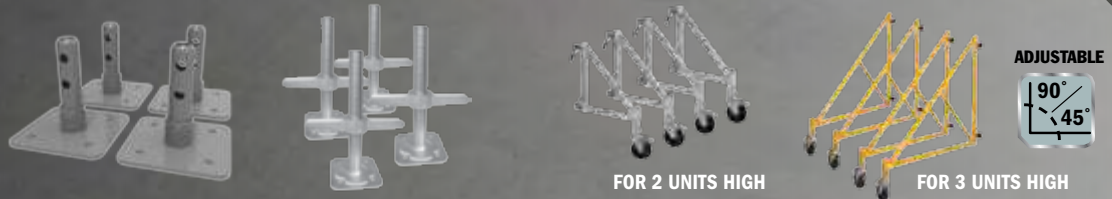


DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	FOR 2 UNITS HIGH	SET OF 46" OUTRIGGERS
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	24 X 4.5 X 27.25 IN. (61 X 11.4 X 69.2 CM)	52.75 X 3.75 X 52.25 IN. (134 X 9.5 X 132.7 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	27 X 27 X 4 IN. (68.9 X 68.9 X 10.2 CM)	54.5 X 50.25 X 4.25 IN. (138.4 X 127.6 X 10.8 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	32 LB (14.5 KG)	110 LB (49.9 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	4 OUTRIGGERS, 4 CASTERS*, 4 LOCKING PINS	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS	I-CAISC	I-CISC, I-CISCTP, I-CAISC AND I-CISCPY
MODEL	I-IBBF4	I-IBSJP12H4	I-CAIS04	I-CIS04TT
UPC	778300001699	778300001644	778300620166	778300613120

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY

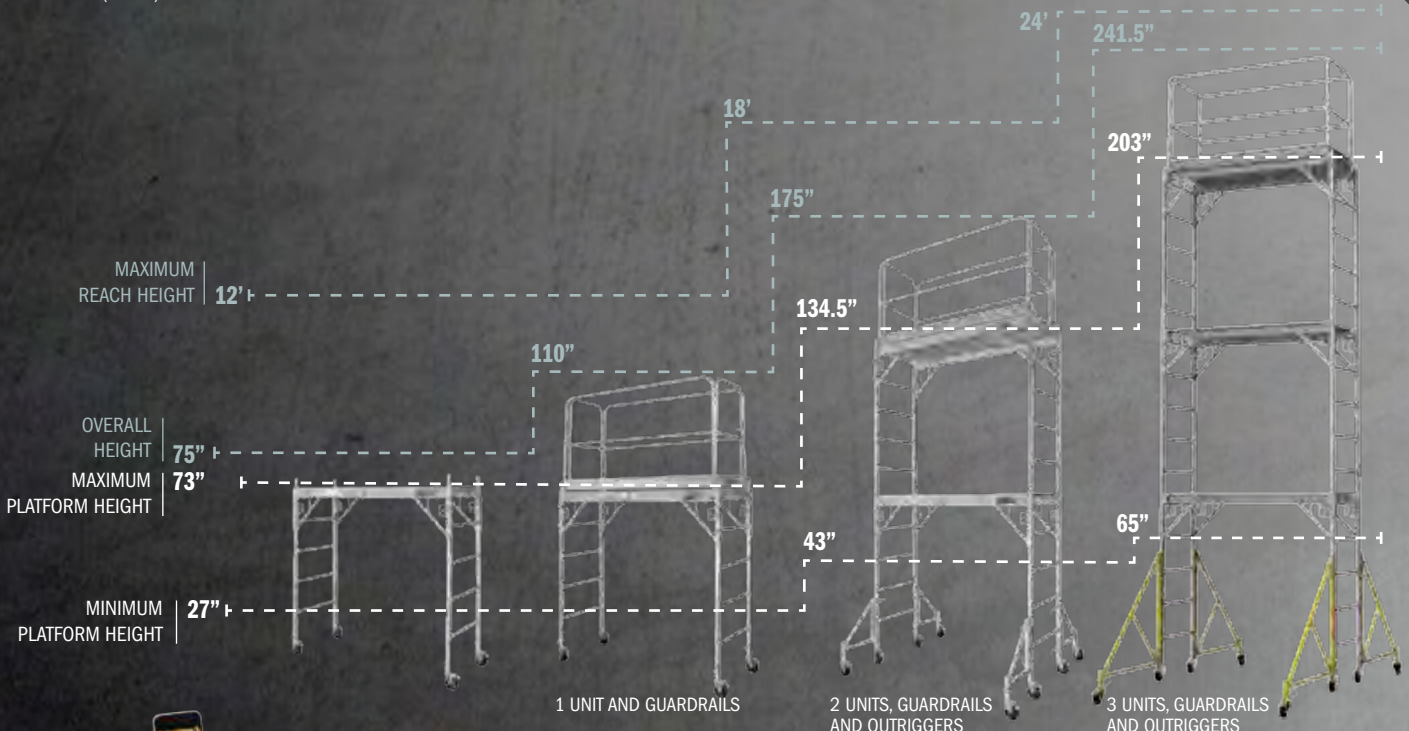

MOBILE SCAFFOLDING - ALU SERIES™



ALU SERIES™ 6'

MOBILE ALUMINUM SCAFFOLDING - ALU SERIES™



700 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WDXH)	56.5 X 29 X 72 IN. (143.5 X 73.7 X 182.9 CM)
PACKAGE DIMENSIONS (WDXH)	67.5 X 30.5 X 6.5 IN. (171.5 X 77.5 X 16.5 CM)
WEIGHT	67 LB (30.4 KG)
LOAD CAPACITY	700 LB (318 KG). Combined weight of user + materials
WORKING HEIGHTS	11.75 - 23.5 - 35.25 - 47 - 59 - 70.75 IN. (30 - 60 - 90 - 119 - 150 - 180 CM)
REACH	12 FT (3.7 M)
FINISH	ANODIZED ALUMINUM
PLATFORMS	3 ANTI-SLIP AIRCRAFT GRADE ALUMINUM ALLOY 6063
STRUCTURE	1.5 IN. (3.8 CM) OUTSIDE DIAMETER. AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 83
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-CAIRC
UPC	778300420155

INFO



LIGHTWEIGHT
This aluminum scaffolding offers all the benefits of our steel models, but is lighter and corrosion resistant.



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. 700 lb (318 KG) capacity.



EASY STORAGE
Folds flat for compact storage and transport

ALU SERIES™ 4'



9'
REACH

600 lb
LOAD CAPACITY

MOBILE ALUMINUM SCAFFOLDING - ALU SERIES™

ASSEMBLED DIMENSIONS (W X D X H)	42.25 X 22.25 X 47.75 IN. (107.3 X 56.5 X 121.4 CM)
PACKAGE DIMENSIONS (W X D X H)	43.75 X 22.5 X 4.75 IN. (111 X 57.2 X 12.1 CM)
WEIGHT	35.2 LB (16 KG)
LOAD CAPACITY	600 LB (272 KG). Combined weight of user + materials
WORKING HEIGHTS	9.5 - 21.25 - 33 IN. (24 - 54 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	ANODIZED ALUMINUM
PLATFORMS	2 ANTI-SLIP, 14 GAUGE STEEL
STRUCTURE	1.2 IN. (3.05 CM) OUTSIDE DIAMETER. AIRCRAFT GRADE ALUMINUM ALLOY 6063
CASTERS	4 IN. (10 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 83
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-IMAC
UPC	778300100408



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. 600 lb (272 KG) capacity.



LIGHTWEIGHT
This aluminum scaffolding offers all the benefits of our steel models, but is lighter and corrosion resistant.



EASY STORAGE
Folds flat for compact storage and transport

INFO



GET THE METALTECH APP

BUILT TOUGH FOR
SAFETY

METALTECH

INDUSTRIAL AND DRYWALL BUILDMAN™ GRADE

BuildMan™ Grade Scaffold work platforms and panel carts boast higher capacities and more stability than other brands on the market. With larger and higher capacity casters, bigger and thicker steel components and more features, BuildMan™ grade is the choice for professional and industrial users that require more stability, ease of use and larger casters to easily roll over obstacles.

- **HEAVY DUTY**
- **HIGHER CAPACITY**
- **BIGGER CASTERS**



INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE

**BUILT TOUGH FOR
SAFETY**


METALTECH®

BUILDMAN™ 6' DRYWALL BAKER™

INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE



INFO



COMPATIBLE:
BILJAX, BUFFALO,
WERNER, UST
AND METALTECH
BAKER*

1,500 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (W X D X H)	75.75 X 31 X 76 IN. (192.4 X 78.7 X 193 CM)
PACKAGE DIMENSIONS (W X D X H)	76.75 X 31.75 X 7 IN. (195 X 80.7 X 17.8 CM)
WEIGHT	165 LB (74.8 KG)
LOAD CAPACITY	1,500 LB (680 KG). Combined weight of user + materials
WORKING HEIGHTS	FROM 29 TO 71.5 IN. (73.7 TO 181.6 CM). 2 in. (5 cm) increment adjustable heights
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORM	19/32 IN. (15 MM). MM PLYWOOD, SLIP-RESISTANT
STRUCTURE	1.75 IN. (4.5 CM) SQUARE TUBE. 16 GAUGE STEEL
OPTIONS	GUARDRAILS SYSTEM / SET OF 4 OUTRIGGERS WITH CASTERS
CASTERS	6 IN. (15 CM) DOUBLE LOCKING HEAVY DUTY
REPLACEMENT PARTS	SEE PAGE 73
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BMSS
UPC	778300100057

INFO



STACKABLE UP TO 12' (3.7 M)
Easily stackable up to two units high in order to reach a range of 18' (5.5 m).



MULTI PURPOSE
Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways. At 31" (78.7 cm) wide, it can easily roll through doorways.



QUICK AND EASY HEIGHT ADJUSTMENT
Platform height adjusts at 2" (5 cm) increments from 28" to 71.5" (71.1 to 181.6 cm). Double prong spring-loaded locking mechanism. Deck braces allow movement over lower obstacles.

* All trademarks and registered trademarks listed above are the property of their respective owners.

OPTIONS




DESCRIPTION	SET OF 4 OUTRIGGERS WITH CASTERS	GUARDRAILS SYSTEM	39" HIGH EXTENSION
ASSEMBLED DIMENSIONS (W X D X H)	21.5 X 4 X 26.5 IN. (54.6 X 10.2 X 67.3 CM)	69.5 X 30 X 41.5 IN. (176.5 X 76.2 X 105.4 CM)	74.25 X 30.75 X 39.75 IN. (188.6 X 78.1 X 101 CM)
PACKAGE DIMENSIONS (W X D X H)	24 X 16.75 X 9.25 IN. (61 X 42.5 X 23.5 CM)	71.25 X 41.5 X 3.75 IN. (181 X 105.4 X 9.5 CM)	78 X 34.25 X 4.5 IN. (198.1 X 87 X 11.4 CM)
WEIGHT	52 LB (23.6 KG)	60 LB (27.2 KG)	88.8 LB (40.3 KG)
INCLUDED IN THE BOX	4 OUTRIGGERS, 4 CASTERS*, 12 LOCKING PINS	2 GUARDRAILS WITH GATES, 4 TOGGLE PINS	2 SIDE FRAMES, 2 BRACES, 8 LOCKING PINS
COMPATIBLE WITH	I-BMSS	I-BMSS, I-CISC, I-CISCTP AND I-CAISC	I-BMSS AND I-CISC
MODEL	I-BMS04	I-BMSGR	I-BMSSEX
UPC	778300100262	778300100279	778300001323

*5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY




SCAFFLOCK

DESCRIPTION	SET OF 4 BASE PLATES	SET OF 4 LEVELING JACKS	SCAFFLOCK™ SAFETY BRAKES
ASSEMBLED DIMENSIONS (W X D X H)	4.75 X 4.75 X 4.75 IN. (12 X 12 X 12 CM)	9.5 X 5.5 X 12.25 IN. (23.6 X 13.5 X 31 CM)	29.25 X 7.5 X 71.9 IN. (74.3 X 19.2 X 182.6 CM)
PACKAGE DIMENSIONS (W X D X H)	11 X 5.25 X 5.5 IN. (27.8 X 13.3 X 13.8 CM)	13 X 13 X 8 IN. (33.6 X 33.2 X 20.4 CM)	36 X 5.25 X 5.25 IN. (91.4 X 13.3 X 13.3 CM)
WEIGHT	10.1 LB (4.6 KG)	24.2 LB (11 KG)	31.1 LB (14.1 KG)
INCLUDED IN THE BOX	4 BASE PLATES, 4 LOCKING PINS	4 LEVELING JACKS	2 SAFETY BRAKES
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS	I-CISC, I-CISCTP, I-CAISC, I-CISCPY AND I-BMSS
MODEL	I-IBBF4	I-IBSJP12H4	I-ISL
UPC	778300001699	778300001644	778300001552

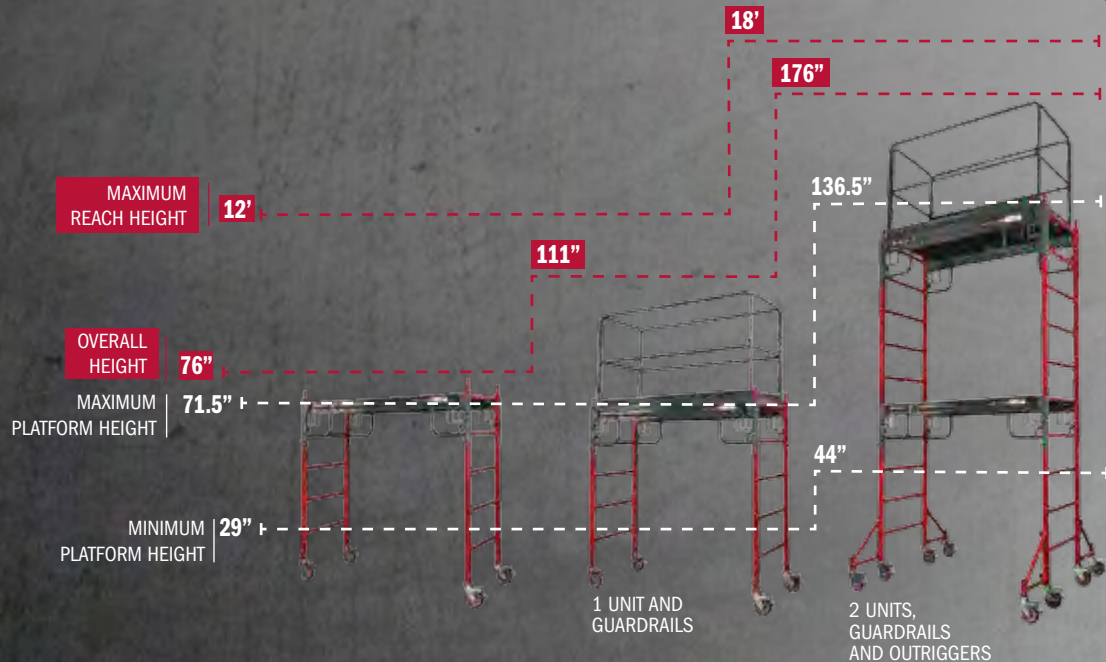

INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE



BUILDMAN™ 6'

INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE



1,000 lb
LOAD CAPACITY

12'
REACH

ASSEMBLED DIMENSIONS (WxDxH)	59.25 X 30 X 74 IN. (150.5 X 76.2 X 188 CM)
PACKAGE DIMENSIONS (WxDxH)	70 X 31.25 X 6 IN. (177.8 X 79.4 X 15.2 CM)
WEIGHT	115 LB (52.3 KG)
LOAD CAPACITY	1,000 LB (454 KG) Combined weight of user + materials. Large platforms: MAX. 375 lb (170 kg) / Small platform: MAX. 250 lb (113 kg)
WORKING HEIGHTS	11.75 - 23.75 - 35.75 - 47.75 - 59.75 - 71.75 PO (29.9 - 60.3 - 90.8 - 121.3 - 151.8 - 182.3 CM)
REACH	12 FT (3.7 M). Stackable up to 2 units high for 18 ft (5.5 m) reach
FINISH	POWDER COATED
PLATFORMS	3 ANTI-SLIP. 14 GAUGE STEEL
STRUCTURE	1.5 IN. (3.8 CM) ROUND TUBE. 16 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 83
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BM6S
UPC	778300100064

INFO



TWO-MINUTE ASSEMBLY
No tools required.



EASY STORAGE
Folds flat for compact storage and transport



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. 1,000 lb (454 kg) capacity.

OPTIONS



BUILDMAN™ GUARDRAILS AND OUTRIGGERS COMPLETE SYSTEM

PACKAGE DIMENSIONS (W X D X H) 55.5 X 43.5 X 3.5 IN. (140.5 X 110.5 X 9 CM)
WEIGHT 114.6 LB (52 KG)

INCLUDED IN THE BOX 2 GUARDRAIL PANELS, 4 OUTRIGGERS, 4 CASTERS, 4 COUPLING PINS, 20 LOCKING PINS, 8 KNOBS, 4 PIG TAILS


COMPATIBLE WITH I-BM6S
STANDARDS ANSI, CSA AND OSHA

MODEL I-BM6SK
UPC 778300100361


DESCRIPTION **GUARDRAILS SYSTEM**
ASSEMBLED DIMENSIONS (W X D X H) 54.5 X 23.5 X 42 IN. (138.4 X 59.4 X 107 CM)
PACKAGE DIMENSIONS (W X D X H) 55.5 X 43.5 X 2.75 IN. (140.5 X 110.5 X 6.9 CM)
WEIGHT 43.2 LB (19.6 KG)
MODEL I-BM6GR
UPC 778300100491

DESCRIPTION **SET OF 4 OUTRIGGERS WITH CASTERS**
ASSEMBLED DIMENSIONS (W X D X H) 21.25 X 4 X 23.75 IN. (54 X 10.2 X 60.1 CM)
PACKAGE DIMENSIONS (W X D X H) 22.75 X 19.75 X 6 IN. (57.6 X 50.2 X 15.5 CM)
WEIGHT 52 LB (23.6 KG)
CASTERS 5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
MODEL I-BM604
UPC 778300100491

DESCRIPTION **SET OF 4 COUPLING PINS**
ASSEMBLED DIMENSIONS (H X DIAM.) 6.5 X 1.9 IN. (16.5 X 4.8 CM)
PACKAGE DIMENSIONS (W X D X H) 11 X 6.5 X 2.5 IN. (28 X 16 X 6.5 CM)
WEIGHT 7.2 LB (3.3 KG)
MODEL I-BM6C4
UPC 778300100538

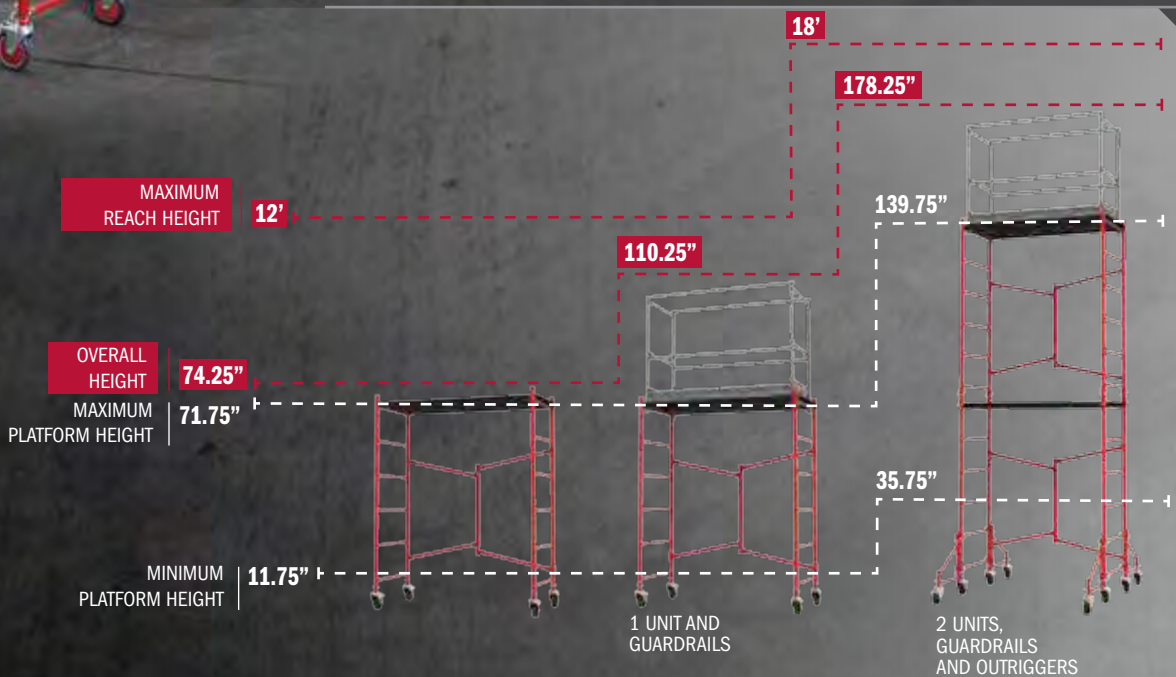

INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE



BUILDMAN™ 4'

INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE

FOLD AWAY TOOL SHELF



750 lb
LOAD CAPACITY

9'
REACH



ASSEMBLED DIMENSIONS (WxDxH)	50.5 X 23.75 X 61.5 IN. (128.3 X 60.3 X 156.2 CM)
PACKAGE DIMENSIONS (WxDxH)	44 X 23.25 X 6.25 IN. (111.8 X 59 X 15.9 CM)
WEIGHT	69 LB (31.3 KG)
LOAD CAPACITY	750 LB (340 KG) Combined weight of user + materials. 450 lb (204 kg) per platform
WORKING HEIGHTS	10 - 21.5 - 33 IN. (25 - 55 - 84 CM)
REACH	9 FT (2.75 M)
FINISH	POWDER COATED
PLATFORMS	2 ANTI-SLIP. 14 GAUGE STEEL
STRUCTURE	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL
REPLACEMENT PARTS	SEE PAGE 83
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-BM4S
UPC	778300100040

INFO



EASY STORAGE
Folds flat for compact storage and transport



TOOL SHELF & SAFETY RAIL
Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. 750 lb (340 kg) capacity.

WALL HAULER™

SERIES 3600

DRYWALL CART

REMOVABLE HANDLE

INFO



KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER



3,600 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	44.25 X 22 X 47.25 IN. (112.4 X 55.9 X 120 CM)			
PACKAGE DIMENSIONS (W X D X H)	46.25 X 38.75 X 4.75 IN. (117.5 X 98.4 X 12.1 CM)			
PLATFORM DIMENSIONS	11.5 X 44.25 IN. (29.2 X 112.4 CM). Can carry up to 22 gypsum boards of 1/2 in. (13 mm).			
WEIGHT	90 LB (40.8 KG)			
LOAD CAPACITY	3,600 LB (1,633 KG)			
FINISH	POWDER COATED			
HANDLE BAR	1.65 IN. (4.2 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL			
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP).			
REPLACEMENT PARTS	SEE PAGE 83			
STANDARDS	ANSI, CSA AND OSHA			
MODELS	I-BMD3631R	I-BMD3631P	I-BMD3631RK	I-BMD3631PK
	8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE.*	8 IN. (20 CM) PHENOLIC CASTERS.*	KINGPINLESS 8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE.*	KINGPINLESS 8 IN. (20 CM) PHENOLIC CASTERS.*
UPC	778300100170	778300100002	778300100187	778300100096

*INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE

INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE

INFO



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



REMOVABLE HANDLE

With its removable support handle, it can easily be transported and stored flat.



FLAT CART

Can also be used as a flat cart to carry bulky loads.



GET THE METALTECH APP



WALL HAULER™

SERIES 3000 DRYWALL CART

PERMAQUICK™



3,000 lb
LOAD CAPACITY

INFO



KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER

ASSEMBLED DIMENSIONS (W X D X H)	43.5 X 24 X 48.75 IN. (110.5 X 61 X 123.8 CM)			
PACKAGE DIMENSIONS (W X D X H)	45 X 37.75 X 6.25 IN. (114.3 X 95.9 X 15.9 CM)			
PLATFORM DIMENSIONS	12 X 42 IN. (30.5 X 106.7 CM). Can carry up to 24 gypsum boards of 1/2 in. (13 mm).			
WEIGHT	107.8 LB (48.9 KG)			
LOAD CAPACITY	3,000 LB (1,361 KG)			
FINISH	POWDER COATED			
HANDLE BAR	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 14 GAUGE STEEL			
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP).			
REPLACEMENT PARTS	SEE PAGE 83			
STANDARDS	ANSI, CSA AND OSHA			
MODELS	I-BMD3031R	I-BMD3031P	I-BMD3031RK	I-BMD3031PK
	8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE.*	8 IN. (20 CM) PHENOLIC CASTERS.*	KINGPINLESS 8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE.*	KINGPINLESS 8 IN. (20 CM) PHENOLIC CASTERS.*
UPC	778300100071	778300100194	778300100255	778300100316

*INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE

INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE

INFO



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



**AS TOUGH
AS WELDED**

PERMAQUICK CONNECT™

PermaQuick Connect™ handle system, once assembled, it is as strong as welded.



OPTION (I-BMDSP)

SLIDING COATING

Optional sliding coating protects the surface against abrasion.

WALL HAULER™ SERIES 3000 DRYWALL CART

WELDED



3,000 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (WXDXH)	49.25 X 22.25 X 48.5 IN. (125.1 X 56.5 X 123.2 CM)
PACKAGE DIMENSIONS (WXDXH)	49.25 X 22.25 X 38.25 IN. (125.1 X 56.5 X 97.2 CM)
PLATFORM DIMENSIONS	11.5 X 42 IN. (29.2 X 106.7 CM). Can carry up to 22 gypsum boards of 1/2 in. (13 mm).
WEIGHT	80 LB (36.3 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
HANDLE BAR	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 14 GAUGE STEEL
CASTERS	8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE. INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP).
REPLACEMENT PARTS	SEE PAGE 83
STANDARDS	ANSI, CSA AND OSHA
FINISH	POWDER COATED
MODEL	I-BMD3131YGR
UPC	778300000104

INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE

OPTION



KINGPINLESS
I-DCC8KPL4



PHENOLIC CASTER
I-DCC8P4

INFO



OPTION (I-BMDSP)

SLIDING COATING
Optional sliding coating protects the surface against abrasion.



HIGH CAPACITY CASTERS
Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



GET THE METALTECH APP

BUILT TOUGH FOR
SAFETY

METALTECH

WALL HAULER™

SERIES 2000 DRYWALL CART

RESIDENTIAL WELDED



3,000 lb
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	38 X 20 X 44.5 IN. (96.5 X 50.8 X 113 CM)
PACKAGE DIMENSIONS (W X D X H)	38 X 20 X 34.25 IN. (96.5 X 50.8 X 87 CM)
PLATFORM DIMENSIONS	10.5 X 38 IN. (26.7 X 96.5 CM). Can carry up to 20 gypsum boards of 1/2 in. (13 mm).
WEIGHT	71.5 LB (32.4 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
HANDLE BAR	1.125 IN. (2.9 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL
CASTERS	8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE. INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
REPLACEMENT PARTS	SEE PAGE 83
SLIDING COATING	STANDARD
STANDARDS	ANSI, CSA AND OSHA
FINISH	POWDER COATED
MODEL	I-BMD2131YGR
UPC	778300000098

INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE

INFO



SLIDING COATING

Sliding coating protects the surface against abrasion.



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.

OPTION



KINGPINLESS
I-DCC8KPL4



PHENOLIC CASTER
I-DCC8P4

WALL HAULER™ SERIES 2000 DRYWALL CART

RESIDENTIAL PERMAQUICK™



2,000 lb
LOAD CAPACITY

INFO



KINGPINLESS



POLYURETHANE CASTER



PHENOLIC CASTER

ASSEMBLED DIMENSIONS (WxDxH)	39 X 19.25 X 44.25 IN. (99 X 48.9 X 112.4 CM)		
PACKAGE DIMENSIONS (WxDxH)	40.75 X 32.5 X 6.5 IN. (103.5 X 82.6 X 16.5 CM)		
PLATFORM DIMENSIONS	9.5 X 37.5 IN. (24.1 X 95.3 CM). Can carry up to 18 gypsum boards of 1/2 in. (13 mm).		
WEIGHT	76.3 LB (34.6 KG)		
LOAD CAPACITY	2,000 LB (907 KG)		
FINISH	POWDER COATED		
HANDLE BAR	1.25 IN. (3.2 CM) OUTSIDE DIAMETER. 16 GAUGE STEEL		
REPLACEMENT PARTS	SEE PAGE 83		
STANDARDS	ANSI, CSA AND OSHA		
MODELS	I-BMD2031R	I-BMD2031P	I-BMD2031RK
	8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE.*	8 IN. (20 CM) PHENOLIC CASTERS.*	KINGPINLESS 8 IN. (20 CM) POLYURETHANE CASTERS ON POLYPROPYLENE CORE.*
UPC	778300100439	778300100446	778300100453
			I-BMD2031PK
			KINGPINLESS 8 IN. (20 CM) PHENOLIC CASTERS.*
			778300100460

*INCLUDED : 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE

INDUSTRIAL AND DRYWALL - BUILDMAN™ GRADE



HIGH CAPACITY CASTERS

Four 8 in. (20 cm) high capacity casters for ease of movement in straight lines.



**AS TOUGH
AS WELDED**

PERMAQUICK CONNECT™

PermaQuick Connect™ handle system, once assembled, it is as strong as welded.



MOVE IN A SMALL SPACE

This narrower model is made to move drywall sheets in a small space, turn your load on a dime!

INFO



GET THE METALTECH APP



ALUMINUM SCAFFOLDING



Metaltech's Aluminum scaffolds are our lightest range of scaffolding. It is a high strength system, designed for quick and easy assembly. The Aluminum is a flexible and low maintenance solution used for all jobsites work. Our Span 300 and 400 towers are available in narrow and wide width and in heights ranging from 13' to 39'. They are compatible with Instant Upright, Alufase and Vault scaffolding.†

- **LIGHT WEIGHT**
- **HIGH STRENGTH SYSTEM**
- **QUICK & EASY ASSEMBLY**
- **HIGH DURABILITY**
- **HIGHLY VERSATILE**

†All trademarks and registered trademarks listed above are the property of their respective owners.



**BUILT TOUGH FOR
SAFETY**

METALTECH

ALUMINUM TOWER SPAN 300 KITS

ALUMINUM SCAFFOLDING

INFO

Compatible with Instant Upright, Alufase and Vault scaffolding.[†]

STANDARDS

Meets OSHA standard 29 CFR PT.1926 and CSA standard S269.2 M87



SPAN 300 NARROW KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	AL-F3001	AL-G3000	AL-G4101	AL-D0002	AL-B0002	AL-P0002	AL-T0102	AL-C0002	AL-U0001	AL-Q0000	AL-Q0002
AL-K3007	13'-1 1/2" (4 M)	339 LB (154 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 16'-8 1/2" (2.496 X 0.677 X 5.092 M)	4	2	2	4	5	2	1	4	4	4	0
AL-K3013	19'-8 1/4" (6 M)	447 LB (203 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 23'-8 1/4" (2.496 X 0.677 X 7.092 M)	6	2	2	7	9	3	1	4	4	4	0
AL-K3019	26'-3" (8 M)	563 LB (256 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 29'-10" (2.496 X 0.677 X 9.092 M)	8	2	2	9	13	4	1	4	4	0	4



SPAN 300 WIDE KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	AL-F3003	AL-G3001	AL-G4101	AL-D0002	AL-B0002	AL-P0101	AL-P0002	AL-T0103	AL-C0002	AL-U0001	AL-Q0000	AL-Q0002
AL-K3028	13'-1 1/2" (4 M)	422 LB (192 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 16'-8 1/2" (2.496 X 1.290 X 5.092 M)	4	2	2	6	5	1	2	1	4	4	4	0
AL-K3034	19'-8 1/4" (6 M)	546 LB (248 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 23'-8 1/4" (2.496 X 1.290 X 7.092 M)	6	2	2	10	9	1	3	1	4	4	4	0
AL-K3040	26'-3" (8 M)	671 LB (305 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 29'-10" (2.496 X 1.290 X 9.092 M)	8	2	2	14	13	1	4	1	4	4	4	0
AL-K3046	32'-9 3/4" (10 M)	805 LB (366 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 36'-4 3/4" (2.496 X 1.290 X 11.092 M)	10	2	2	17	17	1	5	1	4	4	0	4
AL-K3052	39'-4 1/2" (12 M)	926 LB (421 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 42'-11 3/8" (2.496 X 1.290 X 13.092 M)	12	2	2	20	21	1	6	1	4	4	0	4



[†] All trademarks and registered trademarks listed above are the property of their respective owners.

ALUMINUM TOWER SPAN 400 KITS



INFO

Compatible with Instant Upright, Alufase and Vault scaffolding.[†]

STANDARDS

Meets OSHA standard 29 CFR PT.1926 and CSA standard S269.2 M87


ALUMINUM SCAFFOLDING

SPAN 400 NARROW KITS



MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	AL-F4002	AL-G4000	AL-G4101	AL-D0002	AL-B0002	AL-P0002	AL-T0102	AL-C0002	AL-J0001	AL-O0000	AL-O0002
AL-K4007	13'-9 3/8" (4.2 M)	326 LB (148 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 17'-4 3/8" (2.496 X 0.677 X 5.292 M)	4	2	2	4	5	2	1	4	4	4	0
AL-K4013	20'-8" (6.3 M)	427 LB (194 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 24'-3" (2.496 X 0.677 X 7.392 M)	6	2	2	7	9	3	1	4	4	4	0
AL-K4019	27'-2 3/4" (8.3 M)	539 LB (245 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 30'-9 3/4" (2.496 X 0.677 X 9.392 M)	8	2	2	9	13	4	1	4	4	0	4

SPAN 400 WIDE KITS



MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	AL-F4005	AL-G4001	AL-G4101	AL-D0002	AL-B0002	AL-P0101	AL-P0002	AL-T0103	AL-C0002	AL-J0001	AL-O0000	AL-O0002
AL-K4028	13'-9 3/8" (4.2 M)	409 LB (186 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 17'-4 3/8" (2.496 X 1.290 X 5.292 M)	4	2	2	6	5	1	2	1	4	4	4	0
AL-K4034	20'-8" (6.3 M)	528 LB (240 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 24'-3" (2.496 X 1.290 X 7.392 M)	6	2	2	10	9	1	3	1	4	4	4	0
AL-K4040	27'-2 3/4" (8.3 M)	647 LB (294 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 30'-9 3/4" (2.496 X 1.290 X 9.392 M)	8	2	2	14	13	1	4	1	4	4	4	0
AL-K4046	34'-1 1/2" (10.4 M)	777 LB (353 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 37'-8 1/2" (2.496 X 1.290 X 11.492 M)	10	2	2	17	17	1	5	1	4	4	0	4
AL-K4052	41'-0 1/8" (12.5 M)	889 LB (404 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 44'-7 1/8" (2.496 X 1.290 X 13.592 M)	12	2	2	20	21	1	6	1	4	4	0	4



GET THE METALTECH APP




ALUMINUM SCAFFOLDING

SPAN 300

INFO

Compatible with Instant Upright, Alufase and Vault scaffolding.[†]





SPAN 300 FRAME			
DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW FRAME	26 5/8 X 43 1/2 IN. (0.677 X 1.106 M)	12.5 LB (5.7 KG)	AL-F3000
	26 5/8 X 76 1/8 IN. (0.677 X 1.934 M)	18.7 LB (8.5 KG)	AL-F3001
WIDE FRAME	50 3/4 X 43 1/2 IN. (1.290 X 1.106 M)	18.7 LB (8.5 KG)	AL-F3002
	50 3/4 X 76 1/8 IN. (1.290 X 1.934 M)	24.6 LB (11.2 KG)	AL-F3003

SPAN 300 GUARDRAIL			
DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW GUARDRAIL FRAME WITH UPPER PIN SYSTEM	26 5/8 X 32 1/4 IN. (0.677 X 0.818 M)	6 LB (2.7 KG)	AL-G3000
NARROW GUARDRAIL FRAME WITH LOWER PIN SYSTEM	26 5/8 X 42 IN. (0.677 X 1.066 M)	6.2 LBS (2.8 KG)	AL-G3002
WIDE GUARDRAIL FRAME WITH UPPER PIN SYSTEM	50 3/4 X 32 1/4 IN. (1.290 X 0.818 M)	8.8 LB (4 KG)	AL-G3001
WIDE GUARDRAIL FRAME WITH LOWER PIN SYSTEM	50 3/4 X 42 IN. (1.290 X 1.066 M)	9 LB (4.1 KG)	AL-G3003

SPAN 300 FOLDABLE BASE			
DESCRIPTION	DIMENSIONS (W X D X H)	WEIGHT	MODEL
NARROW FOLDABLE BASE	75 1/4 X 26 5/8 X 71 IN. (1.912 X 0.677 X 1.803 M)	55.4 LB (25.2 KG)	AL-Q3000
	8 FT 2 1/4 IN. X 26 5/8 IN. X 71 IN. (2.496 X 0.677 X 1.803 M)	57.6 LB (26.2 KG)	AL-Q3001
WIDE FOLDABLE BASE	8 FT 2 1/4 IN. X 50 3/4 IN. X 71 IN. (2.496 X 1.290 X 1.803 M)	76.1 LB (34.6 KG)	AL-Q3004

SPAN 300 LADDER			
DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
6-STEPS LADDER WITH LATCH	78.7 IN. (2 M)	N/A	AL-L0002

SPAN 400



SPAN 400 FRAME			
DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW FRAME	26 5/8 X 48 7/8 IN. (0.677 X 1.243 M)	8.8 LB (4 KG)	AL-F4000
	26 5/8 X 65 1/4 IN. (0.677 X 1.657 M)	18.6 LB (8.4 KG)	AL-F4001
	26 5/8 X 81 5/8 IN. (0.677 X 2.072 M)	16.4 LB (7.4 KG)	AL-F4002
WIDE FRAME	50 3/4 X 48 7/8 IN. (1.290 X 1.243 M)	13 LB (5.9 KG)	AL-F4003
	50 3/4 X 65 1/4 IN. (1.290 X 1.657 M)	16.7 LB (7.6 KG)	AL-F4004
	50 3/4 X 81 5/8 IN. (1.290 X 2.072 M)	20.6 LB (9.3 KG)	AL-F4005

SPAN 400 FRAME WITH LADDER SPAN			
DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW FRAME WITH LADDER SPAN	26 5/8 X 81 5/8 IN. (0.677 X 2.072 M)	23.3 LB (10.6 KG)	AL-F4101
WIDE FRAME WITH LADDER SPAN	50 3/4 X 81 5/8 IN. (1.290 X 2.072 M)	27.7 LB (12.6 KG)	AL-F4103

SPAN 400 GUARDRAIL			
DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW GUARDRAIL FRAME WITH UPPER PIN SYSTEM	26 5/8 X 27 5/8 IN. (0.677 X 0.703 M)	6.4 LB (2.9 KG)	AL-G4000
WIDE GUARDRAIL FRAME WITH UPPER PIN SYSTEM	50 3/4 X 27 5/8 IN. (1.290 X 0.703 M)	8 LB (3.6 KG)	AL-G4001
FRAME GUARDRAIL BRACING	75 1/4 IN. (1.912 M)	11.3 LB (5.1 KG)	AL-G4100
	8 FT 2 1/4 IN. (2.496 M)	13 LB (5.9 KG)	AL-G4101
	10 FT (3.048 M)	14.5 LB (6.6 KG)	AL-G4102

SPAN 300 NARROW FOLDABLE SCAFFOLD



DIMENSIONS (W X D X H)	75 1/4 X 26 5/8 X 78 IN. (1.912 X 0.677 X 1.980 M)
INCLUDES	CASTERS AND TRAPDOOR PLATFORM
WEIGHT	82.9 LB (37.6 KG)
MODEL	AL-Q3101

BRACE

DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
DIAGONAL BRACE	82 IN. (2.084 M)	4 LB (1,8 KG)	AL-D0001
	8 FT 7 1/2 IN. (2.630 M)	4.8 LB (2.2 KG)	AL-D0002
	10 FT 8 1/8 IN. (3.25 M)	5.5 LB (2.5 KG)	AL-D0003
HORIZONTAL BRACE	75 1/4 IN. (1.912 M)	3.7 LB (1.7 KG)	AL-B0001
	8 FT 2 1/4 IN. (2.496 M)	4.4 LB (2 KG)	AL-B0002
	10 FT (3.048 M)	5.3 LB (2.4 KG)	AL-B0003

PLATFORM

DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
ALUMINUM PLATFORM WITH ANTI-SLIP PLYWOOD DECK*	78 7/8 X 24 IN. (2 X 0.609 M)	30.4 LB (13.8 KG)	AL-P0100
	8 FT 2 1/4 IN. X 24 IN. (2.496 X 0.609 M)	37.9 LB (17.2 KG)	AL-P0101
	10 FT X 24 IN. (3.048 X 0.609 M)	43.3 LB (19.7 KG)	AL-P0102
ALUMINUM TRAPDOOR PLATFORM WITH ANTI-SLIP PLYWOOD DECK*	75 1/4 X 24 IN. (1.912 X 0.609 M)	31 LB (14.1 KG)	AL-P0001
	8 FT 2 1/4 IN. X 24 IN. (2.496 X 0.609 M)	38.5 LB (17.5 KG)	AL-P0002
	10 FT X 24 IN. (3.480 X 0.609 M)	44 LB (20 KG)	AL-P0003

TOEBOARD

DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
NARROW WOODEN TOEBOARD SET	75 1/4 X 27 1/8 IN. (1.912 X 0.689 M)	15 LB (6.8 KG)	AL-T0100
	8 FT 2 1/4 IN. X 27 1/8 IN. (2.496 X 0.689 M)	18.8 LB (8.4 KG)	AL-T0102
WIDE WOODEN TOEBOARD SET	75 1/4 X 51 1/8 IN. (1.912 X 1.298 M)	19.1 LB (8.7 KG)	AL-T0101
	8 FT 2 1/4 IN. X 51 1/8 IN. (2.496 X 1.298 M)	25.3 LB (11.5 KG)	AL-T0103

BASE

DESCRIPTION	DIMENSIONS (W X H)	WEIGHT	MODEL
SWIVEL POLYURETHANE CASTER WITH NON-MARKING TREAD	5 IN. (0.125 M)	5 LB (2.3 KG)	AL-C0000
HIGH ADJUSTABLE LEG	8 IN. (0.200 M)	9.6 LB (4.4 KG)	AL-C0002
	16 IN. (0.406 M)	2.4 LB (1.1 KG)	AL-J0001
SWIVEL BASE PLATE	24 1/4 IN. (0.615 M)	3.1 LB (1.4 KG)	AL-J0002
	6 X 6 IN. (15.2 X 15.2 CM)	1.42 LB (0.6 KG)	AL-A0000

OUTRIGGER

DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
TELESCOPIC OUTRIGGER	68 1/8 IN. TO 8 FT 1/8 IN. (1.730 TO 2.440 M)	11.4 LB (5.2 KG)	AL-O0000
OUTRIGGER	72 3/4 IN. (1.849 M)	8.8 LB (4 KG)	AL-O0001
	10 FT 6 IN. (3.200 M)	15 LB (6.8 KG)	AL-O0002

CLAMP

DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
IN-LINE CLAMP	Ø 1.99 IN. (0.505 CM)	1.2 LB (0.5 KG)	AL-A0001

*Maximum load capacity: 25 lb/sq. ft. (122 kg/m²)

†All trademarks and registered trademarks listed above are the property of their respective owners.



EASY-SET SCAFFOLD TOWER™

EASY-SET SCAFFOLD TOWER™



800 lb
LOAD CAPACITY

12'
REACH



12'
REACH



18'
REACH

	6' EASY-SET SCAFFOLD TOWER™	6' EASY-SET SCAFFOLD TOWER™ WITH GUARDRAILS	12' EASY-SET SCAFFOLD TOWER™ WITH GUARDRAILS AND OUTRIGGERS
DIMENSIONS (W X D X H)	65 X 31 X 72 IN. (165 X 78 X 185 CM)	65 X 31 X 108 IN. (165 X 78 X 275 CM)	65 X 31 X 180 IN. (165 X 78 X 455 CM)
STANDING HEIGHT	6 FT (1.8M)	6 FT (1.8M)	12 FT (3.5M)
REACH HEIGHT	12 FT (3.5M)	12 FT (3.5M)	18 FT (5.3M)
PACKAGE DIMENSIONS (W X D X H)	75 X 32 1/2 X 11 1/2 IN. (190 X 82 X 29 CM)	75 X 32 1/2 X 21 1/4 IN. (190 X 82 X 54 CM)	75 X 32 1/2 X 28 3/4 IN. (190 X 82 X 73 CM)
PACKAGING WEIGHT	72.9 LB (33.1 KG)	159.2 LB (72.2 KG)	268 LB (121.5 KG)
LOAD CAPACITY	800 LB (363 KG)	800 LB (363 KG)	800 LB (363 KG)
STANDARDS	ANSI/ASSE A10.8-2011 AND CSA 269.2-M87	ANSI/ASSE A10.8-2011 AND CSA 269.2-M87	ANSI/ASSE A10.8-2011 AND CSA 269.2-M87
MODEL	AL-Q0100	AL-Q0105	AL-Q0106
UPC	778300001460	778300001477	778300001484
	INCLUDED IN PACK	INCLUDED IN PACK	INCLUDED IN PACK
	QTY.	QTY.	QTY.
	1 FOLDABLE BASE	1 FOLDABLE BASE	1 FOLDABLE BASE
	1 PLATFORM	1 PLATFORM	2 PLATFORM
	1 DIAGONAL BRACE	2 DIAGONAL BRACE	4 DIAGONAL BRACE
	4 CASTER	4 CASTER	4 CASTER
		5 HORIZONTAL BRACE	9 HORIZONTAL BRACE
		2 4 RUNG EXTENSION FRAME	2 4 RUNG EXTENSION FRAME
			4 OUTRIGGER
			1 TOE BOARD SET
			2 7 RUNG EXTENSION FRAME

INFO



**BRACE HOOK
FRAME LOCKING PIN**



**ADJUSTABLE LEG AND
CASTER**



OUTRIGGER EXTENSION



24'
REACH



30'
REACH

**18' EASY-SET SCAFFOLD TOWER™
WITH GUARDRAILS AND OUTRIGGERS**

DIMENSIONS (W X D X H)	65 X 31 X 252 IN. (165 X 78 X 640 CM)
STANDING HEIGHT	18 FT (5.3M)
REACH HEIGHT	24 FT (7.1M)
PACKAGE DIMENSIONS (W X D X H)	75 X 32 1/2 X 33 1/2 IN. (190 X 82 X 85 CM)
PACKAGING WEIGHT	322.6 LB (146.3 KG)
LOAD CAPACITY	800 LB (363 KG)
STANDARDS	ANSI/ASSE A10.8-2011 AND CSA 269.2-M87
MODEL	AL-Q0107
UPC	778300001491

**24' EASY-SET SCAFFOLD TOWER™
WITH GUARDRAILS AND OUTRIGGERS**

DIMENSIONS (W X D X H)	65 X 31 X 324 IN. (165 X 78 X 823 CM)
STANDING HEIGHT	24 FT (7.1M)
REACH HEIGHT	30 FT (8.9M)
PACKAGE DIMENSIONS (W X D X H)	88.5 X 32.5 X 42 IN. (225 X 82 X 107 CM)
PACKAGING WEIGHT	431.5 LB (195.7 KG)
LOAD CAPACITY	800 LB (363 KG)
STANDARDS	ANSI/ASSE A10.8-2011 AND CSA 269.2-M87
MODEL	AL-Q0108
UPC	778300001729

INCLUDED IN PACK

QTY.	
1	FOLDABLE BASE
2	PLATFORM
8	DIAGONAL BRACE
4	ADJUSTABLE LEG WITH CASTER
9	HORIZONTAL BRACE
2	4 RUNG EXTENSION FRAME
4	OUTRIGGER
1	TOE BOARD SET
4	7 RUNG EXTENSION FRAME

INCLUDED IN PACK

QTY.	
1	FOLDABLE BASE
3	PLATFORM
10	DIAGONAL BRACE
4	ADJUSTABLE LEG WITH CASTER
13	HORIZONTAL BRACE
2	4 RUNG EXTENSION FRAME
4	JUMBO OUTRIGGER
1	TOE BOARD SET
6	7 RUNG EXTENSION FRAME



PLATFORM HOOK



FOLDING BASE UNIT



GET THE METALTECH APP



FIBERGLASS SERIES™ SCAFFOLDING



The Fiberglass Series™ scaffolding offering is designed for uses when non-conductive, static free or chemical resistance is required. Easy to set up and lighter than steel or aluminum scaffold types, it can quickly be assembled and moved into position.

- **NON-CONDUCTIVE**
- **CHEMICAL ENVIRONMENTS**
- **VERY LIGHT**



FIBERGLASS SERIES™ SCAFFOLDING

**BUILT TOUGH FOR
SAFETY**

METALTECH

THE TOWER


TESTED IN CONFORMITY TO CSA STANDARD S269.2 M87

INFO

Imperial units for reference only.



FIBERGLASS SERIES™ SCAFFOLDING

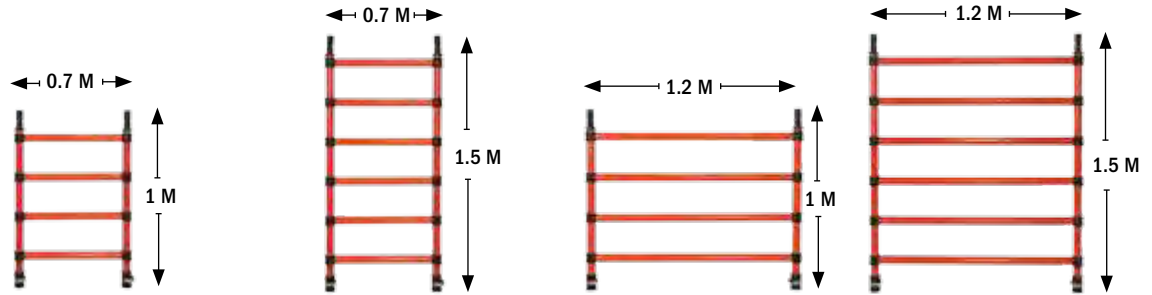

DESCRIPTION	1 X 0.7 M FRAME	1.5 X 0.7 M FRAME	1 X 1.2 M FRAME	1.5 X 1.2 M FRAME
DIMENSIONS (H X W)	1 X 0.7 M (3'-3 3/8" X 2'-3 9/16")	1.5 X 0.7 M (4'-11 1/16" X 2'-3 9/16")	1 X 1.2 M (3'-3 3/8" X 3'-11 1/4")	1.5 X 1.2 M (4'-11 1/16" X 3'-11 1/4")
WEIGHT	4 KG (8.8 LB)	4.8 KG (10.6 LB)	5.4 KG (11.9 LB)	6.8 KG (15 LB)
STANDARDS	CSA - S269.2 M87	CSA - S269.2 M87	CSA - S269.2 M87	CSA - S269.2 M87
MODEL	F-FRA0710L	F-FRA0715L	F-FRA1210L	F-FRA1215L




DESCRIPTION	TOEBOARD BRACKET
DIMENSIONS	N/A
WEIGHT	0.35 KG (0.8 LB)
STANDARDS	CSA - S269.2 M87
MODEL	F-TBBRACK



TOEBOARD			
DIMENSIONS	WEIGHT	STANDARDS	MODEL
0.7 M (2'-3 9/16")	1.1 KG (2.4 LB)	CSA - S269.2 M87	F-TB07
1.2 M (3'-11 1/4")	2.2 KG (4.9 LB)	CSA - S269.2 M87	F-TB12
2.4 M (7'-10 1/2")	4.2 KG (9.3 LB)	CSA - S269.2 M87	F-TB24


THE TOWER ACCESSORIES

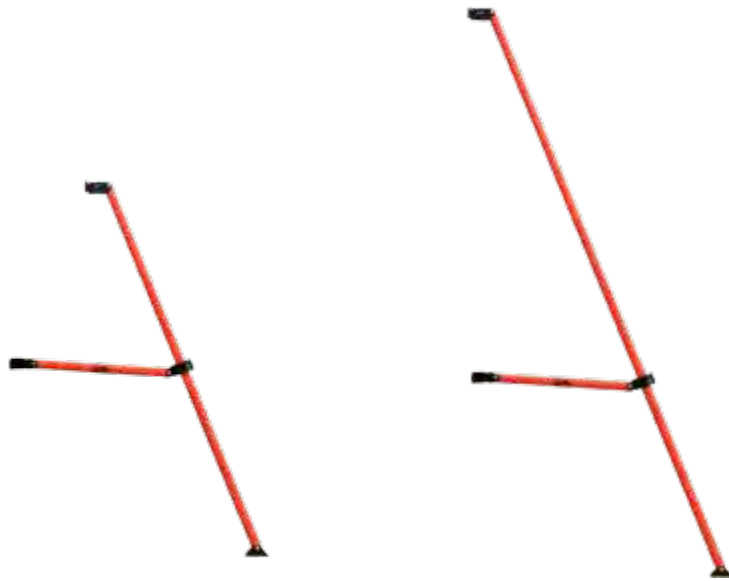

DESCRIPTION	2 M OUTRIGGER	3.05 M OUTRIGGER	CASTER WITH LEVELING JACK
DIMENSIONS	2 M (6'-6 3/4")	3.05 M (10' 3/32")	85 CM (2'-9 15/32")
WEIGHT	3 KG (6.6 LB)	4 KG (8.8 LB)	6.12 KG (13.5 LB)
STANDARDS	CSA - S269.2 M87	CSA - S269.2 M87	CSA - S269.2 M87
MODEL	F-OUT20	F-OUT30	F-ADJ200




BRACE					
DESCRIPTION	DIMENSIONS	WEIGHT	STANDARDS	COLOR ID	MODEL
HORIZONTAL	2.4 M (7'-10 1/2")	2.4 KG (5.3 LB)	CSA - S269.2 M87	YELLOW	F-BRAH24
DIAGONAL	2.6 M (8'-6")	2.81 KG (6.2 LB)	CSA - S269.2 M87	BLUE	F-BRAD24
0.7 M BRACE PLAN	0.7 X 2.4 M (2' X 7'-10 1/2")	2.81 KG (6.2 LB)	CSA - S269.2 M87	RED	F-PBRA0724
1.2 M BRACE PLAN	1.2 X 2.4 M (4' X 7'-10 1/2")	2.9 KG (6.4 LB)	CSA - S269.2 M87	RED	F-PBRA1224

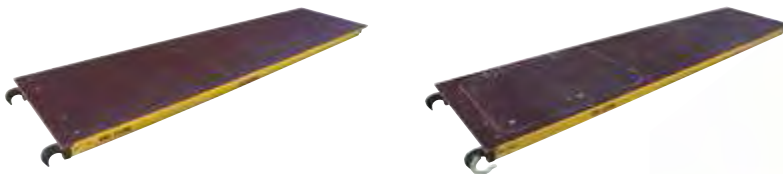

DESCRIPTION	PLATFORM ANTI-SLIP	PLATFORM ANTI-SLIP WITH TRAP DOOR	ACCESS LADDER
DIMENSIONS	2.4 M (7'-10 1/2")	2.4 M (7'-10 1/2")	2.4 - 3.65 M (7'-10 1/2" X 11'-11 11/16")
CAPACITY	226.8 KG (500 LB)	226.8 KG (500 LB)	149.69 KG (330 LB)
WEIGHT	22.27 KG (49.1 LB)	20.28 KG (44.7 LB)	15.47 KG (34.1 LB)
STANDARDS	CSA - S269.2 M87	CSA - S269.2 M87	CSA - S269.2 M87
MODEL	F-DP24	F-DH24	F-LAD2436

FIBERGLASS SERIES™ SCAFFOLDING



GET THE METALTECH APP



FIBERGLASS TOWER KITS

TESTED IN CONFORMITY TO CSA STANDARD S269.2 M87

UP TO 20 TOWER KITS


0.7 M WIDE FIBERGLASS TOWER KITS

MODEL	TOWER KIT DIMENSIONS	PARTS LIST																		
		F-FRA0710L	F-FRA0715L	F-FRA1210L	F-FRA1215L	F-BRAH24	F-BRAD24	F-PBRA0724	F-PBRA1224	F-DP24	F-DH24	F-AD200	F-OUT20	F-OUT30	F-LAD2436	F-TB07	F-TB12	F-TB24	F-TBBRACK	
F-KIT0715	1.5 M (4'-11 1/16")	2	2			4	2	1		1		4								
F-KIT0720	2 M (6'-6 3/4")		4			6	4	1		1		4	4			2		2		4
F-KIT0725	2.5 M (8'-2 7/16")	4	2			6	4	1			1	4	4		1	2		2		4
F-KIT0730	3 M (9'-10 1/8")	2	4			6	6	1			1	4	4		1	2		2		4
F-KIT0735	3.5 M (11'-5 25/32")		6			6	6	1			1	4		4	1	2		2		4
F-KIT0740	4 M (13'-1 15/32")	4	4			6	8	1			1	4		4	1	2		2		4
F-KIT0745	4.5 M (14'-9 5/32")	2	6			6	8	1			1	4		4	1	2		2		4
F-KIT0750	5 M (16'-4 27/32")		8			8	8	1			2	4		4	2	2		2		4

1.2 M WIDE FIBERGLASS TOWER KITS

F-KIT1215	1.5 M (4'-11 1/16")			2	2	4	2		1	2		4								
F-KIT1220	2 M (6'-6 3/4")				4	6	4		1	2		4					2	2		4
F-KIT1225	2.5 M (8'-2 7/16")			4	2	6	4		1	1	1	4			1		2	2		4
F-KIT1230	3 M (9'-10 1/8")			2	4	6	6		1	1	1	4		4	1		2	2		4
F-KIT1235	3.5 M (11'-5 25/32")				6	6	6		1	1	1	4		4	1		2	2		4
F-KIT1240	4 M (13'-1 15/32")			4	4	6	8		1	1	1	4		4	1		2	2		4
F-KIT1245	4.5 M (14'-9 5/32")			2	6	6	8		1	1	1	4		4	1		2	2		4
F-KIT1250	5 M (16'-4 27/32")				8	8	10		1	1	2	4		4	2		2	2		4
F-KIT1255	5.5 M (18' 17/32")			4	6	8	10		1	1	2	4		4	2		2	2		4
F-KIT1260	6 M (19'-8 7/32")			2	8	8	12		1	1	2	4		4	2		2	2		4
F-KIT1265	6.5 M (21'-3 29/32")			6	6	8	12		1	1	2	4		4	2		2	2		4
F-KIT1270	7 M (22'-11 19/32")			4	8	8	14		1	1	2	4		4	2		2	2		4

Imperial unit for approximate reference

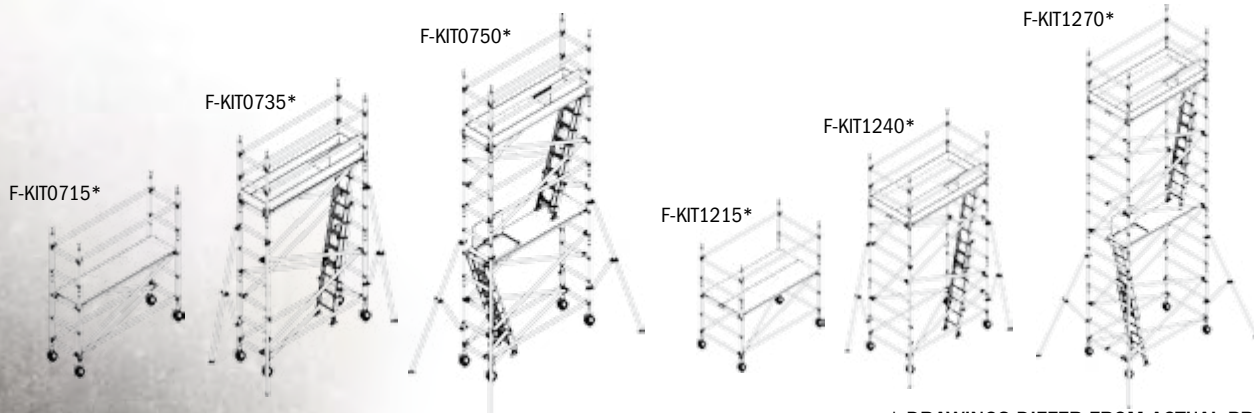

* DRAWINGS DIFFER FROM ACTUAL PRODUCTS

FIBERGLASS SERIES™ SCAFFOLDING

SPEEDY™ SCAFFOLDING

TESTED IN CONFORMITY TO CSA STANDARD S269.2 M87



INFO

Imperial units for reference only.

3 m
REACH

227 kg
LOAD CAPACITY

ASSEMBLED DIMENSIONS (WxDxH)	196 X 74 X 196 CM (77 3/16 X 29 1/8 X 77 3/16 IN.)
PACKAGE DIMENSIONS (WxDxH)	78 X 206 X 27 CM (30 3/4 X 81 1/8 X 10 5/8 IN.)
WEIGHT	43.5 KG (96 LB)
LOAD CAPACITY	227 KG (500 LB)
REACH	3 M (9' 10 1/8")
PLATFORMS	ANTI-SLIP
STRUCTURE	5 CM (2 IN.) TUBULAR FIBERGLASS
CASTERS	13 CM (5 IN.) DOUBLE LOCKING HEAVY DUTY
STANDARD	TESTED IN CONFORMITY TO CSA STANDARD S269.2 M87
MODEL	F-ISPC
UPC	778300700660

FIBERGLASS SERIES™ SCAFFOLDING



- » Compact storage
- » Easily assembled




- » Light weight
- » Corrosion resistant



- » Non conductive
- » Prevent static electricity

INFO



LADDERS, STEPLADDERS AND WORK PLATFORMS

Metaltech provides a range of ladders and stepladders to complete its work at heights products category, they are designed for specific and multi-purpose use, for interior or exterior applications. Most are built to include aluminum in their construction, they are lightweight, safe, versatile and easy to store.

- **LIGHTWEIGHT**
- **VERSATILITY**
- **EASE AND SAFE TO USE**



LADDERS, STEPLADDERS AND WORK PLATFORMS

**BUILT TOUGH FOR
SAFETY**

METALTECH

12.5' TELESCOPIC LADDER

LADDERS, STEPLADDERS AND WORK PLATFORMS

250 lb
LOAD CAPACITY

16'
REACH

SAFETY GRADE 1

OPEN (W X D X H)	19 X 4.5 X 150 IN. (48.3 X 11.4 X 381 CM)
CLOSED (W X D X H)	19 X 4.5 X 32 IN. (48.3 X 11.4 X 81.3 CM)
PACKAGE DIMENSIONS (W X D X H)	21 X 5.25 X 33.5 IN. (53.3 X 13.3 X 85 CM)
REACH	16 FT (4.9 M)
WEIGHT	25 LB (11 KG)
LOAD CAPACITY	250 LB (113 KG)
OPTION	CARRYING BAG
STANDARD	CSA GRADE 1
MATERIAL	AIRCRAFT GRADE ALUMINUM ALLOY 6061-T6
MODEL	E-LAD12T2
UPC	778300401222

INFO



SAFE AND COMPACT



ADJUSTABLE TO REQUIRED HEIGHT



LIGHTWEIGHT



15.5' TELESCOPIC LADDER

SAFETY GRADE 1

19'
REACH

250 lb
LOAD CAPACITY

OPEN (W X D X H)	19.5 X 4.5 X 188.5 IN. (49.5 X 11.4 X 478.8 CM)
CLOSED (W X D X H)	19.5 X 4.5 X 36 IN. (49.5 X 11.4 X 91.4 CM)
PACKAGE DIMENSIONS (W X D X H)	21.5 X 6 X 38 IN. (54.6 X 15.2 X 96.5 CM)
REACH	19 FT (5.8 M)
WEIGHT	40.5 LB (18.4 KG)
LOAD CAPACITY	250 LB (113 KG)
STANDARD	CSA GRADE 1
MATERIAL	AIRCRAFT GRADE ALUMINUM ALLOY 6061-T6
MODEL	E-LAD15T1
UPC	778300401512



LADDERS, STEPLADDERS AND WORK PLATFORMS

INFO



SAFE AND COMPACT



ADJUSTABLE TO REQUIRED HEIGHT



LIGHTWEIGHT



GET THE METALTECH APP

BUILT TOUGH FOR SAFETY

METALTECH

TELESCOPING MULTI-POSITION LADDER

5 IN 1

300 lb
LOAD CAPACITY

LADDERS, STEPLADDERS AND WORK PLATFORMS



DESCRIPTION	13' MULTI-POSITION LADDER	17' MULTI-POSITION LADDER	21' MULTI-POSITION LADDER	25' MULTI-POSITION LADDER
CLOSED DIMENSIONS (W X D X H)	22.25 X 7.75 X 42.75 IN. (56.5 X 19.7 X 108.6 CM)	23.5 X 8 X 54.5 IN. (59.7 X 20.3 X 138.4 CM)	26.75 X 8.75 X 66.5 IN. (67.9 X 22.2 X 168.9 CM)	29.5 X 8 X 78.5 IN. (74.9 X 20.3 X 199.4 CM)
LADDER HEIGHT	13 FT (4 M)	17 FT (5.2 M)	21 FT (6.4 M)	25 FT (7.6 M)
MAXIMUM REACH*	14 FT 4 IN. (4.4 M)	18 FT 1 IN. (5.5 M)	22 FT (6.7 M)	26 FT (7.9 M)
WEIGHT	27.6 LB (12.5 KG)	34.5 LB (15.6 KG)	42.3 LB (19.2 KG)	53.1 LB (24.1 KG)
NUMBER OF POSITIONS	19	28	38	49
LOAD CAPACITY	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM
STANDARD	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA
MODEL	E-MTL7000AL	E-MTL7100AL	E-MTL7200AL	E-MTL7300AL
UPC	778300001590	778300001606	778300001613	778300000937


HIGHEST STANDING LEVEL				
STEPLADDER	2 FT 11 IN. (0.89 M)	4 FT 9 IN. (1.4 M)	6 FT 9 IN. (2.1 M)	8 FT 7 IN. (2.6 M)
EXTENSION LADDER	7 FT 9 IN. (2.4 M)	11 FT 7 IN. (3.5 M)	15 FT 5 IN. (3.5 M)	20 FT (6.1 M)
SCAFFOLD SUPPORTS	1 FT 11 IN. (0.58 M)	2 FT 11 IN. (0.89 M)	3 FT 10 IN. (1.2 M)	4 FT 9 IN. (1.4 M)

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach.

INFO



EXTENSION LADDER

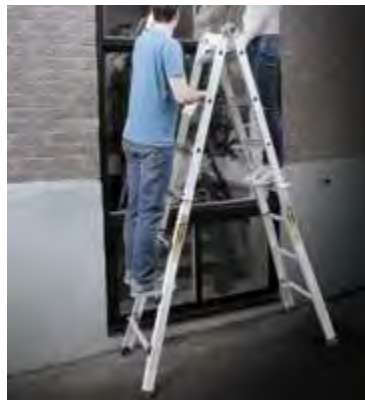

TWO-PERSON STEPLADDER



SCAFFOLD SUPPORTS

TELESCOPING WORK PLANK AND LADDER JACK


LADDERS, STEPLADDERS AND WORK PLATFORMS



INFO




DESCRIPTION	9' TELESCOPING WORK PLANK	13' TELESCOPING WORK PLANK	17' TELESCOPING WORK PLANK
CLOSED DIMENSIONS (WXDXH)	72 X 12 X 2 IN. (183.2 X 30.2 X 5 CM)	96 X 12 X 2 IN. (244.2 X 30.2 X 5 CM)	120 X 12 X 2 IN. (305.2 X 30.2 X 5 CM)
OPEN DIMENSIONS (WXDXH)	107.75 X 12 X 2 IN. (273.8 X 30.2 X 5 CM)	156 X 12 X 2 IN. (396 X 30.2 X 5 CM)	204 X 12 X 2 IN. (518 X 30.2 X 5 CM)
EXTEND	6 UP TO 9 FT (1.8 UP TO 2.7 M)	8 UP TO 13 FT (2.4 UP TO 4 M)	10 UP TO 17 FT (3 UP TO 5.2 M)
LOAD CAPACITY	250 LB (113 KG)	250 LB (113 KG)	250 LB (113 KG)
WEIGHT	31.1 LB (14.1 KG)	41 LB (18.6 KG)	50.7 LB (23 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM
STANDARD	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	M-PEP7000AL	M-PEP7100AL	M-PEP7200AL
UPC	778300000241	778300000258	778300000265

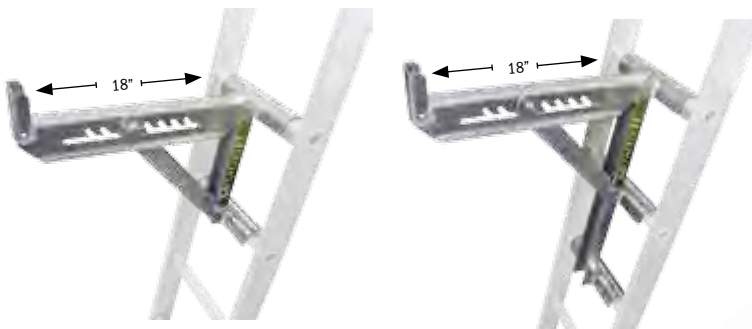

INFO



DESCRIPTION	2 RUNGS LADDER JACK (18 IN.)	3 RUNGS LADDER JACK (18 IN.)
DIMENSIONS (WXDXH)	21.75 X 10 X 16.75 IN. (55.3 X 25.4 X 42.6 CM)	21.75 X 10 X 29 IN. (55.3 X 25.4 X 73.7 CM)
QTY PER BOX	2	2
LOAD CAPACITY	250 LB	250 LB
ADJUSTABLE	8 NOTCHES OF ANGLE ADJUSTMENT	8 NOTCHES OF ANGLE ADJUSTMENT
WEIGHT	12 LB	15 LB
FINISH	ALUMINUM	ALUMINUM
STANDARDS	ANSI, CSA AND OSHA	ANSI, CSA AND OSHA
MODEL	E-LJ20P	E-LJ30P
UPC	778300000005	778300000067



STEPLADDERS

LADDERS, STEPLADDERS AND WORK PLATFORMS



DIRECT
CONTAINER
ORDER ONLY



DIRECT
CONTAINER
ORDER ONLY

DESCRIPTION	ULTRA-LIGHT 2 STEPS*	ULTRA-LIGHT 3 STEPS*
OPEN DIMENSIONS (W X D X H)	17.5 X 17.75 X 35.25 IN. (44.5 X 45.1 X 89.5 CM)	18.75 X 24 X 44.5 IN. (47.6 X 61 X 113 CM)
CLOSED DIMENSIONS	ONLY 2 IN. (5 CM) THICK WHEN CLOSED	ONLY 2 IN. (5 CM) THICK WHEN CLOSED
WEIGHT	5.1 LB (2.3 KG)	6.8 LB (3.1 KG)
LOAD CAPACITY	200 LB (90.7 KG)	200 LB (90.7 KG)
HIGHEST STANDING LEVEL	19 IN. (48.3 CM)	28.75 IN. (73 CM)
STEPS	2 WITH ANTI-SLIP GROOVES	3 WITH ANTI-SLIP GROOVES
MATERIAL	AIRCRAFT GRADE ALUMINUM, STEEL AND ABS	AIRCRAFT GRADE ALUMINUM, STEEL AND ABS
STANDARDS	ANSI TYPE III AND CSA GRADE 3	ANSI TYPE III AND CSA GRADE 3
4 UNITS SHIPPING BOX	40.2 X 50.8 X 114.3 IN. (102 X 20 X 45 CM)	51.2 X 7.7 X 20.1 IN. (130.1 X 19.6 X 51.1 CM)
MODEL	E-SLA2RD	E-SLA3RD
UPC	778300730001	778300000432

*Direct container order only

*Direct container order only

INFO

- » Foam handle for a comfortable firm grip
- » Sturdy structure with incredible lightness, made of aircraft grade aluminum, steel and ABS
- » Designed to be folded up without difficulty and easily stored against a wall or behind a door
- » Thickness is only 2 inches when closed

**CUSTOM
COLORS
AVAILABLE**



DIRECT
CONTAINER
ORDER ONLY

DESCRIPTION	1 STEP*
OPEN DIMENSIONS (W X D X H)	18.75 X 16.75 X 19 IN. (47.6 X 42.5 X 48.3 CM)
CLOSED DIMENSIONS (W X D X H)	18.75 X 3.75 X 23.5 IN. (47.6 X 9.5 X 59.7 CM)
HIGHEST STANDING LEVEL	10 IN. (25.4 CM)
STEP	1 ANTI-SLIP RUBBER COATED
LOAD CAPACITY	225 LB (102 KG)
WEIGHT	7.2 LB (3.3 KG)
MATERIAL	STEEL
STANDARDS	ANSI TYPE III AND CSA GRADE 3
MODEL	E-SLS1BK
UPC	778300000494

*Direct container order only

STEPLADDERS AND PORTABLE WORK PLATFORM



**DIRECT
CONTAINER
ORDER ONLY**



2 IN 1

**DIRECT
CONTAINER
ORDER ONLY**

DESCRIPTION	FOLDING STEPLADDER WITH UTILITY TRAY*	DESCRIPTION	HAND TRUCK AND FOLDING STEPLADDER*
OPEN DIMENSIONS (W X D X H)	18.5 X 36.5 X 50.75 IN. (47 X 92.7 X 128.9 CM)	OPEN DIMENSIONS (W X D X H)	17.75 X 25.5 X 51.5 IN. (45.1 X 64.8 X 130.8 CM)
CLOSED DIMENSIONS	ONLY 2.65 IN. (6.7 CM) THICK WHEN CLOSED	CLOSED DIMENSIONS	ONLY 3.5 IN. (8.9 CM) THICK WHEN CLOSED
WEIGHT	18 LB (8.16 KG)	WEIGHT	25 LB (11.3 KG)
STEPLADDER WORKING LOAD	200 LB (90.7 KG)	STEPLADDER WORKING LOAD	200 LB (90.7 KG)
TRAY WORKING LOAD	20 LB (9.1 KG)	HAND TRUCK WORKING LOAD	120 LB (54.4 KG)
HIGHEST STANDING LEVEL	28.75 IN. (73 CM)	TRAY WORKING LOAD	20 LB (9.1 KG)
STEPS	3 ANTI-SLIP RUBBER COATED	HIGHEST STANDING LEVEL	27.75 IN. (70 CM)
MATERIAL	STEEL AND ABS	STEPS	3 ANTI-SLIP RUBBER COATED
STANDARDS	ANSI TYPE III AND CSA GRADE 3	CASTERS	6 IN. (15.3 CM)
MODEL	E-SLT3RD	MATERIAL	STEEL AND ABS
UPC	778300730025	STANDARDS	ANSI TYPE III AND CSA GRADE 3
		MODEL	E-LADDERCARTYW

*Direct container order only


*Direct container order only



ADJUSTABLE HEIGHT

DESCRIPTION	30" PORTABLE WORK PLATFORM	39" PORTABLE WORK PLATFORM	30" ADJUSTABLE WORK PLATFORM
OPEN DIMENSIONS (W X D X H)	42.75 X 15.75 X 19.5 IN. (108.6 X 40 X 49.5 CM)	52.25 X 15.5 X 20.25 IN. (132.7 X 39.4 X 51.4 CM)	51 X 22.25 X 35 IN. (129.5 X 56.5 X 88.9 CM)
CLOSED DIMENSIONS (W X D X H)	31.25 X 15.75 X 6.5 IN. (79.4 X 40 X 16.5 CM)	39.75 X 15.5 X 5.75 IN. (101 X 39.4 X 14.6 CM)	35 X 19 X 7 IN. (88.9 X 48.3 X 17.8 CM)
DECK DIMENSIONS (W X D)	30.25 X 11.75 IN. (76.8 X 29.8 CM)	39 X 11.75 IN. (99.1 X 29.8 CM)	30.75 X 11.75 IN. (78.1 X 29.8 CM)
LOAD CAPACITY	225 LB (102 KG)	225 LB (102 KG)	300 LB (136 KG)
WEIGHT	10.2 LB (4.6 KG)	11.4 LB (5.2 KG)	15 LB (6.8 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM
MODEL	E-PWP7000AL	E-PWP7100AL	E-PWP7101AL
UPC	778300401505	778300000418	778300000425

LADDERS, STEPLADDERS AND WORK PLATFORMS



GET THE METALTECH APP



TEMPORARY FENCES

Metaltech's innovative temporary fence & barrier systems are designed with maximum security features and minimum installation cost. Seasonal outdoor businesses, construction sites or special public events deserve to be protected by the most transparent and aesthetically pleasing temporary fences and barriers on the market today.

Made of all-weather and maintenance free galvanized steel components, Metaltech's fences and barriers, offer competitive pricing and superior site protection over chain link, wood or plastic systems.

- **INSTALLS TWICE AS FAST WITH HALF THE STAFF!**
- **DESIGNED FOR JOB SITES SECURITY**
- **ONE MAN INSTALLATION**
- **MAINTENANCE-FREE GALVANIZED STEEL PANELS**



TEMPORARY FENCES

**BUILT TOUGH FOR
SAFETY**

METALTECH

CROWD & TRAFFIC CONTROL

TEMPORARY FENCES



2" X 6"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH


DESCRIPTION	42" SECURIGARD
DIMENSIONS (H X W)	42 X 86 IN.
WEIGHT	36 LB (16.3 KG)
GAUGE	6
MESH OPENING	2 X 6 IN.
FINISH	GALVANIZED
OPTION	3 IN. BASE FOR INTERIOR, TOEBOARD
QTY/PALLET	30
WEIGHT/PALLET	1,410 LB (640 KG)
MODEL	CT-SECARDGV
UPC	778300084432



3/8"
MESH OPENING

GALVANIZED
FINISH

DESCRIPTION	42" SECURICROWD
DIMENSIONS (H X W)	42 X 101 IN.
WEIGHT	58.9 LB (26.7 KG)
TUBE	0.5 IN.
TUBES SPACING	3.875 IN.
FINISH	GALVANIZED
QTY/PALLET	30
WEIGHT/PALLET	2,065 LB (937 KG)
MODEL	CT-SECCTYGV

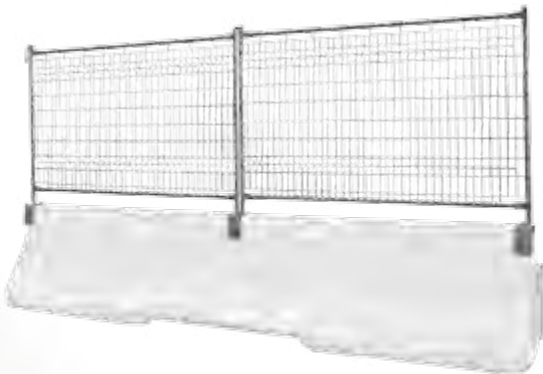

2" X 4 7/8"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH

DESCRIPTION	PANEL FOR CONCRETE JERSEY
DIMENSIONS (H X W)	52 X 76 IN.
WEIGHT	33.5 LB (15.2 KG)
FINISH	GALVANIZED
MODEL	CT-TFP5276PLUSHS

INFO



CUSTOMIZE IT!

- ✓ PROMOTE YOUR COMPANY WITH A PERSONALIZED NAMEPLATE*
- ✓ INCREASE YOUR VISIBILITY WITH COLORFUL FENCES

OPTIONAL COLORS:



* The identification plates are only sold with a minimum order. Please check with our customer service to get our great rates!

JOB SITES SECURITY

ADVICE


Add 5/8" per fence panel length to calculate the required linear feet



2" X 6"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH

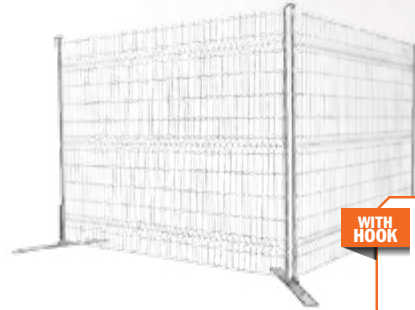



DESCRIPTION	DIMENSIONS (H X W)	WEIGHT	MODELS	QTY/PALLET	WEIGHT/PALLET
6' PROTEC SAFERSTACK	71 X 90 5/16 IN.	46 LB (20.9 KG)	CT-TFP7296S	60	3,608 LB (1,637 KG)
6' PROTEC SAFERSTACK WITH HOOK	71 X 90 5/16 IN.	47 LB (21.3 KG)	CT-TFP7296HS	60	3,668 LB (1,664 KG)
8' PROTEC SAFERSTACK	98 X 90 5/16 IN.	63.5 LB (28.8 KG)	CT-TFP9696S	45	3,473 LB (1,575 KG)
8' PROTEC SAFERSTACK WITH HOOK	98 X 90 5/16 IN.	64.5 LB (29.3 KG)	CT-TFP9696HS	45	3,518 LB (1,596 KG)



2" X 4 7/8"
MESH OPENING

6
GAUGE

GALVANIZED
FINISH

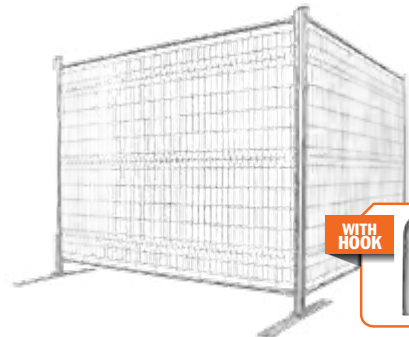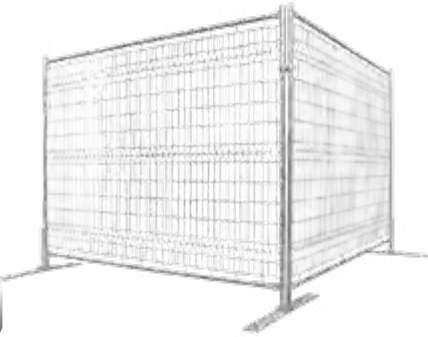

DESCRIPTION	DIMENSIONS (H X W)	WEIGHT	MODELS	QTY/PALLET	WEIGHT/PALLET
6'4" PROTEC PLUS SAFERSTACK	76 X 90 5/16 IN.	54 LB (24.5 KG)	CT-TFP7696PLUSS	50	3,418 LB (1,550 KG)
6'4" PROTEC PLUS SAFERSTACK WITH HOOK	76 X 90 5/16 IN.	55 LB (25 KG)	CT-TFP7696PLUSHS	50	3,468 LB (1,573 KG)
8'6" PROTEC PLUS	103 X 90 5/16 IN.	80 LB (36.3 KG)	CT-TFP10396PLUSS	28	2,578 LB (1,169 KG)
8'6" PROTEC PLUS WITH HOOK	103 X 90 5/16 IN.	78 LB (35.4 KG)	CT-TFP10396PLUSHS	28	2,606 LB (1,182 KG)

DIRECT
CONTAINER
ORDER ONLY




2" X 4"
MESH OPENING

10
GAUGE

6' PROTEC SQUARE*			8' PROTEC SQUARE*		
DIMENSIONS (H X W)	72 X 114 1/4 IN.	DIMENSIONS (H X W)	96 X 114 1/4 IN.		
WEIGHT	65 LB (29.3 KG)	WEIGHT	80 LB (36.3 KG)		
MODEL	FINISH	QTY/CONTAINER	MODEL	FINISH	QTY/CONTAINER
CT-TFP72120SQ	POWDER COATED	400	CT-TFP96120SQ	POWDER COATED	320
CT-TFP72120SQZN	ZINC PLATED	400	CT-TFP96120SQZN	ZINC PLATED	320
CT-TFP72120SQZNSP	ZINC PLATED + POWDER COATED	400	CT-TFP96120SQZNSP	ZINC PLATED + POWDER COATED	320
CT-TFP72120SQGV	GALVANIZED	400	CT-TFP96120SQGV	GALVANIZED	320
CT-TFP72120SQGVSP	GALVANIZED + POWDER COATED	400	CT-TFP96120SQGVSP	GALVANIZED + POWDER COATED	320

*Direct container order only



TEMPORARY FENCES

FENCE ACCESSORIES

TEMPORARY FENCES



P



G



G



G

DESCRIPTION	PEDESTRIAN ACCESS GATE	ACCESS GATE BASE	ACCESS GATE TOP ARCH	ACCESS GATE IDENTIFICATION
COMPATIBLE	PROTEC & PROTEC PLUS	PEDESTRIAN ACCESS GATE	PEDESTRIAN ACCESS GATE	ACCESS GATE TOP ARCH
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	N/A
WEIGHT	49 LB (22 KG)	32 LB (14.5 KG)	17 LB (7.7 KG)	0.25 LB (0.1 KG)
MODEL	CT-TAGK	CT-TAGB	CT-TAGT	ETI-TAGTL
UPC	778300094554	N/A	778300000159	N/A



P



P




P



P

DESCRIPTION	FENCE STABILIZER	DOUBLE CLAMP	GATE HINGE KIT	GATE LATCH AND FINGER KIT
COMPATIBLE	PROTEC & PROTEC PLUS	PROTEC & PROTEC PLUS	PROTEC & PROTEC PLUS	PROTEC & PROTEC PLUS
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
WEIGHT	5.3 LB (2.4 KG)	0.75 LB (0.3 KG)	4.24 LB (1.9 KG)	2 LB (0.9 KG)
MODEL	CT-STABILGV	CT-TFDCGK	CT-TFHG	CT-TFLGF
UPC	778300000180	778300000128	778300000135	778300000142

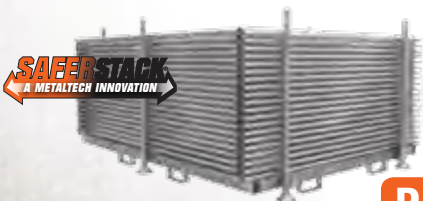

P



P

DESCRIPTION	TRANSPORT & STORAGE SYSTEM	PRIVACY FENCE NETTING (90% SHADE)						
		DIMENSIONS	PACKAGE	COLOR	WEIGHT	COMPATIBLE	MODEL	UPC
COMPATIBLE	PROTEC & PROTEC PLUS	72 IN. X 150 FT	72 X 10 IN.	BLACK	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6BK	778300084456
INFO	FOR 6 X 8 FT PANELS	72 IN. X 150 FT	72 X 10 IN.	GREEN	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6GN	778300084463
FINISH	POWDER COATED	72 IN. X 150 FT	72 X 10 IN.	BLUE	37 LB	6' PROTEC & PROTEC PLUS	CT-TFNET6BL	778300084401
WEIGHT	253 LB (115 KG)	96 IN. X 150 FT	96 X 10 IN.	BLACK	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8BK	778300084470
MODEL	CT-SAFERRACK	96 IN. X 150 FT	96 X 10 IN.	GREEN	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8GN	778300084487
UPC	778300094547	96 IN. X 150 FT	96 X 10 IN.	BLUE	45 LB	8' PROTEC & PROTEC PLUS	CT-TFNET8BL	778300084494

COMPATIBILITY

- P** PROTEC & PROTEC PLUS
- PS** PROTEC SQUARE
- S** SECURIGARD
- SC** SECURICROWD
- G** ACCESS GATE
- J** PANEL FOR CONCRETE JERSEY




P J



P S



S



S

DESCRIPTION	IDENTIFICATION PLATE*	REINFORCED BASE PLATE	FIXED SQUARE BASE PLATE	TOEBOARD
COMPATIBLE	PROTEC, PROTEC PLUS & JERSEY	PROTEC, PROTEC PLUS & SECURIGARD	SECURIGARD	SECURIGARD
DIMENSIONS	8.25 X 4.25 IN. (FOLDED)	34 X 3.5 X 14 IN.	6 X 6 X 4 IN.	85 X 7 IN.
FINISH	N/A	GALVANIZED	GALVANIZED	GALVANIZED
WEIGHT	N/A	11 LB (5 KG)	2.7 LB (1.2 KG)	10 LB (4.5 KG)
MODEL	CT-PLAQUEIDGEN	CT-TFBPG	CT-SECBPFGV	CT-SGTBGV
UPC	N/A	778300000111	778300084449	N/A

* The identification plates are only sold with a minimum order. Please check with our customer service to get our great rates!



SC



SC



J



J

DESCRIPTION	BASE PLATE (HOOK SIDE)	BASE PLATE (RECEIVER SIDE)	SIDE FENCE BASE	MIDDLE FENCE BASE
COMPATIBLE	SECURICROWD	SECURICROWD	PANEL FOR CONCRETE JERSEY	PANEL FOR CONCRETE JERSEY
FINISH	GALVANIZED	GALVANIZED	GALVANIZED	GALVANIZED
WEIGHT	4.7 LB (2.1 KG)	3.2 LB (1.5 KG)	2.9 LB (1.3 KG)	3.2 LB (1.5 KG)
MODEL	CT-TFBPCTYHGV	CT-TFBPCTYRGV	CT-TFPJSEBP	CT-TFPJSMBP



J



PS



PS

DESCRIPTION	FENCE CONNECTION	DESCRIPTION	BASE PLATE	DESCRIPTION	U-SHAPE COUPLER
COMPATIBLE	PANEL FOR CONCRETE JERSEY	COMPATIBLE	PROTEC SQUARE	COMPATIBLE	PROTEC SQUARE
FINISH	GALVANIZED	WEIGHT	11 LB (5 KG)	WEIGHT	0.75 LB (0.3 KG)
WEIGHT	2.7 LB (1.2 KG)	FINISH	POWDER COATED	FINISH	POWDER COATED
MODEL	CT-TFPJSC	MODEL	CT-TFBPSQ	MODEL	CT-UCOUPERSQ
			ZINC PLATED		CT-UCOUPERSQZN
			GALVANIZED		CT-UCOUPLESQGV
					CT-UCOUPERSQZNSP
					CT-UCOUPLESQGVSP

TEMPORARY FENCES



GET THE METALTECH APP



EXTERIOR SCAFFOLDING VIEW

VISUALIZATION OF THE COMPONENTS LOCATION
OF A BASIC SCAFFOLDING STRUCTURE.



COUPLING PIN · P.7



FRAME · P.8-11



FRAME LOCKS · P.7



BASE PLATE · P.15




LEVELING JACK · P.15



CASTER · P.15




EXTERIOR SCAFFOLDING - VIEW

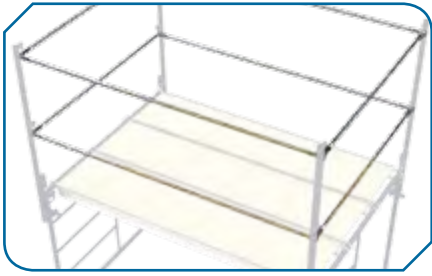

GUARDRAIL · P.14



GUARDRAIL POST · P.14

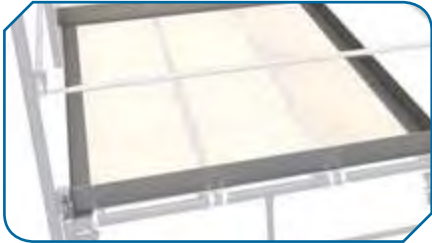

TOEBOARD · P.14



PLATFORM · P.17



WALL ATTACHMENT · P.12



LOCK ARM · P.12



PIG TAIL · P.13



OUTRIGGER · P.15



DIAGONAL BRACE · P.12




CROSS BRACE · P.12

EXTERIOR SCAFFOLDING - VIEW

EXTERIOR SCAFFOLDING SET UP INSTRUCTIONS

Scaffolding should be erected by at least two people. One person should be knowledgeable in erecting scaffolding to supervise the work. These step-by-step instructions are only a general guide. The following example is based on building a scaffolding that is 7 x 5 ft. by 1 frame high.

1



Select and prepare the ground area. Place suitable sills and make sure there are no holes under the sills. Select the equipment you need and place it near the work area. Put the adjustable leveling jack plates on the sills in the location that matches your scaffold dimensions. Do not secure the bases to the sills at this step.

2



Adjust the nuts of the leveling jack, starting at the highest point of the ground level. The nuts at the highest ground level should be set to 3-6 inches from the top of the sill, depending on the slope. Place the first frame onto the base at the highest point. Connect the first cross brace to the frame. Allow the frame to lean slightly forward and rest on the sill while you prepare for the next frame to be installed.

3



Install the second frame onto the leveling jack. Secure the first cross brace to the second frame.

4



Install the second cross brace to both frames. Next, you need to level and plumb the scaffolding. Start at the highest point of the scaffolding. If possible, use the leveling jack to bring the highest corner down closer to the sill. Next, bring all four corners up to that point. If the bottom cross braces of each frame are level with each other, then frames should also be plumb. Install the diagonal brace to keep the scaffolding square. Check the level again and plumb if necessary. Fasten the leveling jack to the sills with either nails or screws.

5



Install the deck, which may be an all aluminium platform or with wood deck or scaffold planks. If using wooden planks, they must extend beyond the supporting points at least 6 inches but not more than 12 inches. Secure the deck so it cannot move.

6



Install the guardrail posts onto the coupling pins seated in the top of the frames. Put a pig tail lock through the top and bottom of each coupling pin to avoid any separation.

7



Attach the guardrails to the posts on all the exposed sides.

8



Install toeboards as required. The gap between the bottom of the toeboard and the top of the platform must not be more than 1/2 inches.



EXTERIOR SCAFFOLDING SAFETY GUIDELINES

THE PRODUCT OR ASSEMBLY VARIANTS SHOWN IN THESE INSTRUCTIONS FOR ASSEMBLY AND USE MAY BE SUBJECT TO LOCAL REGULATIONS. THE PRODUCT USER BEARS THE RESPONSIBILITY FOR COMPLIANCE WITH SUCH REGULATIONS, IF THERE IS A CONFLICT BETWEEN THIS GUIDELINES AND THE LOCAL REGULATIONS, LOCAL REGULATIONS SHALL SUPERSEDE THESE GUIDELINES.

REQUIREMENTS FOR ACCESS FRAME SCAFFOLDING

- A scaffold must be erected, altered, and dismantled by qualified workers or under the direct supervision of a qualified person. The qualified person must ensure that the erection is carried out properly, and that the correct components and materials are being used. All equipment must be inspected before use to ensure that it is in good repair and suitable for the intended use.
- The base must be firm and level enough to support the load of scaffolding, workers, and materials. Sills and base plates are required on any soil or unstable ground condition, or where any leveling adjustment is needed. The sill must be sound, rigid, and capable of supporting the maximum loads without settlement or deformation.
- Leveling jack base must be adjusted within the limits specified by the local regulation.
- The frames must be plumb and level and spaced to adequately support the loads.
- If uplift could cause the components to separate, locking pins must be used and the components secured. Uplift might be caused by the action of wind on a secured deck or by the leverage action of a cantilever side bracket on the scaffolding. All joints must be pinned on rolling scaffoldings and free-standing towers.
- With a rolling scaffolding or free-standing tower, the platform height must not exceed three times its smallest base dimension (3 to 1 rule).
- A scaffolding built above the 3 to 1 rule must be effectively guyed or secured to a building or structure to prevent overturning. The guying of a scaffolding may require the direction of a professional engineer.
- Guardrails must be installed on all open sides of the platform where a person could fall a distance of 10 ft. or more. The top rail must be placed 40-44 in. above the work surface. An intermediate rail must be placed halfway between the top rail and the toeboard, if one is provided, or halfway between the top rail and the work surface if no toeboard is provided.

- Toeboards must be installed on all the open sides of a platform where it is possible for tools and or materials to roll off. The top of the toeboard must be at least 4 in. above the platform. If loose materials are to be stacked above the height of the toeboard, then the toeboard must be increased in height or mesh panels must be installed to prevent materials from falling off the scaffolding.

BEFORE ERECTING ACCESS FRAME SCAFFOLDING

- What will the scaffolding be used for? For example, light duty (one or two workers; painting a wall), or heavy duty (several tradespersons, with large and heavy materials on the platform)?
- How high will the scaffolding be? Will it be erected in one operation or as the work progresses?
- Is the ground firm? Can it support the loads from the scaffolding, workers, and materials on it?
- Will the scaffolding need to be tied in? How will this be done? Will the ties be moved as the work progresses?
- Is the scaffolding likely to be covered or enclosed as a protection against the elements? Is there provision for adding additional ties to the adjoining structure?
- What will be the method of access and egress? For example, a sloping ladder, vertical ladder, built-in stairway, or direct from the floors of the building structure?
- On a multi-level scaffolding, how many levels will be loaded with materials at one time? Will an engineer be required to make the calculations for the total anticipated loading and possibly design the scaffolding and the sills?
- If a rolling scaffolding is required, consider ground surface, height restriction (3 to 1 rule) hazards when moving (such as power lines, projections from the building, and potholes).

EQUIPMENT INSPECTION

YOU MUST INSPECT THE EQUIPMENT YOU PLAN TO USE TO MAKE SURE THAT IT IS IN GOOD REPAIR AND SUITABLE FOR THE JOB. CHECK THE FOLLOWING:

- Sills: suitable size and strength for the loads. Not split or rotten.
- Frames: no cracks in the welded joints. No kinks or dents in the top or bottom cross-members. Legs plumb and square with the cross-members. Brace locks in good working order. Coupling pins in place and secured to the frame.
- Cross braces and diagonal braces: straight with no bent ends. Pivot connection in good working order. No excessive rust.
- Scaffold planks: no split ends, saw cuts, notches, protruding nails, excessive warping. No contamination that may affect the integrity of the plank, such as oil, chemicals, and burns. (If you have any doubts about the strength of the plank, you may need to have it load-tested).
- All aluminium or with plywood deck platforms: not mis-shaped or cracked. Locks working. All bolts and screws in place. No burns or broken ends. If upper surface has non-skid coating, no rot or plywood separation on underside.
- Side or end brackets: hook-on attachment not distorted. No cracks in welds. No dents, kinks, or any signs of abuse.
- Guardrails: straight, with no kinks, dents, or excessive rust.
- Casters: same size and from same manufacturer. Wheel rotates well and the swivel below the stem is working. Brake mechanism works properly. Wheel tread has no damage.
- Leveling jacks: no cracks in weld where leveling jack is attached to the top of the caster. No thread damage. No curling or warping of the base plate. Adjusting nut is a tight fit.
- Other equipment: inspect any other equipment in the frame structure. Damaged equipment should be tagged and marked as not fit for use. Inform the supervisor so that others do not use it.



REPLACEMENT PARTS

REPLACEMENT PARTS



JOBSITE SERIES™ 6' BAKER™

I-CISC PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS5	ONE 5" CASTER WITH LOCKING PIN	I-CAS5PIN	LOCKING PIN
I-C4CAS5	FOUR 5" CASTERS WITH LOCKING PINS	I-CISP	PLATFORM



JOBSITE SERIES™ 6' BAKER™ (TRAP DOOR)

I-CISCTP PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS5	ONE 5" CASTER WITH LOCKING PIN	I-CAS5PIN	LOCKING PIN
I-C4CAS5	FOUR 5" CASTERS WITH LOCKING PINS	I-CISCTP001	PLATFORM WITH TRAP DOOR



JOBSITE SERIES™ PERRY STYLE™

I-CISCPY PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS5PY	ONE 5" CASTER WITH LOCKING PIN	I-CAS5PIN	LOCKING PIN
I-C4CAS5PY	FOUR 5" CASTERS WITH LOCKING PINS	I-CISCPYP	PLATFORM



JOBSITE SERIES™ 6'

I-IRC PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-ICW5	ONE 5" CASTER WITH LOCKING PIN	I-I4CAS5	FOUR 5" CASTERS. 3/4 THREAD
I-I4CW5	FOUR 5" CASTERS WITH LOCKING PINS	I-IRP	PLATFORM
I-I1CAS5	ONE 5" CASTER. 3/4 THREAD	I-IRPP	PLATFORM ANTI-SLIP INSERTS



JOBSITE SERIES™ 5'

I-IMIS PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-ICW5	ONE 5" CASTER WITH LOCKING PIN	I-IMIAPA	STEP BAR
I-I4CW5	FOUR 5" CASTERS WITH LOCKING PINS	I-IMPPN	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN	I-IMIGRA	SAFETY RAIL
I-IMIPA	PLATFORM		



JOBSITE SERIES™ 4' DELUXE

I-IMCNDX PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMAPN	STEP BAR
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMCHOOK	UTILITY HOOK
I-CAS4PIN	LOCKING PIN	I-IMPPN	PLATFORM ANTI-SLIP INSERTS
I-IMPV	PLATFORM	I-IMCGR	SAFETY RAIL



JOBSITE SERIES™ 4'

I-IMCNT PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMPV	PLATFORM
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMPPN	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN	I-IMCGR	SAFETY RAIL



4' HIGH PORTABLE SCAFFOLD

I-IMCN PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMPV	PLATFORM
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMPPN	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN		



ALU SERIES™ 6' BAKER™

I-CAISC PARTS		I-CAS5PIN	
CODE	DESCRIPTION	CODE	DESCRIPTION
I-11CAS5SALU	ONE 5" CASTER WITH LOCKING PIN	I-CAS5PIN	LOCKING PIN
I-14CAS5SALU	FOUR 5" CASTERS WITH LOCKING PINS		



ALU SERIES™ 6'

I-CAIRC PARTS		I-IMPMPA	
CODE	DESCRIPTION	CODE	DESCRIPTION
I-11CAS5RALU	ONE 5" CASTER WITH LOCKING PIN	I-CAIRP	PLATFORM
I-14CAS5RALU	FOUR 5" CASTERS WITH LOCKING PINS	I-IMPMPA	PLATFORM ANTI-SLIP INSERTS
I-CAS5PIN	LOCKING PIN		



ALU SERIES™ 4'

I-IMAC PARTS		I-IMPMPA	
CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS4	ONE 4" CASTER WITH LOCKING PIN	I-IMPALU	PLATFORM
I-C4CAS4	FOUR 4" CASTERS WITH LOCKING PINS	I-IMPMPA	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN		



BUILDMAN™ 6' BAKER™

I-BMSS PARTS		I-BMSSP	
CODE	DESCRIPTION	CODE	DESCRIPTION
I-C1CAS6	ONE 6" CASTER WITH LOCKING PIN	I-CAS5PIN	LOCKING PIN
I-C4CAS6	FOUR 6" CASTERS WITH LOCKING PINS	I-BMSSP	PLATFORM



BUILDMAN™ 6'

I-BM6S PARTS		I-IMPMPN	
CODE	DESCRIPTION	CODE	DESCRIPTION
I-1CW5RD	ONE 5" CASTER WITH LOCKING PIN	I-BM6P	PLATFORM OF 8.75"
I-14CW5RD	FOUR 5" CASTERS WITH LOCKING PINS	I-BM6SP	PLATFORM OF 6.5"
I-CAS5PIN	LOCKING PIN	I-IMPMPN	PLATFORM ANTI-SLIP INSERTS




BUILDMAN™ 4'

I-BM4S PARTS		I-BM4GR	
CODE	DESCRIPTION	CODE	DESCRIPTION
I-1CW5RD	ONE 5" CASTER WITH LOCKING PIN	I-BM4P	PLATFORM
I-14CW5RD	FOUR 5" CASTERS WITH LOCKING PINS	I-IMPMPN	PLATFORM ANTI-SLIP INSERTS
I-CAS4PIN	LOCKING PIN	I-BM4GR	SAFETY RAIL



WALL HAULER™ SERIES 2000, 3000 AND 3006 DRYWALL CART

I-BMD3631 / I-BMD3031 / I-BMD3131 / I-BMD2131 / I-BMD2031 PARTS	
CODE	DESCRIPTION
I-DCC8KPL	KINGPINLESS CASTER FRAME FOR 8" CASTER
I-DCCDL	DIRECTIONAL LOCK FOR CASTER
I-DCCWL	CASTER BRAKE
M-MLS	SPRING-LOCK (I-BMD3631)
I-DCC8P	ONE PHENOLIC 8" CASTER
I-DCC8P4	FOUR PHENOLIC 8" CASTERS
I-DCC8R	ONE POLYURETHANE 8" CASTER ON POLYPROPYLENE CORE
I-DCC8R4	FOUR POLYURETHANE 8" CASTERS ON POLYPROPYLENE CORE
I-DCC8YGR	ONE YELLOW POLYURETHANE 8" CASTER ON POLYPROPYLENE CORE
I-DCC8YGR4	FOUR YELLOW POLYURETHANE 8" CASTERS ON POLYPROPYLENE CORE



INDEX

AL-A0000.....	55	AL-Q0105.....	56	CT-UCOUPERSQ.....	77	F-TBBRACK.....	60
AL-A0001.....	55	AL-Q0106.....	56	CT-UCOUPERSQZN.....	77	I-BM4GR.....	83
AL-B0001.....	55	AL-Q0107.....	57	CT-UCOUPERSQZNSP.....	77	I-BM4P.....	83
AL-B0002.....	55	AL-Q0108.....	57	CT-UCOUPLESQGV.....	77	I-BM4S.....	44
AL-B0003.....	55	AL-Q3000.....	54	CT-UCOUPLESQGVSP.....	77	I-BM6C4.....	43
AL-C0000.....	55	AL-Q3001.....	54	E-LAD12T2.....	66	I-BM6GR.....	43
AL-C0002.....	55	AL-Q3004.....	54	E-LAD15T1.....	67	I-BM604.....	43
AL-D0001.....	55	AL-Q3101.....	55	E-LADDERCARTYW.....	71	I-BM6P.....	83
AL-D0002.....	55	AL-T0100.....	55	E-LJ20P.....	69	I-BM6S.....	42
AL-D0003.....	55	AL-T0101.....	55	E-LJ30P.....	69	I-BM6SK.....	43
AL-F3000.....	54	AL-T0102.....	55	E-MTL7000AL.....	68	I-BM6SP.....	83
AL-F3001.....	54	AL-T0103.....	55	E-MTL7100AL.....	68	I-BMD2031P.....	49
AL-F3002.....	54	C-MART.....	21	E-MTL7200AL.....	68	I-BMD2031PK.....	49
AL-F3003.....	54	CT-PLAQUEIDGEN.....	77	E-MTL7300AL.....	68	I-BMD2031R.....	49
AL-F4000.....	54	CT-SAFERRACK.....	76	E-PWP7000AL.....	71	I-BMD2031RK.....	49
AL-F4001.....	54	CT-SECBPFGV.....	77	E-PWP7100AL.....	71	I-BMD2131YGR.....	48
AL-F4002.....	54	CT-SECCTYGV.....	74	E-PWP7101AL.....	71	I-BMD3031P.....	46
AL-F4003.....	54	CT-SECGARDGV.....	74	E-SLA2RD.....	70	I-BMD3031PK.....	46
AL-F4004.....	54	CT-SGTBGV.....	77	E-SLA3RD.....	70	I-BMD3031R.....	46
AL-F4005.....	54	CT-STABILGV.....	76	E-SLS1BK.....	70	I-BMD3031RK.....	46
AL-F4101.....	54	CT-TAGB.....	76	E-SLT3RD.....	71	I-BMD3131YGR.....	47
AL-F4103.....	54	CT-TAGK.....	76	ETI-TAGTL.....	76	I-BMD3631P.....	45
AL-G3000.....	54	CT-TAGT.....	76	F-ADJ200.....	61	I-BMD3631PK.....	45
AL-G3001.....	54	CT-TFBPCTYHGV.....	77	F-BRAD24.....	61	I-BMD3631R.....	45
AL-G3002.....	54	CT-TFBPCTYRGV.....	77	F-BRAH24.....	61	I-BMD3631RK.....	45
AL-G3003.....	54	CT-TFBPG.....	77	F-DH24.....	61	I-BMDS.....	45,46,47
AL-G4000.....	54	CT-TFBPSQ.....	77	F-DP24.....	61	I-BMS04.....	41
AL-G4001.....	54	CT-TFBPSQGV.....	77	F-FRA0710L.....	60	I-BMSGR.....	41
AL-G4100.....	54	CT-TFBPSQZN.....	77	F-FRA0715L.....	60	I-BMSS.....	40
AL-G4101.....	54	CT-TFDCGK.....	76	F-FRA1210L.....	60	I-BMSSEX.....	41
AL-G4102.....	54	CT-TFHG.....	76	F-FRA1215L.....	60	I-BMSSP.....	83
AL-J0001.....	55	CT-TFLGF.....	76	F-ISPC.....	63	I-C1CAS4.....	82,83
AL-J0002.....	55	CT-TFNET6BK.....	76	F-KIT0715.....	62	I-C1CAS5.....	82
AL-K3007.....	52	CT-TFNET6BL.....	76	F-KIT0720.....	62	I-C1CAS5PY.....	82
AL-K3013.....	52	CT-TFNET6GN.....	76	F-KIT0725.....	62	I-C1CAS6.....	83
AL-K3019.....	52	CT-TFNET8BK.....	76	F-KIT0730.....	62	I-C4CAS4.....	82,83
AL-K3028.....	52	CT-TFNET8BL.....	76	F-KIT0735.....	62	I-C4CAS5.....	82
AL-K3034.....	52	CT-TFNET8GN.....	76	F-KIT0740.....	62	I-C4CAS5PY.....	82
AL-K3040.....	52	CT-TFP5276PLUSHS.....	74	F-KIT0745.....	62	I-C4CAS5PYHD.....	27
AL-K3046.....	52	CT-TFP7296HS.....	75	F-KIT0750.....	62	I-C4CAS6.....	83
AL-K3052.....	52	CT-TFP7296S.....	75	F-KIT1215.....	62	I-CAIRC.....	36
AL-K4007.....	53	CT-TFP7696PLUSHS.....	75	F-KIT1220.....	62	I-CAIRP.....	83
AL-K4013.....	53	CT-TFP7696PLUSS.....	75	F-KIT1225.....	62	I-CAISO4.....	35
AL-K4019.....	53	CT-TFP9696HS.....	75	F-KIT1230.....	62	I-CAISC.....	34
AL-K4028.....	53	CT-TFP9696S.....	75	F-KIT1235.....	62	I-CAISCGR.....	35
AL-K4034.....	53	CT-TFP10396PLUSHS.....	75	F-KIT1240.....	62	I-CAS4PIN.....	82,83
AL-K4040.....	53	CT-TFP10396PLUSS.....	75	F-KIT1245.....	62	I-CAS5PIN.....	82,83
AL-K4046.....	53	CT-TFP72120SQ.....	75	F-KIT1250.....	62	I-CISC.....	24
AL-K4052.....	53	CT-TFP72120SQGV.....	75	F-KIT1255.....	62	I-CISCPT001.....	82
AL-L0002.....	54	CT-TFP72120SQGVSP.....	75	F-KIT1260.....	62	I-CISCPY.....	26
AL-O0000.....	55	CT-TFP72120SQZN.....	75	F-KIT1265.....	62	I-CISCPYGR.....	27
AL-O0001.....	55	CT-TFP72120SQZNSP.....	75	F-KIT1270.....	62	I-CISCYPY.....	82
AL-O0002.....	55	CT-TFP96120SQ.....	75	F-LAD2436.....	61	I-CISCTP.....	24
AL-P0001.....	55	CT-TFP96120SQGV.....	75	F-OUT20.....	61	I-CISGRJP.....	25
AL-P0002.....	55	CT-TFP96120SQGVSP.....	75	F-OUT30.....	61	I-CISO4.....	25
AL-P0003.....	55	CT-TFP96120SQZNSP.....	75	F-PBRA0724.....	61	I-CISO4PY.....	27
AL-P0100.....	55	CT-TFP96120SQZNSP.....	75	F-PBRA1224.....	61	I-CISO4TT.....	25,27,35
AL-P0101.....	55	CT-TFPJSC.....	77	F-TB07.....	60	I-CISP.....	82
AL-P0102.....	55	CT-TFPJSEBP.....	77	F-TB12.....	60	I-CISTR.....	25,27,35
AL-Q0100.....	56	CT-TFPJSMBP.....	77	F-TB24.....	60	I-DCC8KPL.....	83

I-DCC8P.....	83	M-FASTBOLT2.....	21	M-MF6060PS-A.....	8	M-MSJLOCKK.....	16
I-DCC8P4.....	83	M-MA7642GVPS.....	10	M-MF7260PS.....	9	M-MSJRACK.....	16
I-DCC8R.....	83	M-MA7642PS.....	10	M-MF7660PS.....	9	M-MST760.....	18
I-DCC8R4.....	83	M-MA7660GVPS.....	10	M-MFL7715.....	8	M-MST760IR.....	18
I-DCC8YGR.....	83	M-MA7660LGVPS.....	11	M-MFLBR.....	8	M-MST760RDE.....	18
I-DCC8YGR4.....	83	M-MA7660LPS.....	11	M-MFRACKGV.....	19	M-MST760RFN.....	18
I-DCCDL.....	83	M-MA7660PS.....	10	M-MFRSLING.....	19	M-MST760OR.....	18
I-DCCWL.....	83	M-MA7860GVPS.....	10	M-MGPUSL.....	14	M-MSTB.....	18
I-EX4PPNCASPY.....	27	M-MA7860LGVPS.....	11	M-MGPUSLGV.....	14	M-MSTBGV.....	18
I-I1CAS5.....	82	M-MA7860LPS.....	11	M-MGR4.....	14	M-MSTGR6060.....	18
I-I1CAS5P.....	20	M-MA7860PS.....	10	M-MGR5.....	14	M-MTA120.....	12
I-I1CAS5RALU.....	83	M-MA12078GV.....	10	M-MGR7.....	14	M-MTA240.....	12
I-I1CAS5SALU.....	83	M-MA12160DEGV.....	10	M-MGR8.....	14	M-MTCSFU.....	13
I-I4CAS5.....	82	M-MBB4UGV.....	15	M-MGR10.....	14	M-MTCFW1.....	13
I-I4CAS5RALU.....	83	M-MBBF.....	15	M-MGR30.....	14	M-MTCFW2.....	13
I-I4CAS5SALU.....	83	M-MBBFGV.....	15	M-MGRMAEX.....	14	M-MTCSFU.....	13
I-I4CW5.....	82	M-MBBS.....	15	M-MGRMAEXGV.....	14	M-MTCSW1.....	13
I-I4CW5RD.....	83	M-MBBSGV.....	15	M-MGT30.....	14	M-MTCSW2.....	13
I-IBBF4.....	25,27,35,41	M-MBC8.....	15	M-MGT60.....	14	M-MTE13100.....	19
I-IBSJP12H4.....	25,27,35,41	M-MBC8HD.....	15	M-MGT84.....	14	M-MTESCREW.....	19
I-ICW5.....	82	M-MBSJP8U24.....	15	M-MGT120.....	14	M-MTOGGLE.....	13
I-ICW5RD.....	83	M-MBSJP24.....	15	M-MHA.....	18	M-MTWA.....	12
I-IMAC.....	37	M-MBSJP24H.....	15	M-MHAGV.....	18	M-MTWAEEY.....	12
I-IMAPN.....	82	M-MBSJP36.....	15	M-MHAP.....	18	M-MTWAFDUK.....	12
I-IMCGR.....	82	M-MBSJPF24.....	15	M-MHP.....	18	M-MTWAGVPL.....	12
I-IMCBOOK.....	82	M-MBSJPSW24.....	15	M-MLA13.....	12	M-MTWAK.....	12
I-IMCN.....	33	M-MBSJPSW24H.....	15	M-MLA13GV.....	12	M-MW71016.....	19
I-IMCNDX.....	31	M-MBSJS24.....	15	M-MLA2931.....	12	M-MW71026.....	19
I-IMCNT.....	32	M-MBSJS24H.....	15	M-MLA2931GV.....	12	M-MWB42.....	21
I-IMIAPA.....	82	M-MBSJS36.....	15	M-MLB.....	13	M-MWB42GV.....	21
I-IMIGRA.....	82	M-MBT11.....	19	M-MLC1.....	13	M-MWC16FP.....	19
I-IMIPA.....	82	M-MC27.7584.....	12	M-MLC1S.....	13	M-MWC26.....	19
I-IMIS.....	30	M-MC27.75120.....	12	M-MLG.....	13	M-PA4B.....	21
I-IMPALU.....	83	M-MC2484.....	12	M-MLS.....	13, 83	M-PA5B.....	21
I-IMPAN.....	82	M-MC2496.....	12	M-MO32.....	15	M-PA6B.....	21
I-IMPNA.....	83	M-MC3684.....	12	M-MO32GV.....	15	M-PA8B.....	21
I-IMPNA.....	82,83	M-MC3696.....	12	M-MPA719.....	17	M-PA10B.....	21
I-IRC.....	28	M-MC4884.....	12	M-MPA819.....	17	M-PA12B.....	21
I-IREX3.....	29	M-MC4896.....	12	M-MPA1019.....	17	M-PA14B.....	21
I-IREX6.....	29	M-MC24120.....	12	M-MPP719.....	17	M-PA16B.....	21
I-IRGR.....	29	M-MC36120.....	12	M-MPP719AS.....	17	M-PA18B.....	21
I-IRO4.....	29	M-MC48120.....	12	M-MPP719RE.....	17	M-PA20B.....	21
I-IRP.....	82	M-MC364884.....	12	M-MPP724.....	17	M-PA21B.....	21
I-IRPP.....	82	M-MC364896.....	12	M-MPP724AS.....	17	M-PA24B.....	21
I-ISEX4PPNCAS.....	25	M-MDB3084.....	12	M-MPP728.....	17	M-PA28B.....	21
I-ISL.....	25,27,35,41	M-MDB6084.....	12	M-MPP819.....	17	M-PA32B.....	21
LD-LD4848DS.....	20	M-MDB30120.....	12	M-MPP1019.....	17	M-PEP7000AL.....	69
LD-LD4848PS.....	20	M-MDB60120.....	12	M-MPP1019AS.....	17	M-PEP7100AL.....	69
LD-LD7248-4MPS.....	20	M-MDNET10BK.....	19	M-MPP1019RE.....	17	M-PEP7200AL.....	69
LD-LD7248DS-4M.....	20	M-MDNET10GN.....	19	M-MPP1024.....	17	M-SHOREPOST0.....	21
LD-LDBJP24.....	20	M-ME20.....	16	M-MPP1024AS.....	17	M-SHOREPOST1.....	21
LD-LDCL.....	20	M-MF60EPS.....	9	M-MRBF.....	21	M-SHOREPOST2.....	21
LD-LDCLS.....	20	M-MF3660GVPS.....	8	M-MS20.....	16	M-SHOREPOST3.....	21
LD-LDGPCL.....	20	M-MF3660PS.....	8	M-MS20GV.....	16	M-SHOREPOST4.....	21
LD-LDLA24.....	20	M-MF4860PS.....	8	M-MS30.....	16	M-TUFSTUD18.....	21
LD-LDLS.....	20	M-MF6030GVPS.....	9	M-MS40.....	16	M-TUFSTUD36.....	21
M-BAA07.....	14	M-MF6030PS.....	9	M-MSJ.....	16	M-TUFSTUD72.....	21
M-BAA08.....	14	M-MF6048PS.....	9	M-MSJARGDGV.....	16	M-TUFSTUD144.....	21
M-BAA10.....	14	M-MF6060GVPS.....	8	M-MSJL.....	16		
M-FASTBOLT1.5.....	21	M-MF6060PS.....	8	M-MSJLOCK.....	16		



NOTES

BUILT TOUGH FOR SAFETY™

Our mission at Metaltech is to develop, manufacture and sell safe, reliable, innovative products that make work easier and faster to execute with built in safety and sturdiness.

We have been building safety into our scaffolding for over 55 years. Innovation, design and great packaging drive us.

We strive to develop and design products specifically suited for each of our market segments; residential and commercial construction, rental and industrial.



BUILT TOUGH FOR SAFETY

**JOBSITE
SERIES**™

BuildMan
Grade

**Fiberglass
Series**™

SAFERSTACK
A METALTECH INNOVATION

**ALU
SERIES**™

**BUILT TOUGH FOR
SAFETY**

METALTECH®

CUSTOMER SERVICE

T : **1 800 363-7587** (TOLL FREE NUMBER)

F : **1 866 517-7585**

@ : **CS@METALTECH.CO**

FOR THE LATEST ADDITIONS TO THE METALTECH
PRODUCTS CATALOG, VISIT OUR ON-LINE CATALOG AT

WWW.METALTECH.CO



FREE

**GET THE
METALTECH
APP!**

SCAFFOLDING CALCULATOR
AND MORE!

Download on the
App Store

GET IT ON
Google Play



SAA



OSHA

ANSI