

FIBERGLASS SERIES™ SCAFFOLDING



The Fiberglass Series™ scaffolding offering is designed for uses when non-conductive, static free or chemical resistance is required. Easy to set up and lighter than steel or aluminum scaffold types, it can quickly be assembled and moved into position.

- **NON-CONDUCTIVE**
- **CHEMICAL ENVIRONMENTS**
- **VERY LIGHT**

Distributed by:

— EST. 1975 —
INDUSTRIAL
LADDER & SUPPLY CO.

Toll-Free: 1-800-833-0800
WWW.INDUSTRIALLADDER.COM



FIBERGLASS SERIES™ SCAFFOLDING

BUILT TOUGH FOR
SAFETY

METALTECH


THE TOWER

TESTED IN CONFORMITY TO CSA STANDARD S269.2 M87

INFO

Imperial units for reference only.

FIBERGLASS SERIES™ SCAFFOLDING

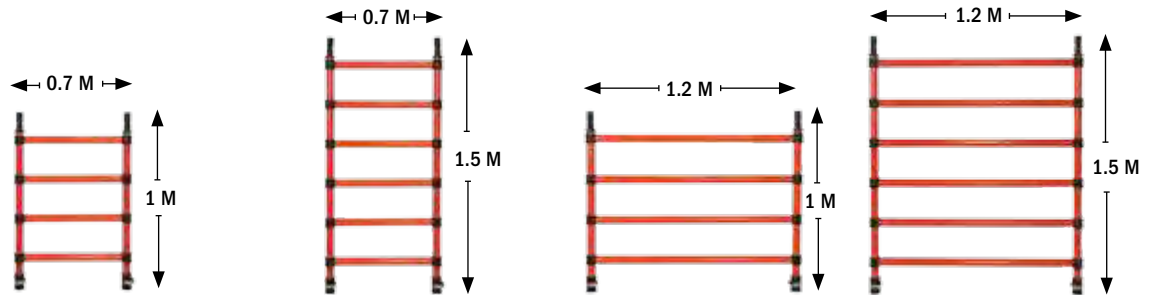

DESCRIPTION	1 X 0.7 M FRAME	1.5 X 0.7 M FRAME	1 X 1.2 M FRAME	1.5 X 1.2 M FRAME
DIMENSIONS (H X W)	1 X 0.7 M (3'-3 3/8" X 2'-3 9/16")	1.5 X 0.7 M (4'-11 1/16" X 2'-3 9/16")	1 X 1.2 M (3'-3 3/8" X 3'-11 1/4")	1.5 X 1.2 M (4'-11 1/16" X 3'-11 1/4")
WEIGHT	4 KG (8.8 LB)	4.8 KG (10.6 LB)	5.4 KG (11.9 LB)	6.8 KG (15 LB)
STANDARDS	CSA - S269.2 M87	CSA - S269.2 M87	CSA - S269.2 M87	CSA - S269.2 M87
MODEL	F-FRA0710L	F-FRA0715L	F-FRA1210L	F-FRA1215L




DESCRIPTION	TOEBOARD BRACKET
DIMENSIONS	N/A
WEIGHT	0.35 KG (0.8 LB)
STANDARDS	CSA - S269.2 M87
MODEL	F-TBBRACK



TOEBOARD			
DIMENSIONS	WEIGHT	STANDARDS	MODEL
0.7 M (2'-3 9/16")	1.1 KG (2.4 LB)	CSA - S269.2 M87	F-TB07
1.2 M (3'-11 1/4")	2.2 KG (4.9 LB)	CSA - S269.2 M87	F-TB12
2.4 M (7'-10 1/2")	4.2 KG (9.3 LB)	CSA - S269.2 M87	F-TB24



THE TOWER ACCESSORIES

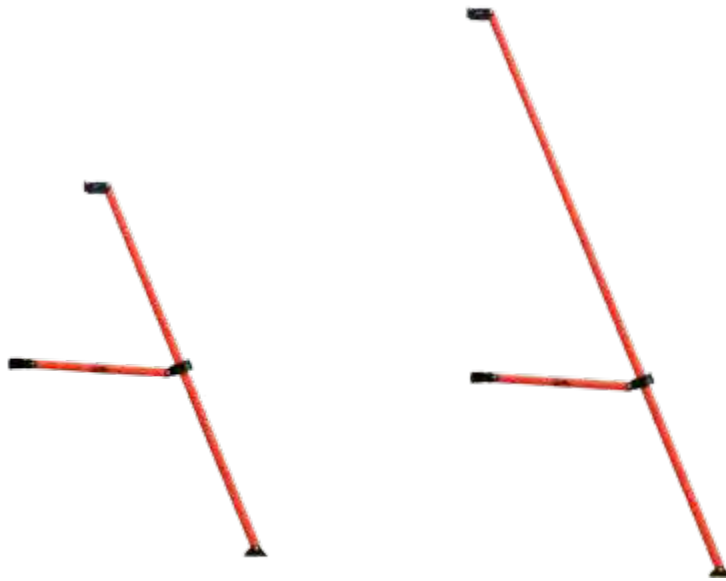


DESCRIPTION	2 M OUTRIGGER	3.05 M OUTRIGGER	CASTER WITH LEVELING JACK
DIMENSIONS	2 M (6'-6 3/4")	3.05 M (10' 3/32")	85 CM (2'-9 15/32")
WEIGHT	3 KG (6.6 LB)	4 KG (8.8 LB)	6.12 KG (13.5 LB)
STANDARDS	CSA - S269.2 M87	CSA - S269.2 M87	CSA - S269.2 M87
MODEL	F-OUT20	F-OUT30	F-ADJ200



BRACE					
DESCRIPTION	DIMENSIONS	WEIGHT	STANDARDS	COLOR ID	MODEL
HORIZONTAL	2.4 M (7'-10 1/2")	2.4 KG (5.3 LB)	CSA - S269.2 M87	YELLOW	F-BRAH24
DIAGONAL	2.6 M (8'-6")	2.81 KG (6.2 LB)	CSA - S269.2 M87	BLUE	F-BRAD24
0.7 M BRACE PLAN	0.7 X 2.4 M (2' X 7'-10 1/2")	2.81 KG (6.2 LB)	CSA - S269.2 M87	RED	F-PBRA0724
1.2 M BRACE PLAN	1.2 X 2.4 M (4' X 7'-10 1/2")	2.9 KG (6.4 LB)	CSA - S269.2 M87	RED	F-PBRA1224

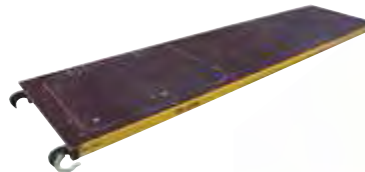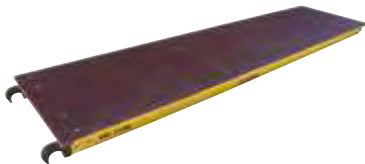

DESCRIPTION	PLATFORM ANTI-SLIP	PLATFORM ANTI-SLIP WITH TRAP DOOR	ACCESS LADDER
DIMENSIONS	2.4 M (7'-10 1/2")	2.4 M (7'-10 1/2")	2.4 - 3.65 M (7'-10 1/2" X 11'-11 11/16")
CAPACITY	226.8 KG (500 LB)	226.8 KG (500 LB)	149.69 KG (330 LB)
WEIGHT	22.27 KG (49.1 LB)	20.28 KG (44.7 LB)	15.47 KG (34.1 LB)
STANDARDS	CSA - S269.2 M87	CSA - S269.2 M87	CSA - S269.2 M87
MODEL	F-DP24	F-DH24	F-LAD2436



GET THE METALTECH APP



FIBERGLASS TOWER KITS

TESTED IN CONFORMITY TO CSA STANDARD S269.2 M87

UP TO 20 TOWER KITS


0.7 M WIDE FIBERGLASS TOWER KITS

MODEL	TOWER KIT DIMENSIONS	F-FRA0710L	F-FRA0715L	F-FRA1210L	F-FRA1215L	F-BRAH24	F-BRAD24	F-PBRA0724	F-PBRA1224	F-DP24	F-DH24	F-ADJ200	F-OUT20	F-OUT30	F-LAD2436	F-TB07	F-TB12	F-TB24	F-TBBRACK
F-KIT0715	1.5 M (4'-11 1/16")	2	2		4	2	1		1		4								
F-KIT0720	2 M (6'-6 3/4")		4		6	4	1		1		4	4			2		2	4	
F-KIT0725	2.5 M (8'-2 7/16")	4	2		6	4	1			1	4	4		1	2		2	4	
F-KIT0730	3 M (9'-10 1/8")	2	4		6	6	1			1	4	4		1	2		2	4	
F-KIT0735	3.5 M (11'-5 25/32")		6		6	6	1			1	4		4	1	2		2	4	
F-KIT0740	4 M (13'-1 15/32")	4	4		6	8	1			1	4		4	1	2		2	4	
F-KIT0745	4.5 M (14'-9 5/32")	2	6		6	8	1			1	4		4	1	2		2	4	
F-KIT0750	5 M (16'-4 27/32")		8		8	8	1			2	4		4	2	2		2	4	

1.2 M WIDE FIBERGLASS TOWER KITS

F-KIT1215	1.5 M (4'-11 1/16")			2	2	4	2		1	2		4							
F-KIT1220	2 M (6'-6 3/4")				4	6	4		1	2		4				2	2	4	
F-KIT1225	2.5 M (8'-2 7/16")			4	2	6	4		1	1	1	4		1		2	2	4	
F-KIT1230	3 M (9'-10 1/8")			2	4	6	6		1	1	1	4		4	1		2	2	4
F-KIT1235	3.5 M (11'-5 25/32")				6	6	6		1	1	1	4		4	1		2	2	4
F-KIT1240	4 M (13'-1 15/32")			4	4	6	8		1	1	1	4		4	1		2	2	4
F-KIT1245	4.5 M (14'-9 5/32")			2	6	6	8		1	1	1	4		4	1		2	2	4
F-KIT1250	5 M (16'-4 27/32")				8	8	10		1	1	2	4		4	2		2	2	4
F-KIT1255	5.5 M (18' 17/32")			4	6	8	10		1	1	2	4		4	2		2	2	4
F-KIT1260	6 M (19'-8 7/32")			2	8	8	12		1	1	2	4		4	2		2	2	4
F-KIT1265	6.5 M (21'-3 29/32")			6	6	8	12		1	1	2	4		4	2		2	2	4
F-KIT1270	7 M (22'-11 19/32")			4	8	8	14		1	1	2	4		4	2		2	2	4

Imperial unit for approximate reference

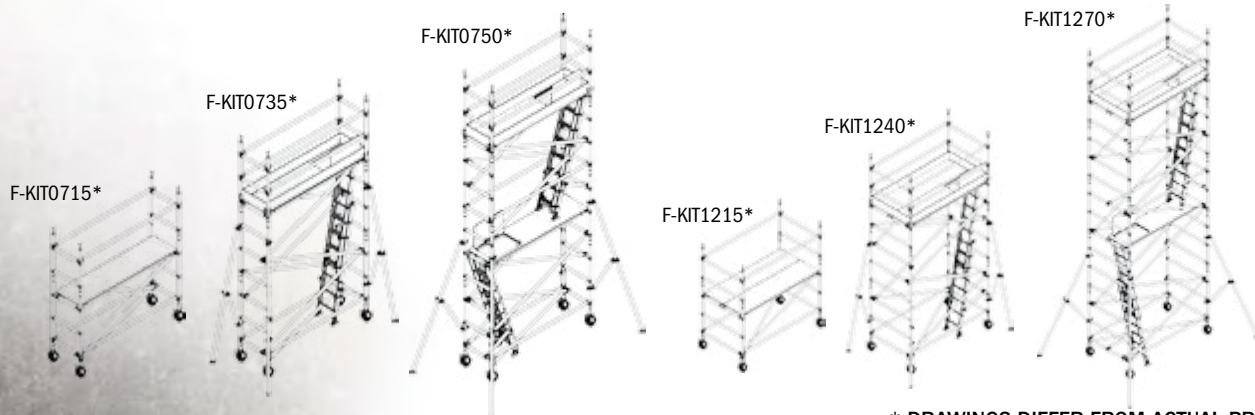

* DRAWINGS DIFFER FROM ACTUAL PRODUCTS

FIBERGLASS SERIES™ SCAFFOLDING

SPEEDY™ SCAFFOLDING

TESTED IN CONFORMITY TO CSA STANDARD S269.2 M87



INFO

Imperial units for reference only.

3 m
REACH

227 kg
LOAD CAPACITY

ASSEMBLED DIMENSIONS (W X D X H)	196 X 74 X 196 CM (77 3/16 X 29 1/8 X 77 3/16 IN.)
PACKAGE DIMENSIONS (W X D X H)	78 X 206 X 27 CM (30 3/4 X 81 1/8 X 10 5/8 IN.)
WEIGHT	43.5 KG (96 LB)
LOAD CAPACITY	227 KG (500 LB)
REACH	3 M (9' 10 1/8")
PLATFORMS	ANTI-SLIP
STRUCTURE	5 CM (2 IN.) TUBULAR FIBERGLASS
CASTERS	13 CM (5 IN.) DOUBLE LOCKING HEAVY DUTY
STANDARD	TESTED IN CONFORMITY TO CSA STANDARD S269.2 M87
MODEL	F-ISPC
UPC	778300700660

FIBERGLASS SERIES™ SCAFFOLDING



- » Compact storage
- » Easily assembled




- » Light weight
- » Corrosion resistant



- » Non conductive
- » Prevent static electricity

INFO



BUILT TOUGH FOR
SAFETY

METALTECH