




# A21 1004

## Pour-in Disposable Anchor Strap

### FEATURES

- Black 1¾ inch high strength polyester webbing
- 2 inch polyester protective sleeve
- Meets the requirements of ANSI Z359.1-07
- Minimum tensile break strength of 5,000 pounds
- 2¼ inch zinc plated steel D-Ring meeting ANSI Z359.12 with a minimum tensile break strength of 5,000 pounds with a 100% 3,600 pound proof test.

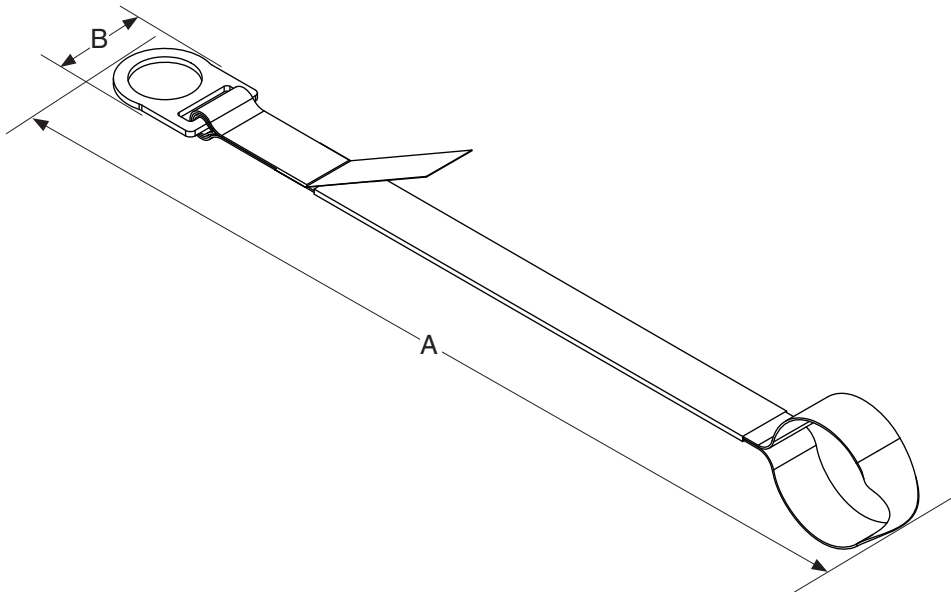

### SPECIFICATIONS

Model No.	(A)	(B)	Depth	Capacity	Aprox. Weight	Compliance Standards
A211004	48 in (122 cm)	2⅞ in (73 mm)	⅝ in (8 mm)	310 lb (141 kg)	0.8 lbs (363 g)	ANSI Z359.1-07 OSHA 29 CFR 1910 & 1926

**⚠ WARNING:** Compliant fall protection equipment must only be used as it was designed. Users **MUST** read and understand all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.66 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

## Technical Data Sheet

WERNER CO. CORPORATE HEADQUARTERS: 93 Werner Rd., Greenville, PA 16125-9499

TEL: 888-523-3370 FAX: (724) 588-0315 [www.wernerco.com](http://www.wernerco.com)