9500SERIES

Fibermax Extension Ladder


Great for use around electrical applications



Heavy duty round fiberglass rungs



Aluminum locks



Steel shoes with durable rubber treads










1 act

1 IIII



9500SERIES

- All fiberglass rails and rungs
- Type IA, 300lbs. load capacity
- · Rail and run are reinforced with nylon plugs
- Spring assisted locks with plastic flippers
- Unique box beam rails are connected with a fiberglass rung
- Durable rubber and spur foot combination

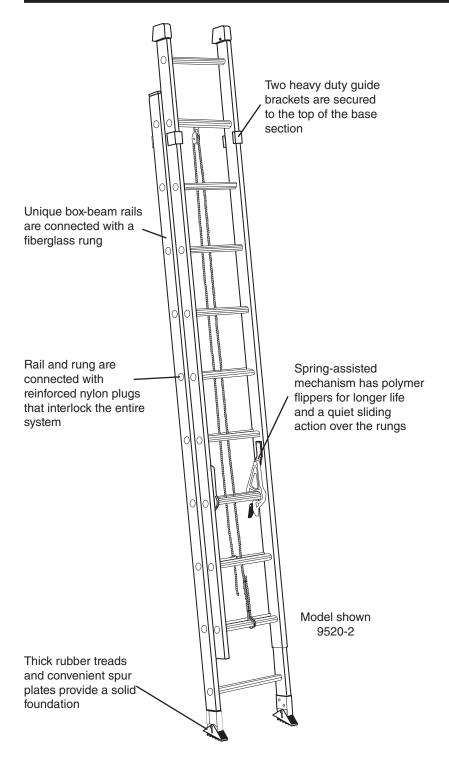



Type IA Duty Rating

SPECIFICATIONS 9500-1 & -2 MODEL

9500-1 Series						
Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.				
8'	5.5	18.0				
10'	6.8	22.0				
12'	8.0	26.0				
14'	9.4	30.0				
16'	10.7	34.0				
18'	11.2	38.0				
20'	12.5	42.0				
	Total Length 8' 10' 12' 14' 16' 18'	Approx. Total Cu. Ft. Length Per Unit 8' 5.5 10' 6.8 12' 8.0 14' 9.4 16' 10.7 18' 11.2				

9500-2 Series

Model No.	Total Length Sections	Maximum Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
9516-2	16'	13'	8.3	41.0
9520-2	20'	17'	10.2	49.0
9524-2	24'	21'	12.2	56.0
9528-2	28'	25'	14.1	64.0
9532-2	32'	29'	16.0	72.0

DIMENSIONS

Rails:	3-1/4" wide	Rungs:	1-3/16" wide
Flange:	1-3/16" wide	Ladder Width:	18-3/8" outside shoes