



R330010


Max Patrol Self Retracting Lifeline

FEATURES

- 10 foot working range
- 3/4 inch Dyneema® / polyester webbing with WebAlert™
- High Impact Nylon housing
- Swivel top with steel carabiner included
- Snap hooks and carabiners are self-locking with a minimum tensile break strength of 5,000 pounds, and a 3,600 pound gate rating


MADE WITH

WebAlert™
INSPECTABLE WEBBING



MAX PATROL™

Self Retracting Lifeline

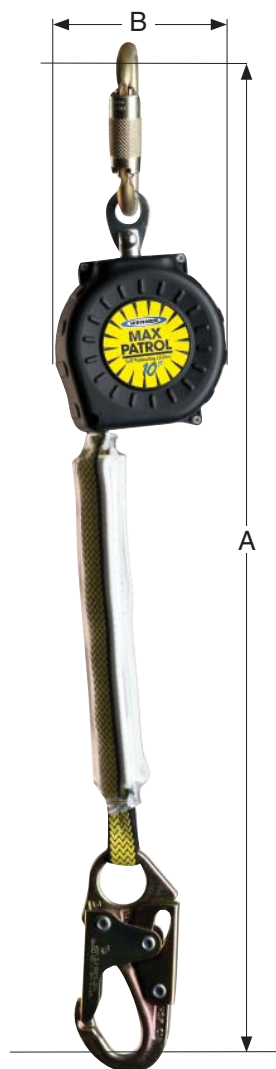

SPECIFICATIONS

Model No.	Lifeline Connector	(A)	(B)	Depth	Aprox. Weight
R330010	Steel Snap hook	25 in (635 mm)	4 5/16 in (109 mm)	2 9/32 in (58 mm)	2.5 lbs (1.1 kg)

COMPLIANCE STANDARDS

Meets	Maximum Arrest Distance	Average Arrest Force	Maximum Arrest Force	Free Fall Limit	Capacity
ANSI Z359.14-2012 CLASS B	54 in (1372 mm)	900 lbf (4 kN)	1,800 in (8 kN)	24 in (610 mm)	130 - 310 lbs (59 - 141 kg)
OSHA 29 CFR 1910.66 & 1926.502	42 in (1,067 mm)	N/A	1,800 in (8 kN)	24 in (610 mm)	400 lbs (181 kg)

⚠ WARNING: Compliant fall protection equipment must only be used as it was designed. Users MUST read and understand all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.66 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

Technical Data Sheet

WERNER CO. CORPORATE HEADQUARTERS: 93 Werner Rd., Greenville, PA 16125-9499

TDSR330010 Rev A ©2017 Werner Co. 7/17

TEL: 888-523-3370 FAX: (724) 588-0315 www.wernerco.com