



T340018


Rescue Ladder with Belay System

FEATURES

- 2 inch heavy duty nylon web ladder
- Aluminum bar rungs sewn into nylon web
- Progress capture pulley (Belay device)
- Static $\frac{7}{16}$ inch kernmantle nylon rope
- Ballistic nylon deployment bag
- Carabiners are self-locking with a minimum tensile break strength of 5,000 pounds, and a 3,600 pound gate rating

SPECIFICATIONS

Model No.	Lifeline Connector	(A)	(B)	Depth	Approx. Weight
T340018	Steel Carabiner	18 ft (5.48 m)	9 $\frac{1}{4}$ in (235 mm)	2 in (51 mm)	8.2 lbs (3.7 kg)

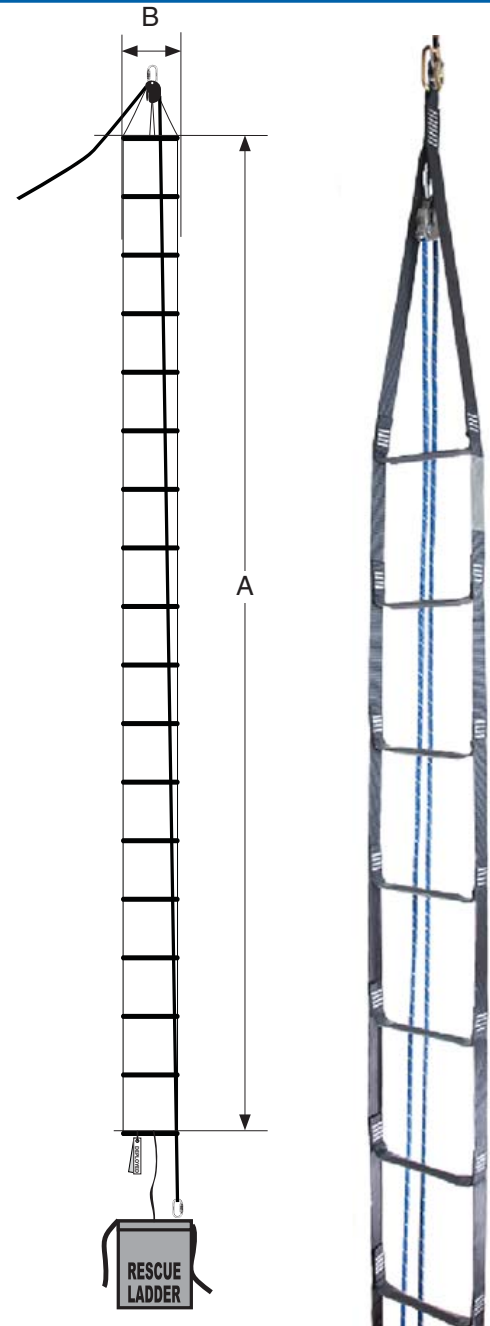

WARNING: Compliant fall protection equipment must only be used as it was designed. Users MUST read and understand all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to follow these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

Technical Data Sheet