




# H93400X

## Arc Flash Full Body Harness

### FEATURES

- Meets requirements of ASTM F887
- 1¾ inch Kevlar® Webbing
- Dielectric Hardware
- SIGMA™ flame resistant (FR) Backpad and protective label cover
- Built in Relief Straps assist user to reach a gravity override seated position after a fall arrest

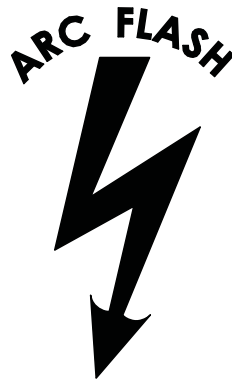

### SPECIFICATIONS

Model No.	Size	D-Rings	D-Ring Material	Chest Connection	Leg Connection	Capacity	Approx. Weight	Compliance Standards
H934001	Small	Back; Hip	Dielectric	Pass-Thru	Pass-Thru	400 lbs (181 kg)	4.4 lbs (2.0 kg)	ANSI Z359.11 OSHA 29 CFR 1910 & 1926
H934002	Medium/Large	Back; Hip	Dielectric	Pass-Thru	Pass-Thru	400 lbs (181 kg)	4.5 lbs (2.0 kg)	ANSI Z359.11 OSHA 29 CFR 1910 & 1926
H934004	X-Large	Back; Hip	Dielectric	Pass-Thru	Pass-Thru	400 lbs (181 kg)	4.5 lbs (2.1 kg)	ANSI Z359.11 OSHA 29 CFR 1910 & 1926
H934005	XX-Large	Back; Hip	Dielectric	Pass-Thru	Pass-Thru	400 lbs (181 kg)	4.6 lbs (2.1 kg)	ANSI Z359.11 OSHA 29 CFR 1910 & 1926

**⚠ WARNING:** Compliant fall protection equipment must only be used as it was designed. Users MUST read and understand all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to follow these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

# Technical Data Sheet